
INDEX

1. LOCATION MAP OF PROJECT CONSTRUCTION
2. PAVING CONSTRUCTION PLAN
3. DRAINAGE CONSTRUCTION PLAN
4. ELECTRICAL CONSTRUCTION PLAN
5. PAVEMENT CROSS-SECTIONS
6. ENERGY PLANT IMPROVEMENT & AREA WATERING SYSTEM
7. AREA WATERING SYSTEM
8. CHAIN-LINK FENCE DETAILS
9. 2' x 5' INLET STANDARD

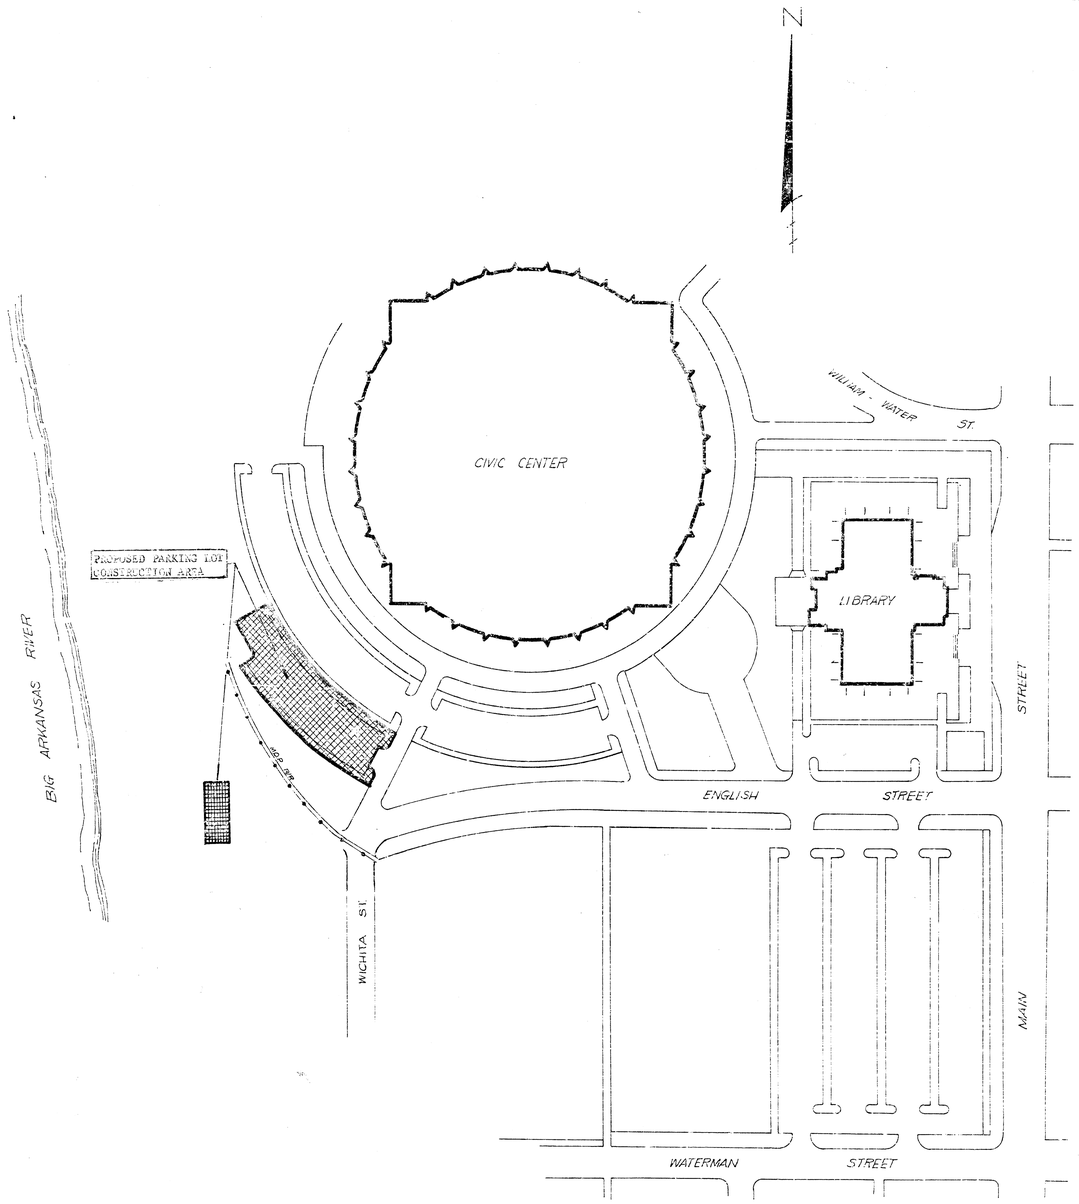

16. 32 TONS (RITCHIE BROS. OR EQUAL) RIVER BED GRAVEL
17. 5 EA. 3' x 3' x 2' CONCRETE BLOCKS REMOVED

PAVEMENT ITEMS:
1. 240 LIN. FT. NON-STANDARD CURB & GUTTER
2. 311 LIN. FT. STANDARD CURB & GUTTER
3. 1444 SQ. YDS. ASPHALT CONCRETE PAVEMENT (4½" BASE COURSE & 1½" SURFACE COURSE)
4. 2434 SQ. FT 4" REINF. CONCRETE WALK
5. 492 CU. YDS. EXCAVATION
6. 1 ADJUSTED MANHOLE
7. 1675 SQ. YDS. SUB-GRADE MANIPULATION
8. 21 TONS LIME OR CEMENT
9. 140 CU. YDS. COMPACTED FILL
10. 865 LIN. FT. PARKING STALL STRIPING (BY OTHERS)
11. 48 PARKING METERS (BY OTHERS)
12. 78 SQ. YDS. 8" REINF. CONCRETE PAVEMENT
13. 9 EA. 4" STEEL POSTS INSTALLED (INCLUDES CONCRETE
14. 231 LIN. FT. CONCRETE REINF. CONCRETE RETAINING
15. 156 LIN. FT. 8' HIGH (9 GAGE) (2" MESH) CHAIN-LINK
INSTALLED COMPLETE WITH

MECHANICAL ITEMS: (SYSTEM WATER SUPPLY & AREA WATERING
1. 70 LIN. FT. 12" R.C.P.
2. 1 2' x 2' INLETS
3. 15 TONS SANDFILL
4. 50 LIN. FT. PIPESTEM
5. 1 PIPE PLUG
6. 7 ADJUSTED MANHOLES
7. 387 LIN. FT. 2" P.V.C. PIPE INSTALLED
8. 3 EA. HYDRANTS VALVES AND VALVES
1 EA 2" x 2" TAPS

ELECTRICAL ITEMS:
1. 250 LIN. FT. #10 WIRE (FURNISHED)
2. 170 LIN. FT. 3/4" P.V.C. RIGID CONDUIT (FURNISHED)
3. 90 LIN. FT. 2" PVC DUCTED WITH SWEEP BENDS
4. 8 LIGHT POLES, (COMPLETE) BASES, FIXTURES, GROUND
FITTINGS, CONDUIT, WIRES &
5. 1 ANCHOR UNIT

NOTE: CONTRACTOR SHALL BE RESPONSIBLE FOR ALL UTILITIES AND SHALL BE RESPONSIBLE FOR REPAIRING DAMAGES OF ALL KINDS.

LANDSCAPING AND PARKS AT LARGE

1. 7,500 square yards warrick's K-20 or 3 grass
2. 400 cubic yards topsoil, by others.
3. 10 Austrian or Scotch Pines 5-6', by others.
4. 27 Sales Pearmass (6 ea. ft.), by others.

CENTURY II PARKING LOT
CITY OF WICHITA, KANSAS
R.W. LINN CITY ENGINEER
DATE: PROJ. No. DGRB50