

- 16. 52 TONS (RICHIE BROS. OR EQUAL) RIVER BED GRAVEL
- 17. 5 EA. 3' x 3' x 2' CONCRETE BLOCKS REMOVED

- PAVEMENT ITEMS:
- 1. 240 LIN. FT. NON-STANDARD COMBINED CURB & GUTTER
 - 2. 311 LIN. FT. STANDARD COMBINED CURB & GUTTER
 - 3. 1444 SQ. YDS. ASPHALT CONCRETE PAVEMENT (4" BASE COURSE & 1" SURFACE COURSE)
 - 4. 2434 SQ. FT. 4" REINF. CONCRETE WALK
 - 5. 492 CU. YDS. EXCAVATION
 - 6. 1 ADJUSTED MARHOLE
 - 7. 1675 SQ. YDS. SUB-GRADE MANIPULATION
 - 8. 21 TONS LIME OR CEMENT
 - 9. 140 CU. YDS. COMPACTED FILL
 - 10. 865 LIN. FT. PARKING STALL STRIPING (BY OTHERS)
 - 11. 48 MARKING METERS (BY OTHERS)
 - 12. 78 SQ. YDS. 6" REINF. CONCRETE PAVEMENT
 - 13. 9 EA. 4" STEEL POSTS INSTALLED (INCLUDES CONCRETE)
 - 14. 231 LIN. FT. CONCRETE REINF. CONCRETE RETAINING WALL
 - 15. 256 LIN. FT. 6' HIGH (9 GAGE) (2" REBAR) CHAIN-LINK FENCE INSTALLED COMPLETE WITH GATES DESIGNATED

- MECHANICAL ITEMS: (5" DIA. WATER SERVICE) AREA VARIATIONS:
- 1. 70 LIN. FT. 1 1/2" R.C.P.
 - 2. 1 2' x 2' MANHOLE
 - 3. 15 TONS SANDFILL
 - 4. 30 LIN. FT. FLESHING
 - 5. 1 PIPE BUNG
 - 6. 1 ADJUSTED MANHOLE
 - 7. 337 LIN. FT. 2" P.V.C. PIPE INSTALLED
 - 8. 3 EA. MANHOLE VALVES INS. W/GRIP
 - 9. 1 EA. 2' x 2' TIE-IN


- HYDROLOGICAL ITEMS:
- 1. 100 LIN. FT. #10 WIRE (INSTALLED)
 - 2. 100 LIN. FT. 1/2" P.V.C. ALUM. CORR. FC. (INSTALLED)
 - 3. 20 LIN. FT. 2" HD. DIPSID W/HD. STAIN. STEEL (INSTALLED)
 - 4. 20 LIN. FT. (CONCRETE) HOUS. FITTINGS, CHECK VALVES, FITTINGS, PIPING, ETC. (INSTALLED)
 - 5. 1 MANHOLE GATE

NOTE: CONTRACTOR TO BE RESPONSIBLE FOR SUPPLYING CORRECT QUANTITIES OF ALL MATERIALS.

LANDSCAPING AND TREES AT LINES

- 1. 1300 square yards Warren's A-28 Blue Grass Sod
- 2. 100 cubic yards topsoil, by others.
- 3. 10 Austrian or Saxon Pines 4-10' by others.
- 4. 27 Sales Features (6 sq. ft.), by others.

- INDEX
- 1. LOCATION MAP OF PROJECT CONSTRUCTION
 - 2. EAVING CONSTRUCTION PLAN
 - 3. DRAINAGE CONSTRUCTION PLAN
 - 4. ELECTRICAL CONSTRUCTION PLAN
 - 5. PAVEMENT CROSS-SECTIONS
 - 6. ENERGY PLANT IMPROVEMENT & AREA WATERING SYSTEM
 - 7. AREA WATERING SYSTEM
 - 8. CHAIN-LINK FENCE DETAILS
 - 9. 2' x 5' INLET STANDARD

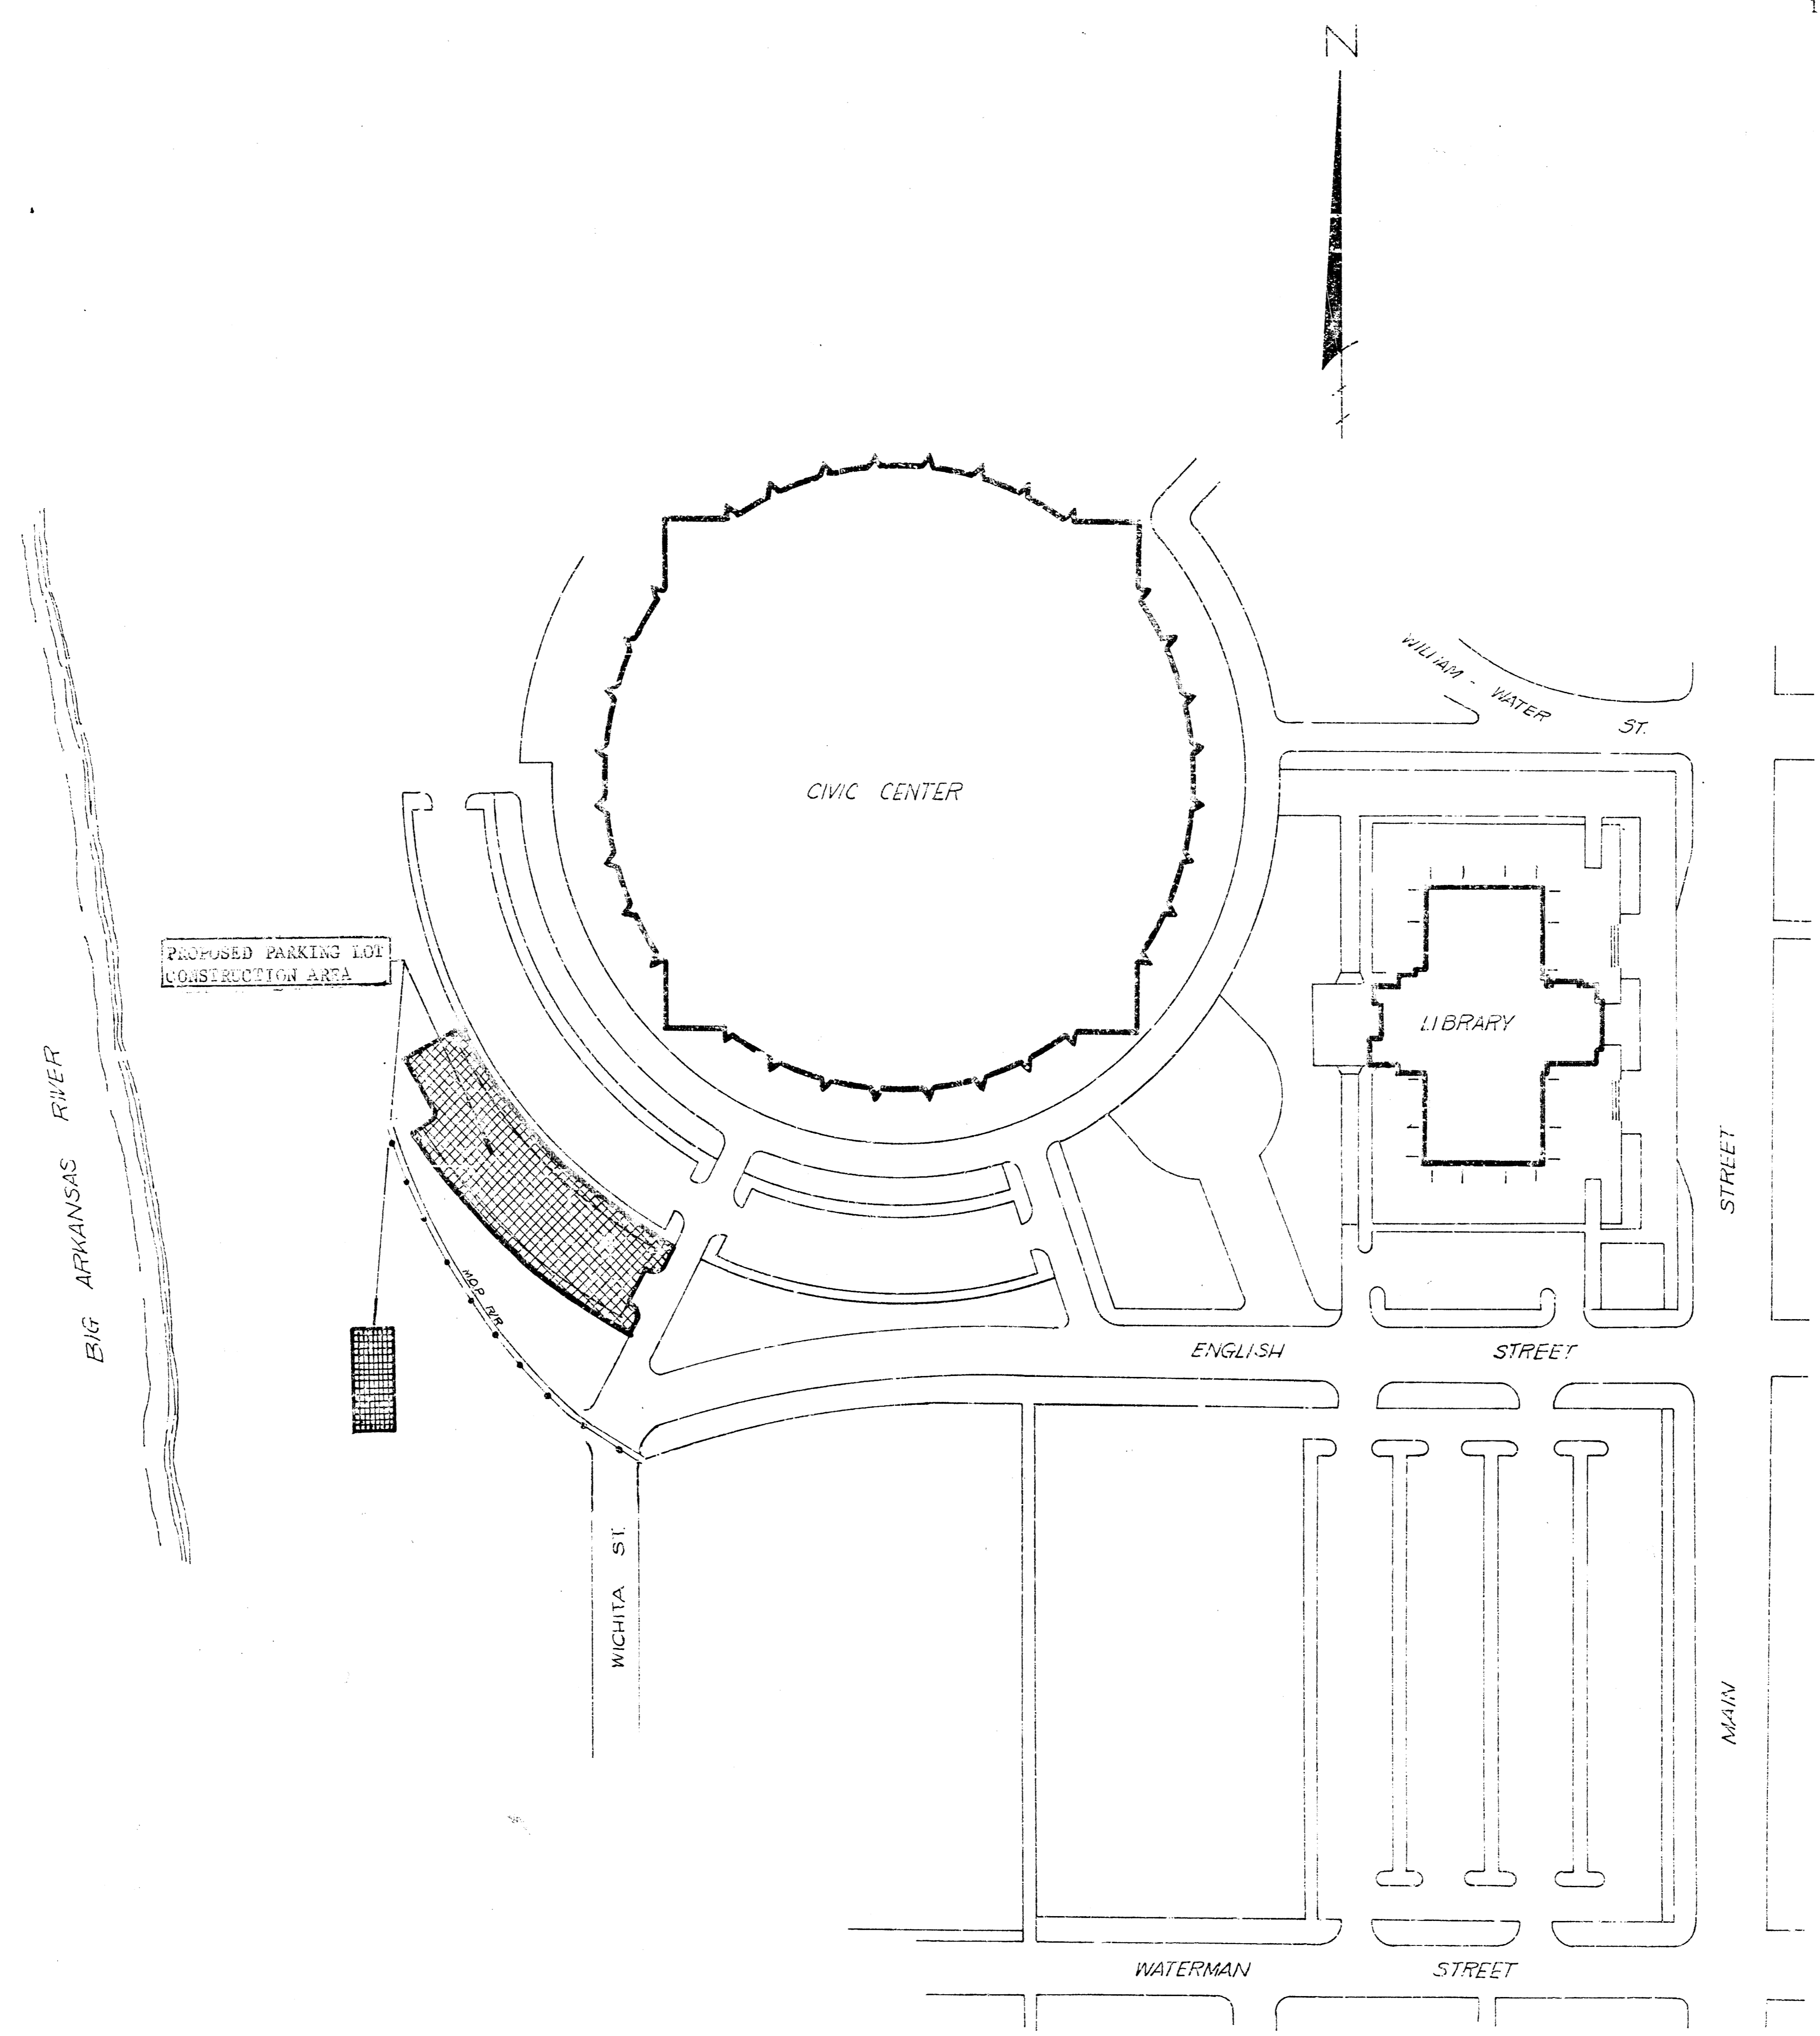

CENTURY II PARKING LOT
 CITY OF WICHITA, KANSAS
 R.W. LINN CITY ENGINEER
 DATE: PROJ. No. DGK8500