

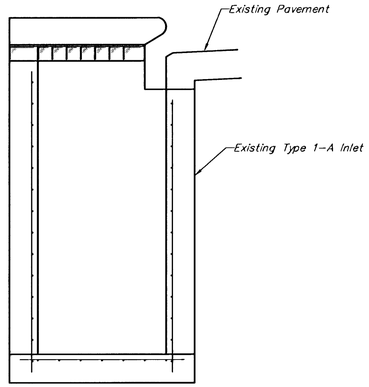


EXISTING TYPE 1–A INLETS
(Reinforced Concrete Walls)

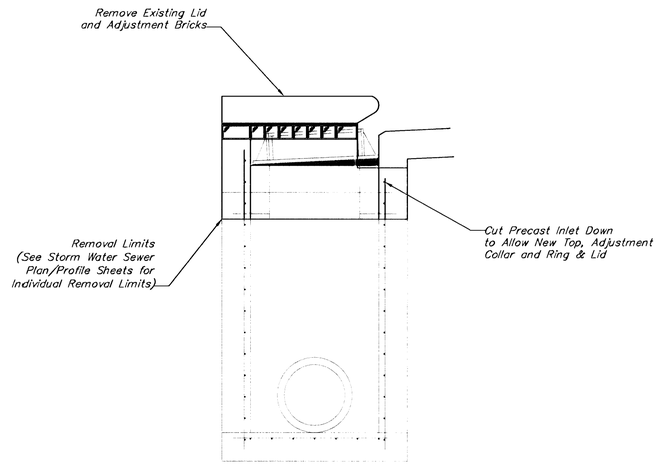

MINIMUM REMOVAL LIMITS
(Reinforced Concrete Walls)

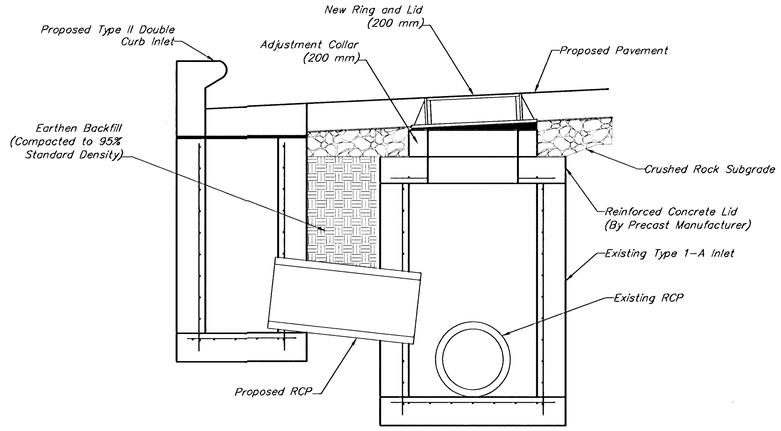

TYPE II INLETS WITH TYPE I–A CONVERSIONS TO MANHOLES

GENERAL NOTES:

All Type 1–A inlets shall be free of major stuctural defects before they are converted to manholes.

The precast concrete lid shall be sized be the Precast Manufacturer's Engineer.

The removal of the top part of the existing Type 1–A's shall be performed by the least destructive method possible so as not to crack the remaining structure. Removal method shall be approved by the Engineer before construction starts.

THE CITY OF WICHITA
CITY ENGINEER'S OFFICE
CITY HALL – SEVENTH FLOOR
455 NORTH MAIN STREET
WICHITA, KANSAS 67202
(316) 268-4501
(316) 268-4114 FAX

STANDARD TYPE 1-A INLET CONVERSION to SQUARE MANHOLE

NEIL D. CABLE P.E. – CITY ENGINEER

PROJECT NUMBER	OCA #
472-83685	706852

DATE MAR 96