

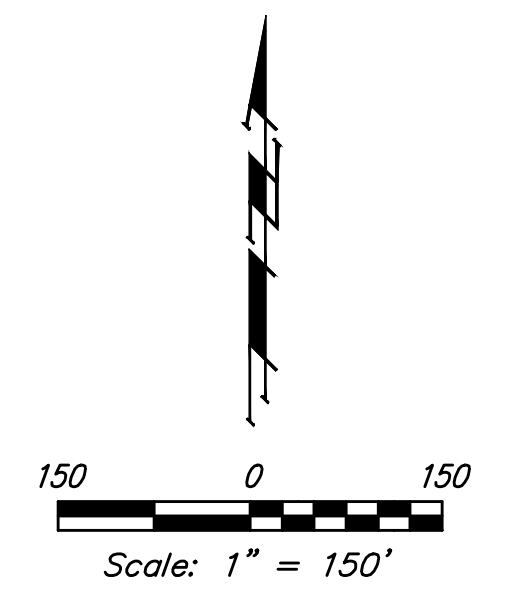


BENCHMARKS:
 RR spike in asphalt, SW COR., N1/2, SW1/4, Sec. 34, TWP. 26-S, R-2-E. Elev. = 1400.59 NAVD88
 RR spike in E. face of power pole, 174± N. of S. line, N1/2, SW1/4 & 49± E. of W. line, SW1/4, Sec. 34, TWP. 26-S, R-2-E. Elev. = 1398.64 NAVD88
 RR spike in S. face of power pole, 294± S. of N. line, SW1/4, & 48± E. of W. line, SW1/4, Sec. 34, TWP. 26-S, R-2-E. Elev. = 1386.14 NAVD88

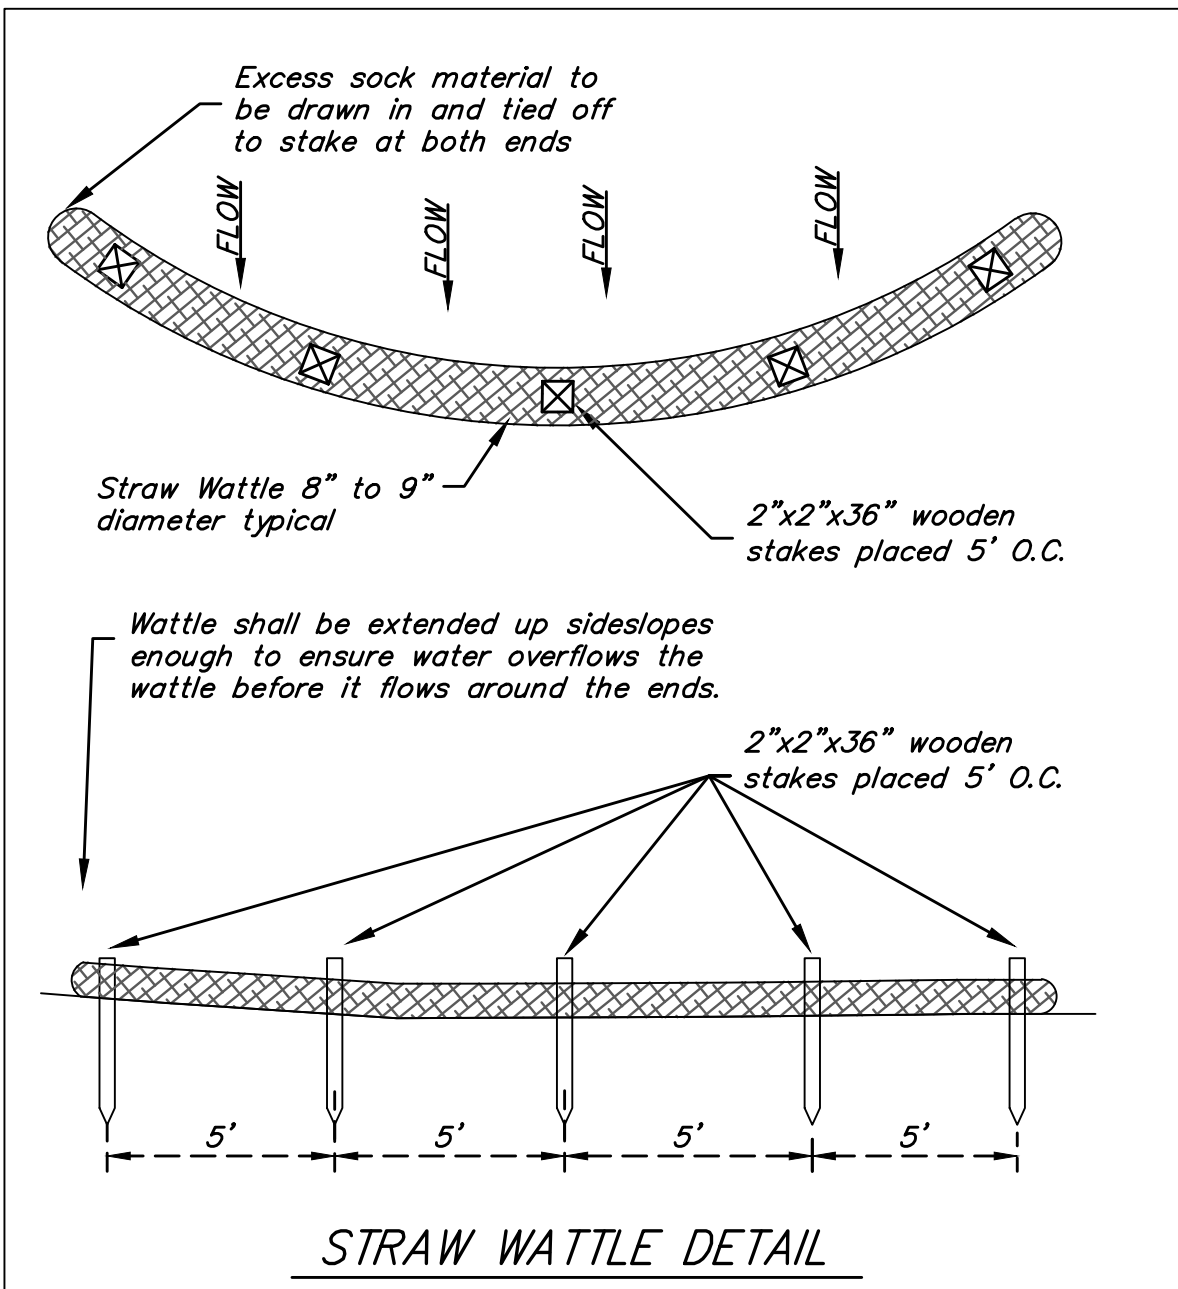

Existing Ground ——— 1.364 ———
 Proposed Grade ——— 1.364 ———
 by SWD Contractor


NOTES:
 1. Contractor shall make sure all erosion control is in place before project is accepted. This plan represents the minimum standard. Any additional erosion control measures shall be installed by the Contractor as needed.
 2. All areas disturbed during construction shall be seeded, mulched, and fertilized as per Cover Sheet General Notes.

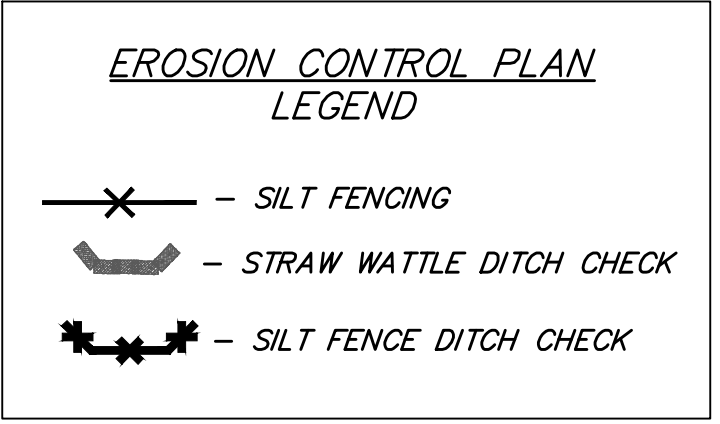

NOTES:
 1. All material to meet manufacturer specifications.
 2. Ditch Check should be used in areas that drain 10 acres or less.
 3. Sediment should be removed from behind check dam once the accumulated height has reached 1/2 height of the check dam.
 4. Check dam can be direct seeded at the time of installation.

EROSION CONTROL MEASURE	INSTALL	MAINTAIN
CONSTRUCTION ENTRANCE (EA)	0	1
SILT FENCE (LF)	0	1,875
STRAW WATTLE DITCH CHECK (EA)	16	0
STRAW BALE DITCH CHECK (EA)	0	9

* ALL EXISTING BMPs INCLUDING CONSTRUCTION ENTRANCE, SEDIMENT BARRIERS, AND SILT FENCE SHALL BE MAINTAINED AND REPAIRED IF NECESSARY.

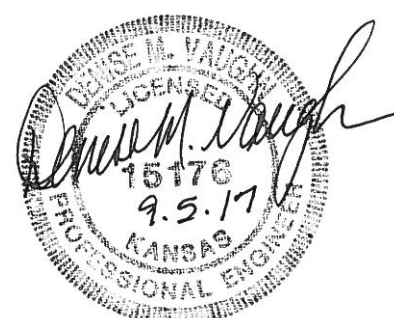

Baughman Brookfield Addition
EROSION CONTROL
 Water Main Improvements

Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316-262-7271 F 316-262-0149
 ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

PROJECT NUMBER 448-90803	DESIGN DMV	DRAWN JAK
REVISIONS:	APPROVED	DATE 9/05/17
	SCALE Noted	SHEET 12 OF 21

I:\Projects\Brookfield Addition_1604P190\Engineering\WTR MAIN_1608-539\WTRMAIN PLANS.dwg