

PLAN ___ REF. ___
CHECKED ___


Note:
Field Engineer to Establish Grade of New 12" R.C.P. to Insure Drainage of Catch Basin.
Sand Fill or Flush all Excavation

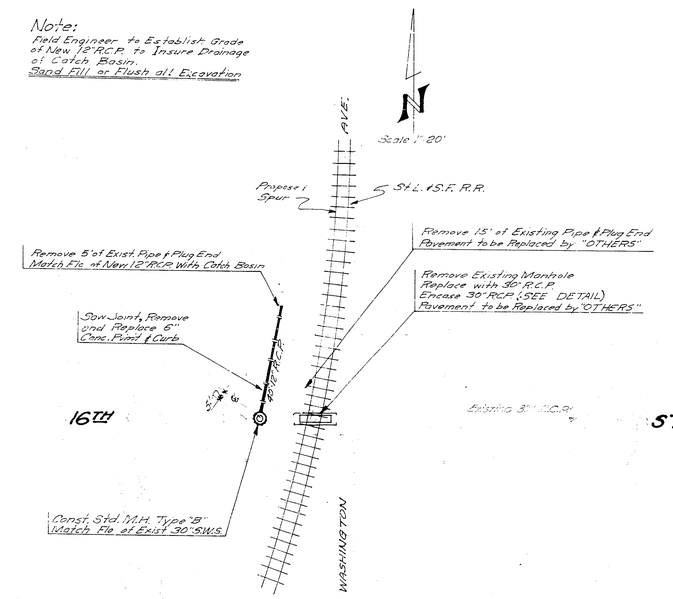

* BILL OF MATERIALS *		
Quant.	Unit	Item
40	L.F.	12" Reinforced Conc. Pipe
16	L.F.	30" " "
1	Ea.	Type "B" Std. M.H.
130	L.F.	Saw Joint
2	Ea.	Pipe Plugs
	S.Y.	Pavement Remove
	C.Y.	6 Sk. Conc. Encasement

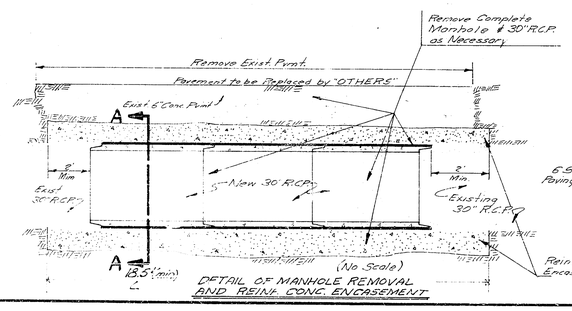

DETAIL OF MANHOLE REMOVAL AND REINF. CONC. ENCASEMENT



SECTION A-A
(No Scale)

MANHOLE RELOCATION
IN CONNECTION WITH PROPOSED SPUR OF ST. L. & S.F. R.R.
16TH ST. & WASHINGTON AVE.
CITY OF WICHITA, KANS.
DATE OCT. '67 PRIVATE JOB