

B.M. 119.03 "G" in Globe East curb of Doris @ S.L. FIRST ST.

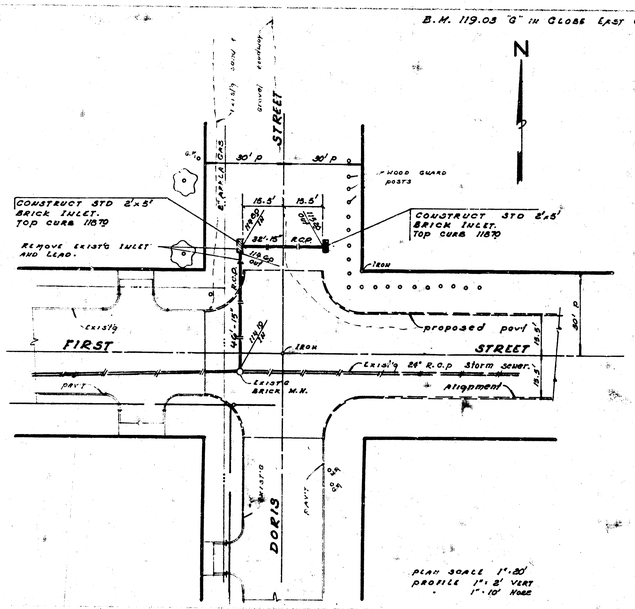

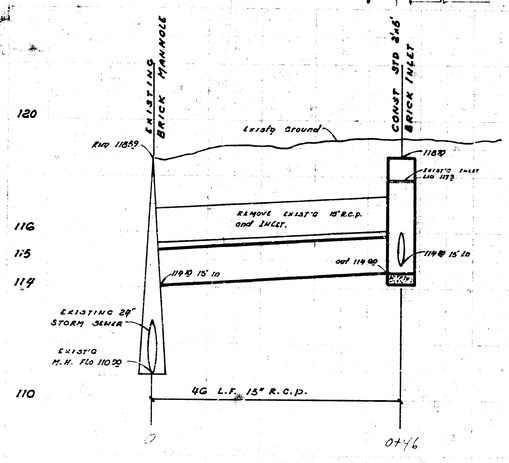

"INCIDENTAL DRAINAGE" in connection with paving FIRST STREET from W.L. DORIS ST to E.L. BEBL ST.

CITY OF WICHITA, KANSAS
R.W. LINN CITY ENGINEER
DATE Feb 1971 PROJ No. DAKO572053

DONALD E. SCHNEIDER 6311 REGISTERED PROFESSIONAL ENGINEER STATE OF KANSAS


1

11 a 3 (3)

BM #1 119.03 "G" In Globe East Curb Of Doris + The SL First Street.
BM #2 120.55 N.W. Cor. Concrete Step #142 N. Clara.
BM #3 117.97 "G" In Globe East Curb 3' S. Of S.L. First Street.

NOTE: REMOVAL OF GUARD POST SHALL NOT BE PAID FOR DIRECTLY AND THE COST FOR THIS WORK SHALL BE CONSIDERED AS SUBSIDIARY TO THE OTHER ITEMS OF WORK.

NOTE: CONTRACTOR TO GRADE GRAVEL ROADS ON THE NORTH SIDE OF FIRST STREET AT DORIS AND CLARA TO MATCH NEW PAVEMENT. CONTRACTOR SHALL ALSO GRADE GRAVEL ROAD ON FIRST STREET AT THE EAST END OF PROJECT TO MATCH NEW PAVEMENT. THIS WORK OF GRADING GRAVEL ROADS TO MATCH NEW PAVEMENT SHALL NOT BE PAID FOR DIRECTLY AND SHALL BE CONSIDERED AS SUBSIDIARY TO THE OTHER ITEMS OF WORK. WHEN GRAVEL IS USED TO REPLACE THE EXISTING GRAVEL SURFACE, AS ORDERED BY THE ENGINEER, IT SHALL BE PAID FOR AT THE PRICE BID PER TON OF ROAD GRAVEL.

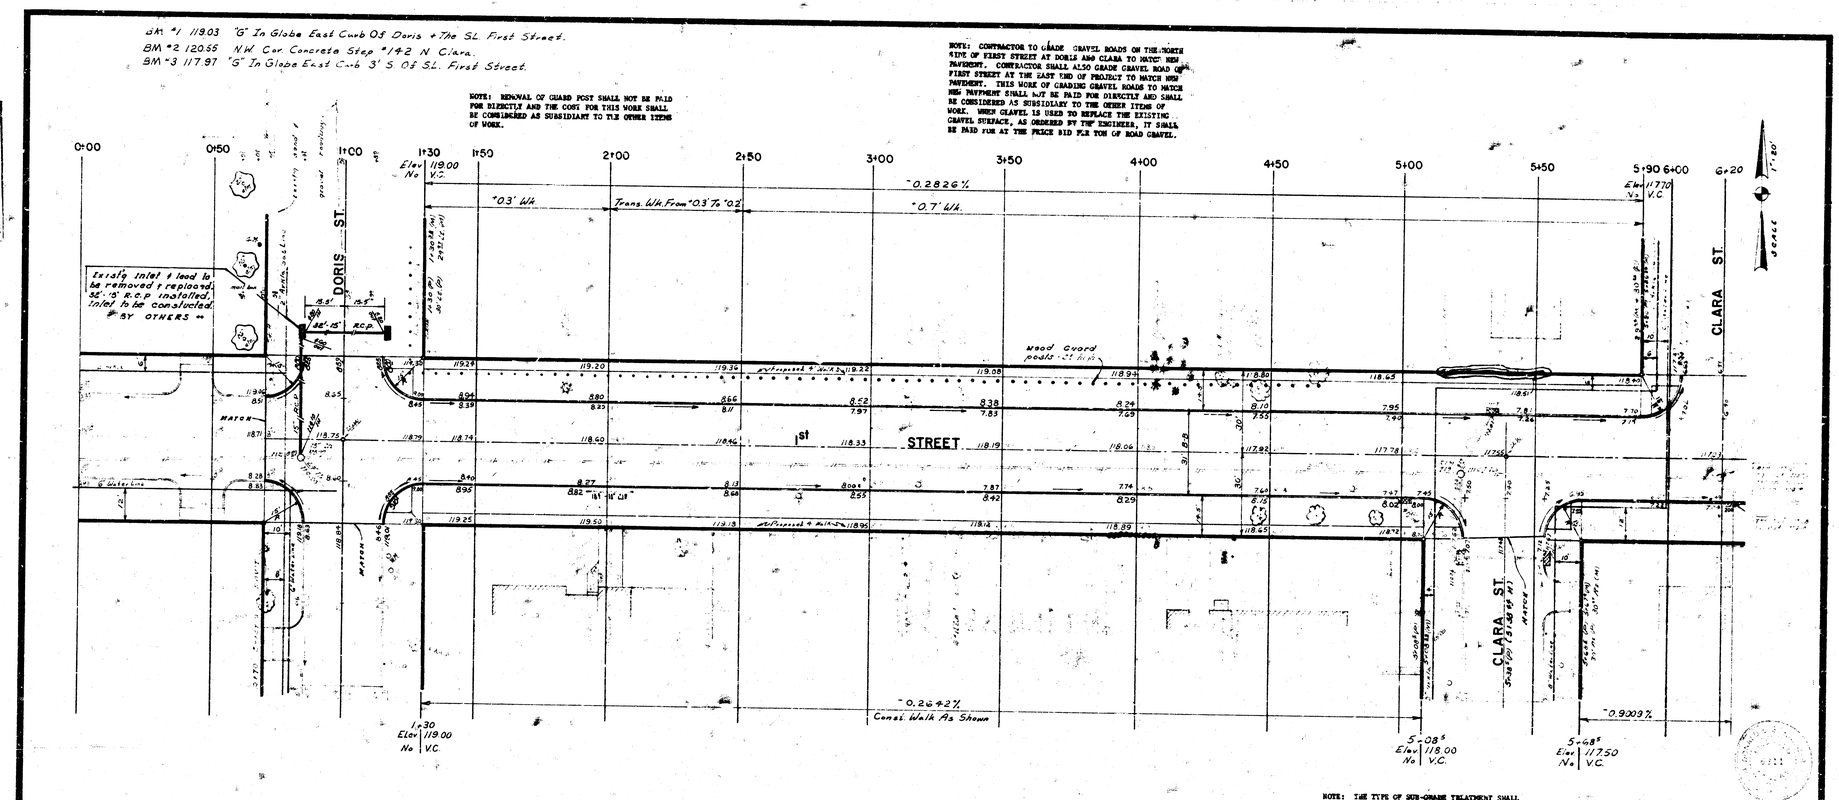


Property Earthwork		
Excavation	1877.5	Yd³
+10%	187.8	Yd³
Total	2,065.3	Yd³

City Earthwork		
Excavation	341.9	Yd³
+10%	34.2	Yd³
Total	376.1	Yd³

NOTE: THE TYPE OF SUB-GRADE TREATMENT SHALL BE DETERMINED BY THE FIELD ENGINEER. SUB-GRADE TREATMENT MAY CONSIST OF LIME TREATMENT, CEMENT TREATMENT, SUB-GRADE MOISTURIZING, OR ANY COMBINATION OF THESE.

NOTE: CONTRACTOR TO GRADE PARKINGS, CLEAR THE RIGHT-OF-WAY, AND CONSTRUCT COMPACTED FILL FOR FUTURE SIDEWALK. SIDEWALK SHALL BE CONSTRUCTED BY OTHERS.

1st STREET
FROM W.L. DORIS STREET
TO E.L. BEBE STREET
30' CONC. PAVM'T. WITH CURB
CITY OF WICHITA, KANSAS
R.W. LINN CITY ENGINEER
DATE: Feb 1971
SHEET: 1 OF 4
PROJECT NO. DAKS 572053

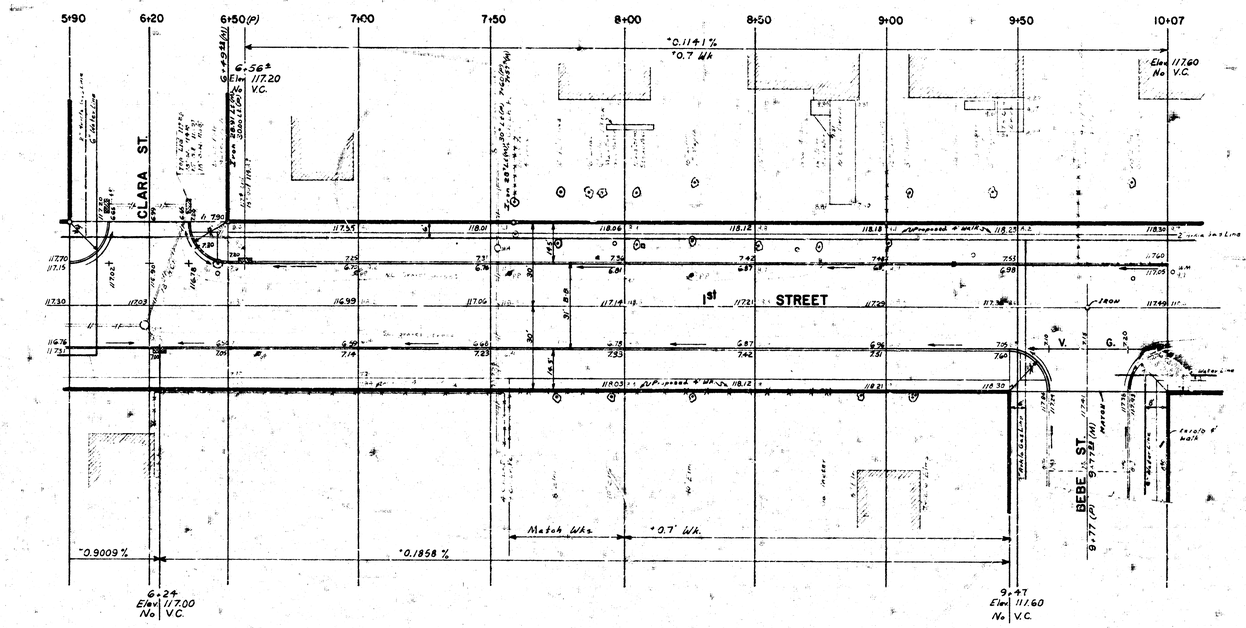

1st STREET
FROM W.L. DORIS STREET
TO E.L. BEBE STREET

SHEET: 2 OF 4
PROJECT NO. DAKS 572053