


11th st. North
EL Doris to WL Clara st

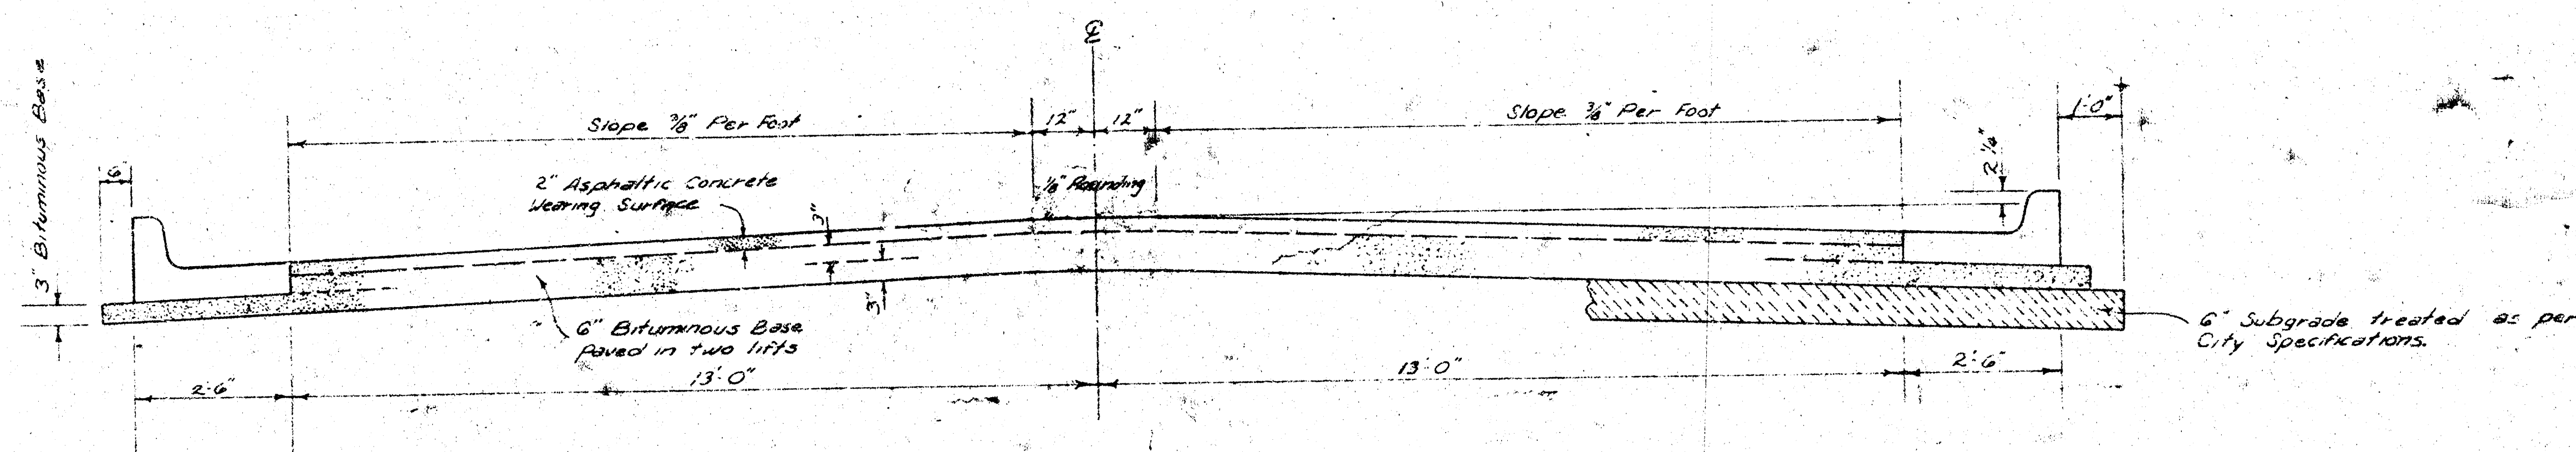


TYPICAL SECTION

3' ASPHALTIC CONCRETE PAVEMENT WITH BITUMINOUS BASE

A TACK COAT OF EMULSIFIED ASPHALT (SS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE OF 0.05 GALLONS PER SQ. YD. BETWEEN LIFTS OF ASPHALTIC MATERIALS WHEN ORDERED BY THE ENGINEER. TACK COAT WILL NOT BE PAID FOR DIRECTLY AND SHALL BE CONSIDERED AS SUBSIDIARY TO PRICE BID FOR ASPHALTIC PAVEMENT. BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC CONTROLS FOR CROWN AND GRADE. CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF 1' WITH JOINTS IN PRECEDING LIFTS AND SUCH THAT A JOINT WILL BE CONSTRUCTED ON THE PAVEMENT CENTERLINE IN THE TOP LIFT.


DETAIL OF TRANSVERSE CONSTRUCTION JOINTS

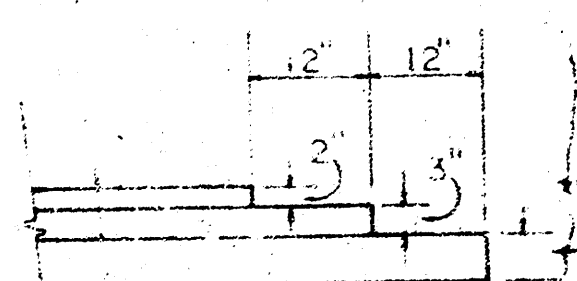


TRANSVERSE CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN FLEXIBLE BASE PAVEMENTS AT LOCATIONS WHERE PAVEMENT TEMPORARILY ENDS TO FACILITATE FUTURE PAVEMENT CONSTRUCTION AS SHOWN BY DETAIL. THE COST OF CONSTRUCTING THE TRANSVERSE CONSTRUCTION JOINTS SHALL NOT BE MEASURED OR PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE BID PRICE FOR SQUARE YARDS OF ASPHALTIC CONCRETE PAVEMENT.

The A.C. pavement between the Comb. Curb & Gutter shall be paid as 3' A.C. Pavement (6 Bituminous Base). The Bituminous Base under the Comb. Curb & gutter shall be paid as 3' Bituminous Base.

COMBINED CURB & GUTTER

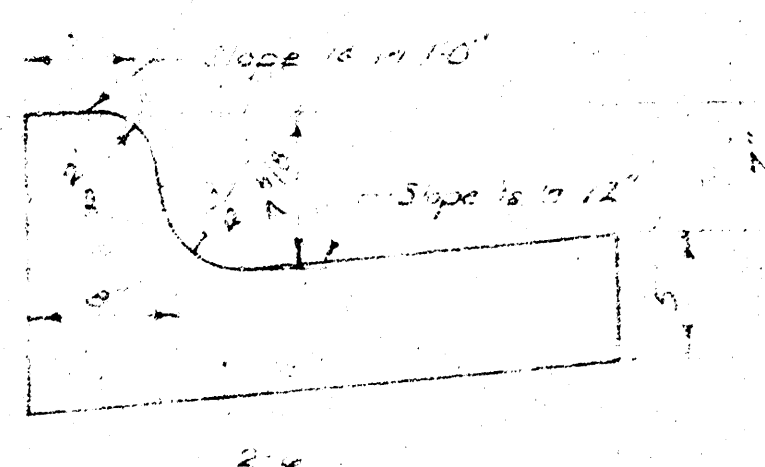

ROLL TYPE CURB & GUTTER

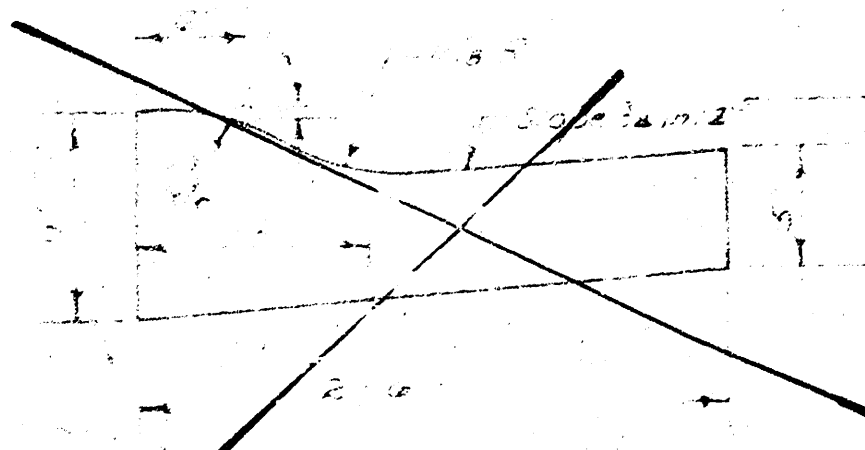

CITY OF WICHITA, KANSAS

DEPARTMENT OF PUBLIC WORKS — ENGINEERING


D. Sellers

Acting CITY ENGINEER

DATE:

PROJ. NO. 472-76-245-80918-000-000-001

BM 12801 RR spike SE side P. Pole NW cor. 11th and Clara.
 BM 126293 City Sid., 34'E and 42'S of $\bar{C}$ both Hoover and 9th st N.
 $\bar{C}$ is $\bar{C}$ of 11th st. N.

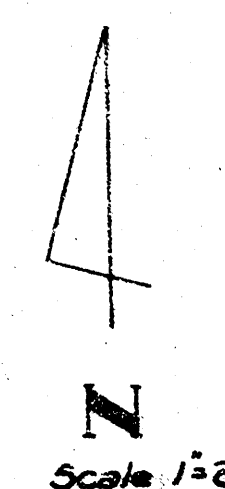


"Note"
 Contractor To Regrade Intersection To Match New Constr.
 Cost Of Regrading Both Intersections Shall Be Incidental To Project.

SUBGRADE
 TYPE OF SUBGRADE TREATMENT SHALL BE DETERMINED BY FIELD ENGINEER. SUBGRADE TREATMENT MAY CONSIST OF LIME TREATMENT, CEMENT TREATMENT, SUBGRADE MODIFICATION, OR ANY COMBINATION OF THESE.

General Notes

- 1) Field Engineer to make ties to all Irons. Irons disturbed or destroyed are to be replaced.
- 2) Contractor to Contact Property Owner in regard to fence removal and replacement.
- 3) No More Than 5'-20' DR.'S Or Equivalent To Be Constr. On This Project.

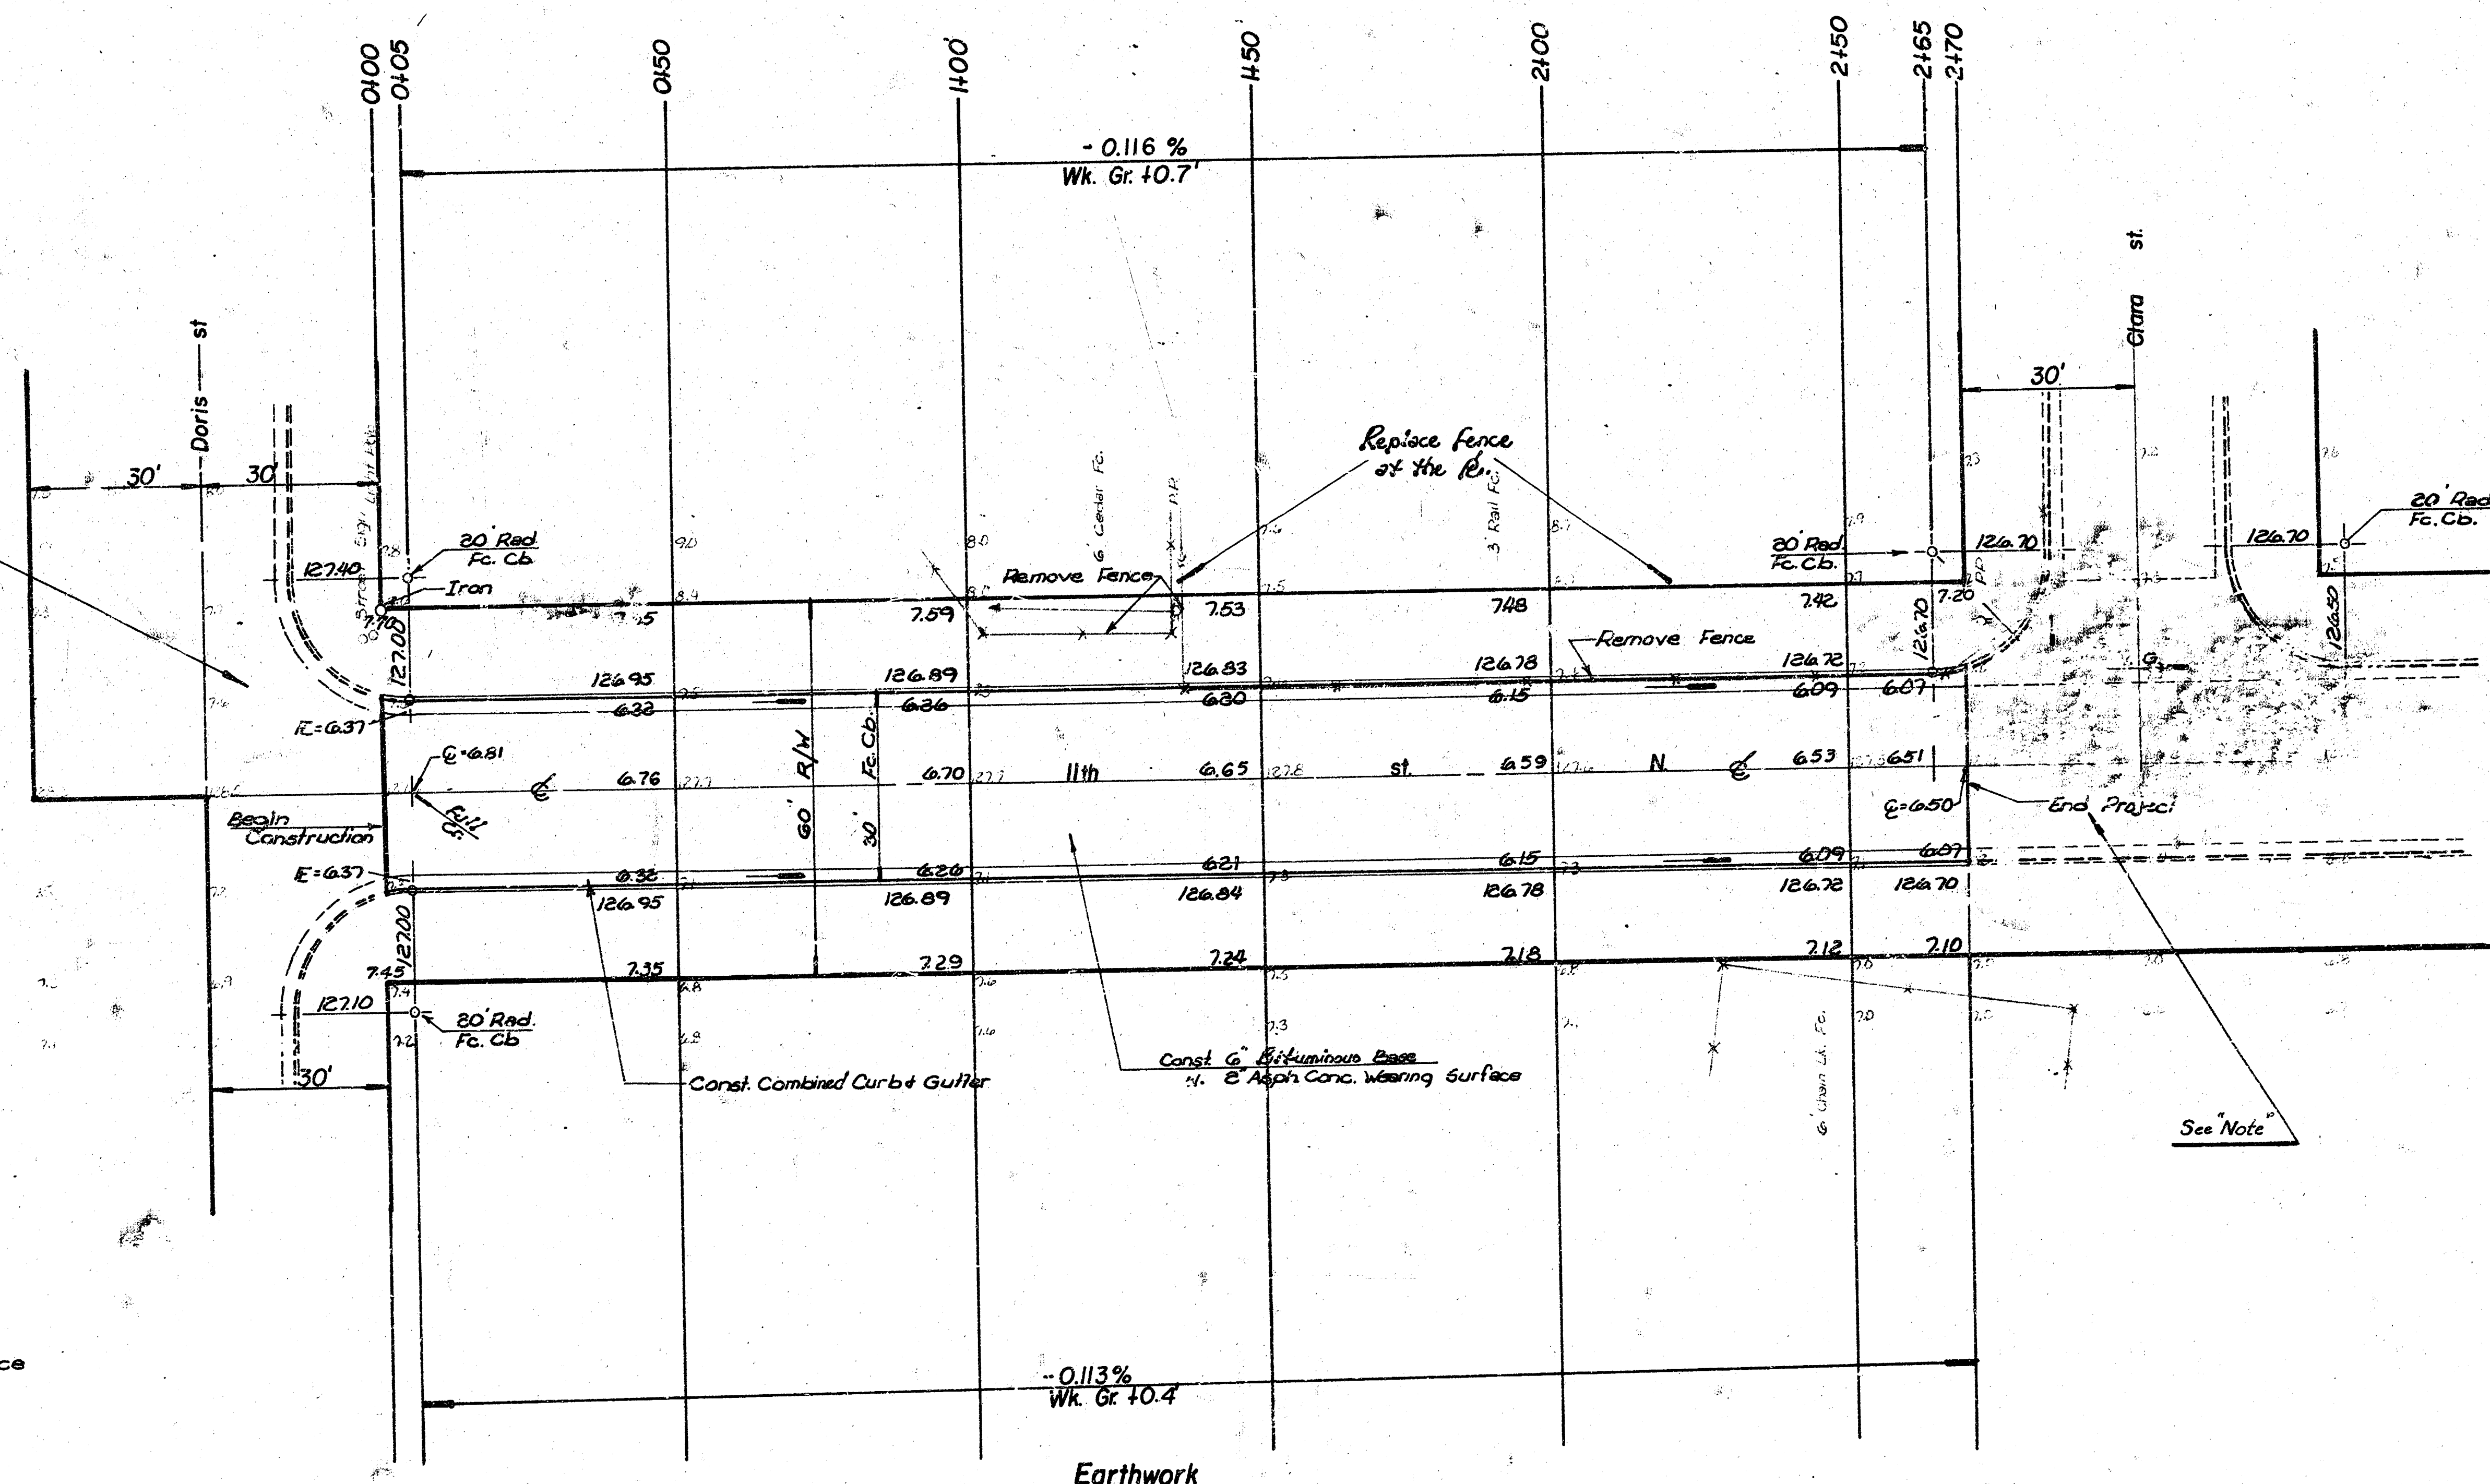

	Excavation	Compacted Fill
Property	687.4 cy	
+10%	68.7 cy	
Total	756.1 cy	0.0 cy

Manipulation: 990.0 sy

11th st North
 EL Doris St. to WL Clara St.
 City of Wichita — Kansas
 D. Sellers. — Acting City Engineer
 Proj. no. 472-76-245-80918-000-000-001

Date _____