


B. M. 141.65 CITY STANDARD S. E. CORNER GROVE & 25th.  
 B. M. 155.47 R. R. SPIKE E. SIDE LARGE ELM S. W. CORNER GROVE & 27th.

A = 115'00" R = 220' T = 345.33' L = 441.57' LC = 371.09'

STA	CH	8' LT	4' RS	RECORDS	DEFLECTION
441.00				0'00"-00'	0'00"-00'
445.00	18.44'	20.61'	16.71'	2'25"-48"	2'25"-48"
447.50	25.00'	27.62'	22.38'	5'15"-19"	5'41"-07"
450.00		27.61'	22.39'	3'15"-20"	8'56"-27"
452.50		27.61'	22.39'	3'15"-19"	12'17"-46"
455.00		27.62'	22.38'	3'15"-20"	15'27"-06"
457.50		27.61'	22.39'	3'15"-19"	18'42"-25"
460.00		27.61'	22.39'	3'15"-20"	21'57"-45"
462.50		27.62'	22.38'	3'15"-20"	25'13"-05"
465.00		27.61'	22.39'	3'15"-19"	28'38"-24"
467.50		27.61'	22.39'	3'15"-20"	31'43"-44"
470.00		27.62'	22.38'	3'15"-19"	34'39"-05"
472.50		27.61'	22.39'	3'15"-20"	37'44"-25"
475.00		27.61'	22.39'	3'15"-20"	40'29"-45"
477.50		27.62'	22.38'	3'15"-19"	44'45"-05"
480.00		27.61'	22.39'	3'15"-20"	48'00"-25"
482.50	25.00'	27.61'	22.39'	3'15"-19"	51'15"-41"
485.00	30.65'	33.63'	27.43'	3'59"-19"	55'15"-00"
487.50	17.28'	19.09'	13.47'	2'15"-00"	57'30"-00"

DEFLECTION IN MIN. PER FOOT = 7.81303078"/FF.  
 \* CURVE DATA BASED ON 220' RADIUS TO PROPOSED PAVEMENT ON GROVE.

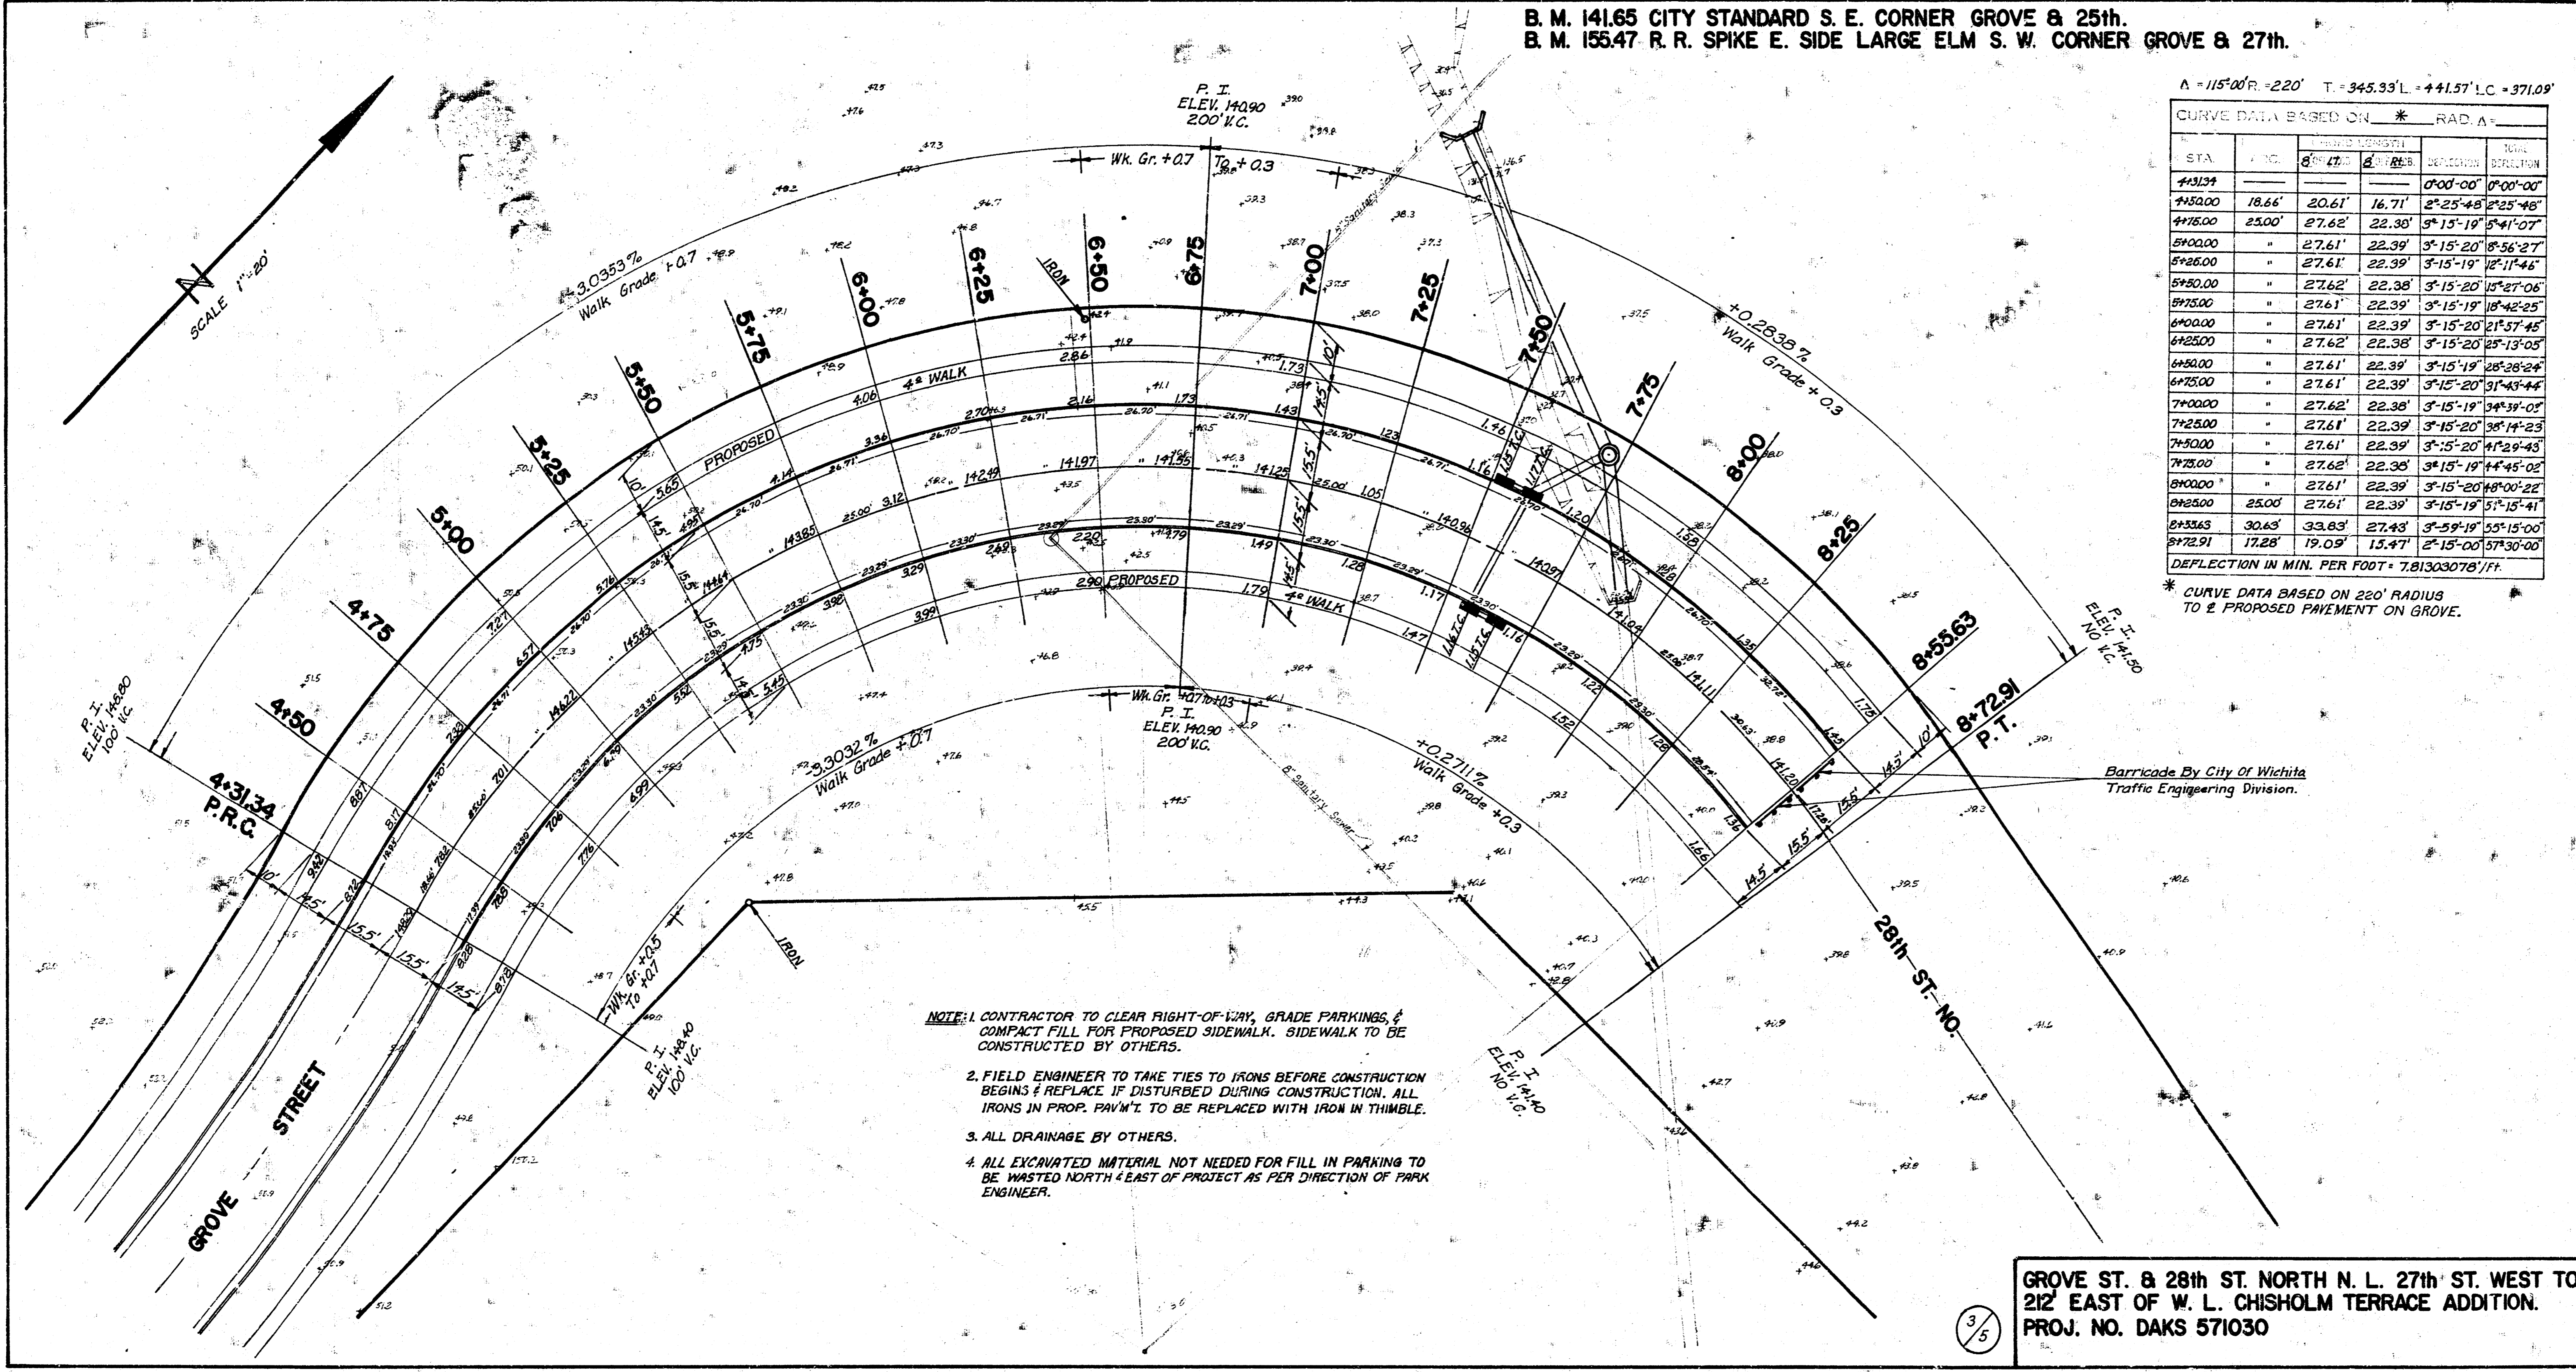

- NOTE: 1. CONTRACTOR TO CLEAR RIGHT-OF-WAY, GRADE PARKINGS & COMPACT FILL FOR PROPOSED SIDEWALK. SIDEWALK TO BE CONSTRUCTED BY OTHERS.
2. FIELD ENGINEER TO TAKE TIES TO IRONS BEFORE CONSTRUCTION BEGINS & REPLACE IF DISTURBED DURING CONSTRUCTION. ALL IRONS IN PROP. PAV'T. TO BE REPLACED WITH IRON IN THIMBLE.
3. ALL DRAINAGE BY OTHERS.
4. ALL EXCAVATED MATERIAL NOT NEEDED FOR FILL IN PARKING TO BE WASTED NORTH-EAST OF PROJECT AS PER DIRECTION OF PARK ENGINEER.

GROVE ST. & 28th ST. NORTH N. L. 27th ST. WEST TO 212' EAST OF W. L. CHISHOLM TERRACE ADDITION.  
 PROJ. NO. DAKS 571030

3/5