

FHWA REGION NO.	STATE	PROJECT NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
7	KANSAS	87 N-0303-01	2003	4	143

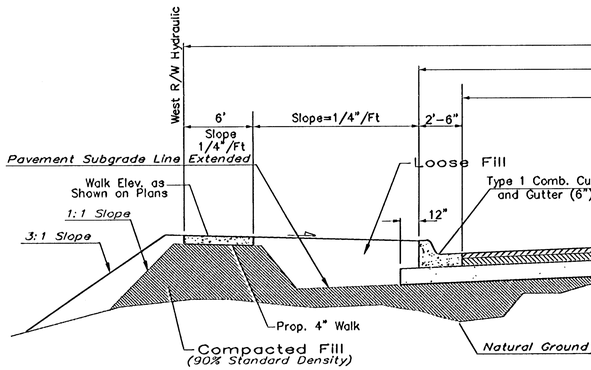


FILL AREAS (TYP)

TYPICAL SECTION

STA. 49+34.00 to STA. 50+00.00
STA. 60+40.00 to STA. 63+59.33
STA. 73+39.75 to STA. 98+30.00
STA. 102+64.78 to STA. 112+45.00

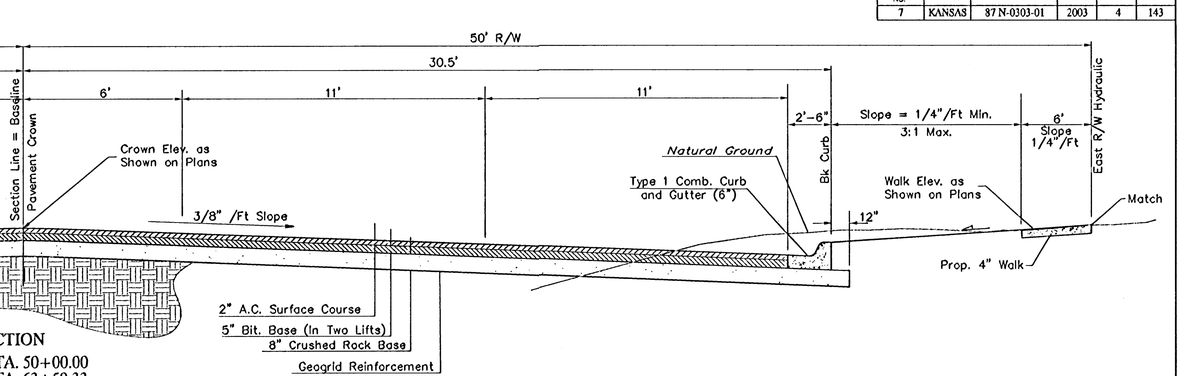


CUT AREAS (TYP)

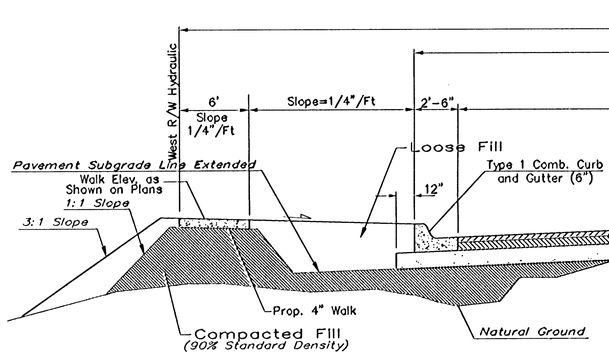


FILL AREAS (TYP)

TYPICAL SECTION

STA. 53+50.00 to STA. 58+80.00
STA. 65+19.33 to STA. 71+80.00

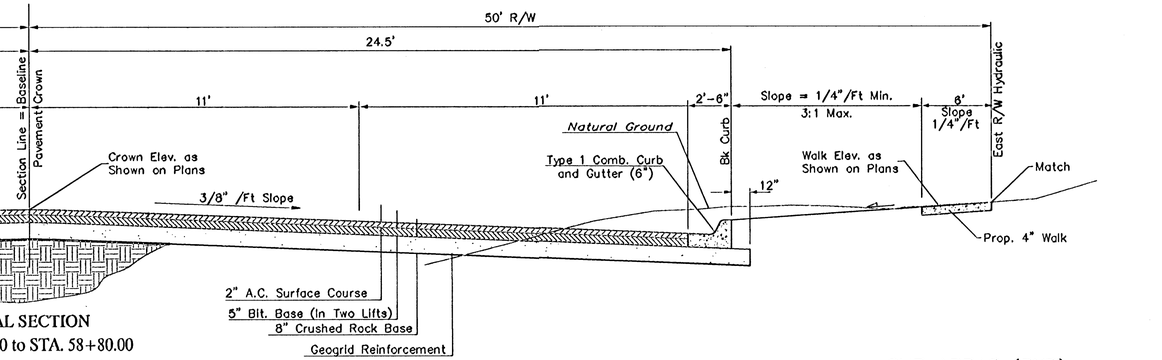


CUT AREAS (TYP)

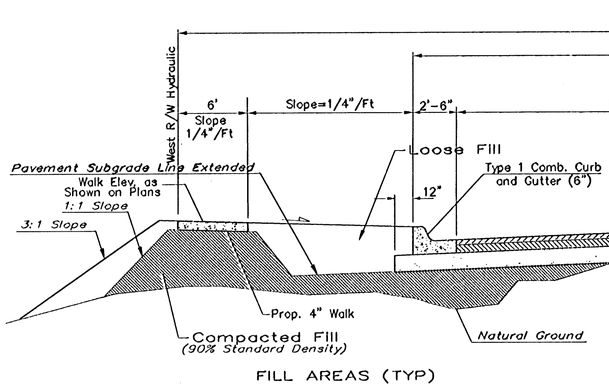

FILL AREAS (TYP)

TYPICAL SECTION

STA. 50+00.00 to STA. 53+50.00

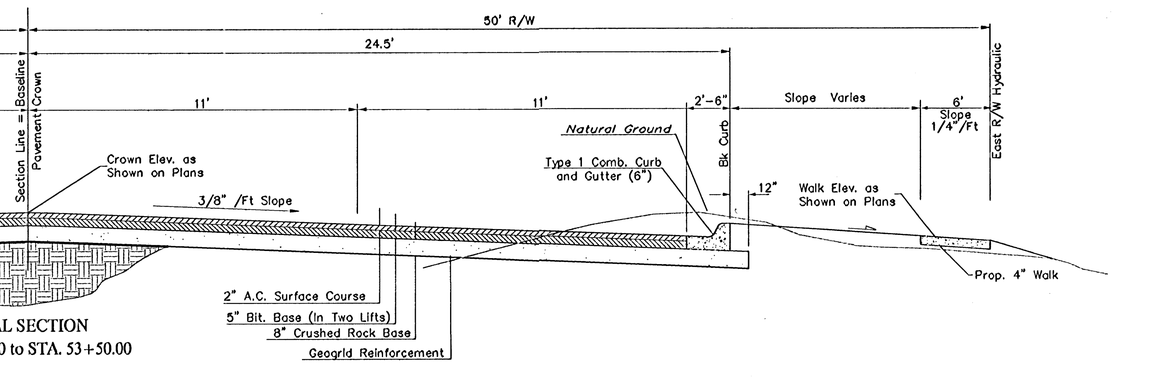

CUT AREAS (TYP)

GENERAL NOTES:

1. The Asphaltic Concrete Pavement Between the Combined Curb and Gutter Shall be Paid for as Square Yards of 7" Asphaltic Concrete (5" Bituminous Base).
2. A Tack Coat of Emulsified Asphalt (SC-1H or CSS-1H) Shall be Applied at an Approximate Rate of 0.05 Gallons per Square Yard Between Each Lift of Asphaltic Material.
3. Bituminous Base and Asphaltic Concrete Wearing Surface Shall be Placed With a Laydown Machine Having Automatic Controls for Line and Grade.
4. Construction Joints in Each Lift Shall be Staggered a Minimum Distance of One (1) Foot From Joints in Preceding Lifts and Placed So That a Joint Will be Constructed on the Centerline of the Top Lift.

PROJECT NUMBER			SHEET NAME	ENGINEERING DIRECTORY	
472-83902			Typsec01	F:\Hydraulic phs2\details	
DESIGN	DRAWN	APPROVED	DATE	SCALE	BAUGHMAN NO
JFB	KWR	JFB	Aug 03	None	99-09-E450

CAPITAL IMPROVEMENT PROJECT
HYDRAULIC AVENUE
TYPICAL PAVEMENT SECTIONS
HYDRAULIC AVENUE PAVING - 87 TH STREET SOUTH TO 47TH STREET SOUTH

BAUGHMAN COMPANY, P.A.
ENGINEERING, SURVEYING, & PLANNING
316-262-7271 • 315 ELLIS • WICHITA, KANSAS 67211

SHEET 4 OF 143