

FHWA REGION NO.	STATE	PROJECT NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
7	KANSAS	87 N-0303-01	2003	5	143

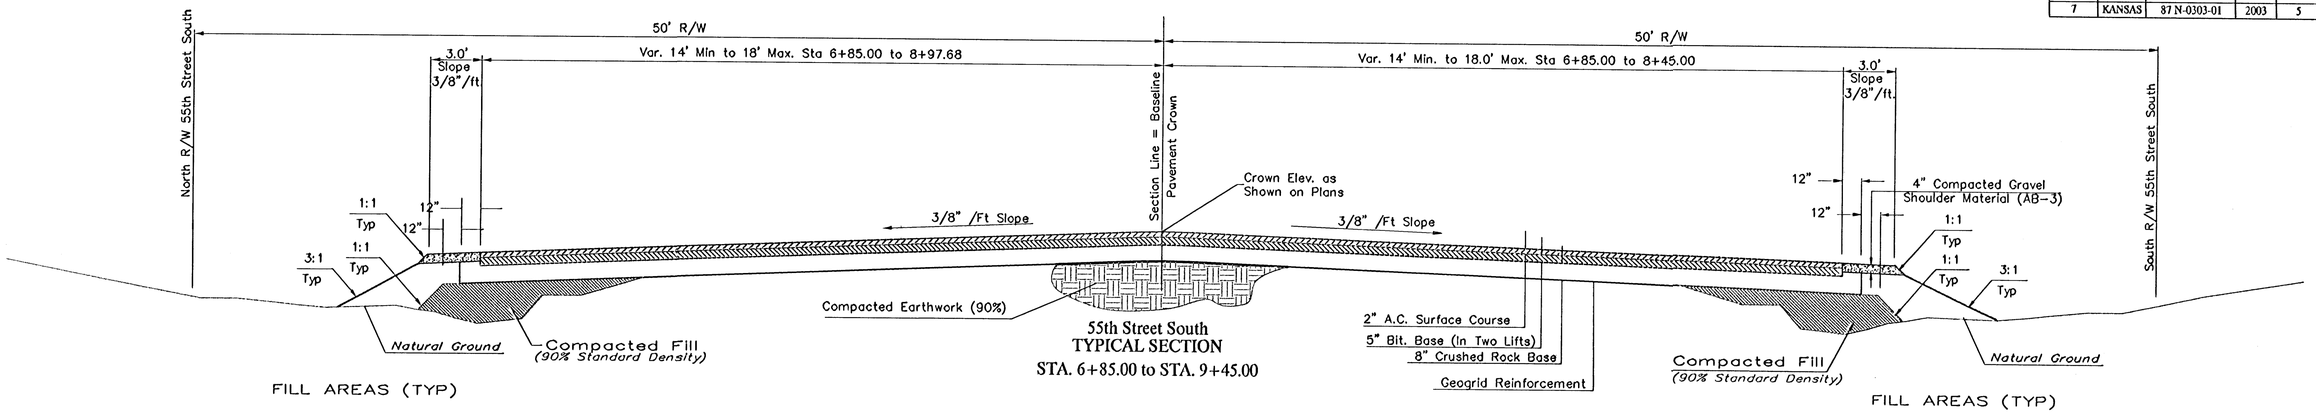

FILL AREAS (TYP)


55th Street South
TYPICAL SECTION
STA. 6+85.00 to STA. 9+45.00

FILL AREAS (TYP)

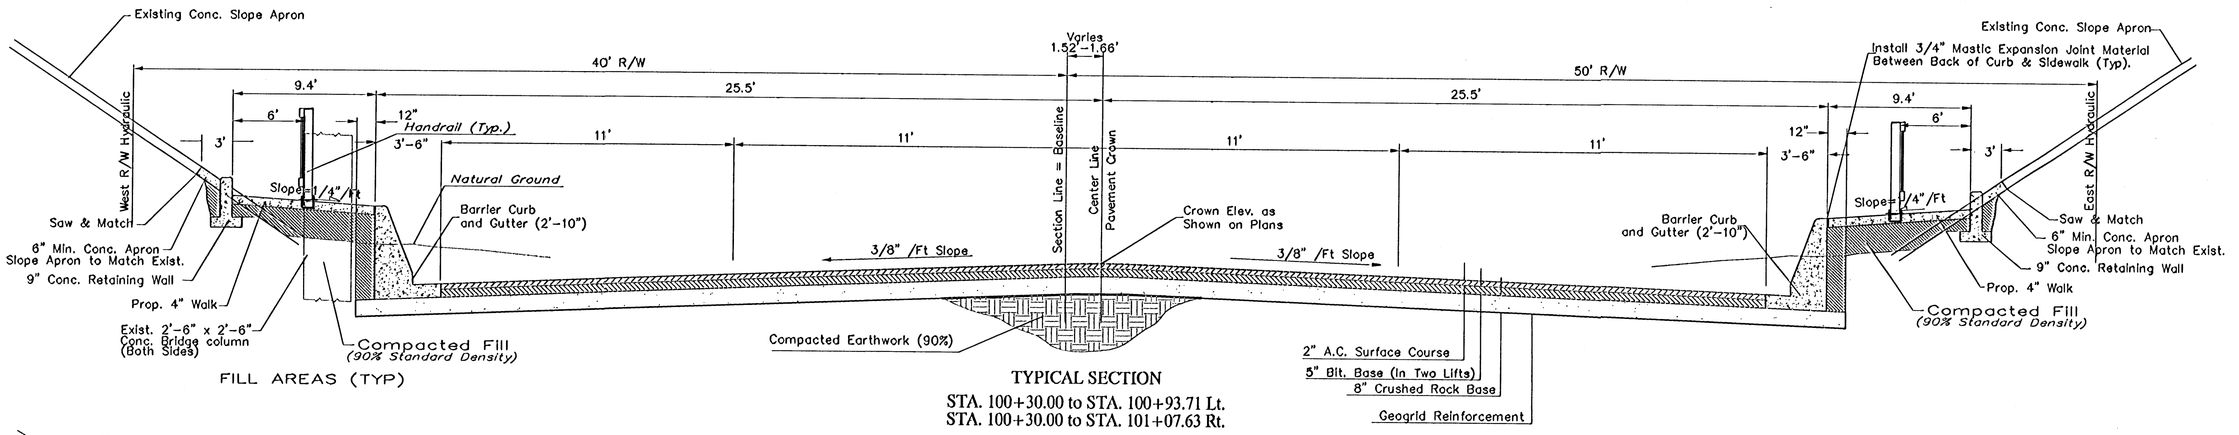

FILL AREAS (TYP)

TYPICAL SECTION
STA. 100+30.00 to STA. 100+93.71 Lt.
STA. 100+30.00 to STA. 101+07.63 Rt.

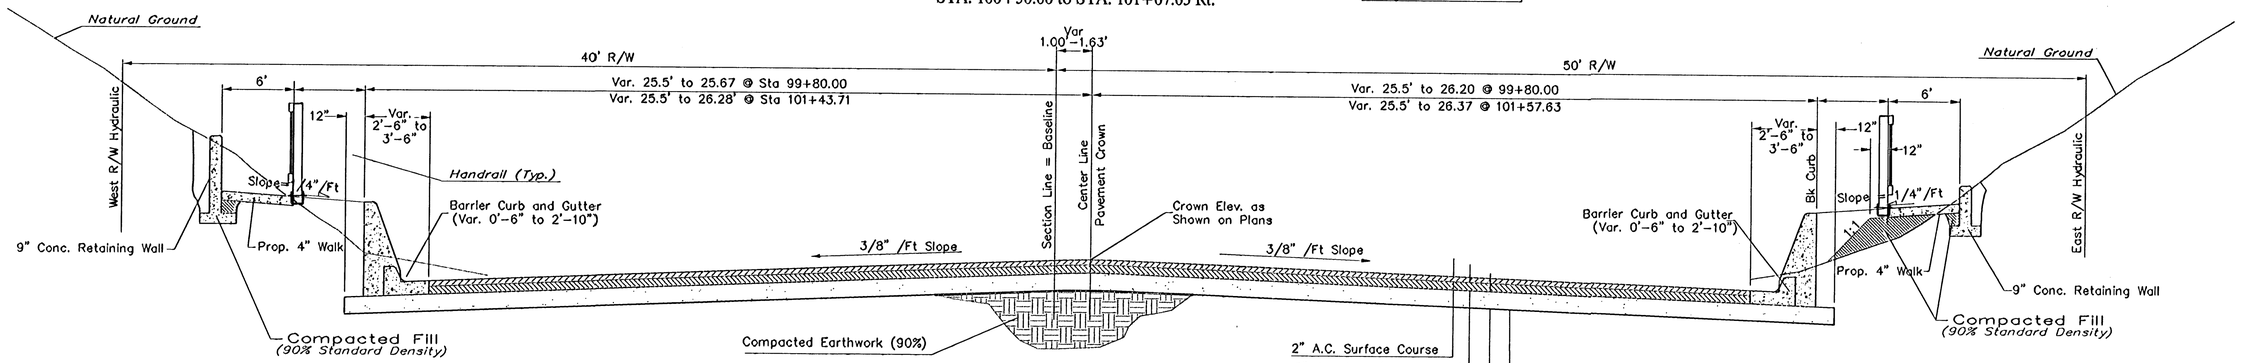

FILL AREAS (TYP)

TYPICAL SECTION
STA. 99+80.00 to STA. 100+30.00 Lt.
STA. 99+80.00 to STA. 100+30.00 Rt.
STA. 100+93.71 to STA. 101+43.71 Lt.
STA. 101+07.63 to STA. 101+57.63 Rt.

GENERAL NOTES:

1. The Asphaltic Concrete Pavement Between the Combined Curb and Gutter Shall be Paid for as Square Yards of 7" Asphaltic Concrete (5" Bituminous Base).
2. A Tack Coat of Emulsified Asphalt (SC-1H or CSS-1H) Shall be Applied at an Approximate Rate of 0.05 Gallons per Square Yard Between Each Lift of Asphaltic Material.
3. Bituminous Base and Asphaltic Concrete Wearing Surfae Shall be Placed With a Laydown Machine Having Automatic Controls for Line and Grade.
4. Construction Joints in Each Lift Shall be Staggered a Minimum Distance of One (1) Foot From Joints in Preceding Lifts and Placed So That a Joint Will be Constructed on the Centerline of the Top Lift.

PROJECT NUMBER			SHEET NAME	ENGINEERING DIRECTORY	
472-83902			Typsec02	P:\\Eng\Hydraulic\details	
DESIGN	DRAWN	APPROVED	DATE	SCALE	BAUGHMAN NO
JFB	KWR	JFB	Aug 03	None	99-09-B450

CAPITAL IMPROVEMENT PROJECT
HYDRAULIC AVENUE @ KTA & 55 TH STREET SOUTH
TYPICAL PAVEMENT SECTIONS
HYDRAULIC AVENUE PAVING - SOUTH OF 57 TH STREET SOUTH TO 47TH STREET SOUTH

BAUGHMAN COMPANY, P.A.
ENGINEERING, SURVEYING, & PLANNING
316-262-7271 • 315 ELLIS • WICHITA, KANSAS 67211

SHEET 5 OF 143