


NOTE: Pond #5 shall be constructed prior to breaching the existing channel. When connections to the existing channel are made, the work shall be done with a backhoe/tracker excavator. The maximum disturbance area at each tie-in shall be 150 linear feet along the channel bank.

Existing rubble from channel bottom to top bank. Remove rubble as necessary to complete pond construction and replace with Heavy Stone Rip-rap. Cost of removal and replacement to be incidental to "Site Clearing & Restoration"

Pond #5 Data:
 Static WS elev = 1337.0
 Groundwater controlled

10' KG²
 (FILM 3)
 114.0'

Construct concrete weir and install 571.9 S.Y. Heavy Stone Rip-rap. See detail, this sheet.

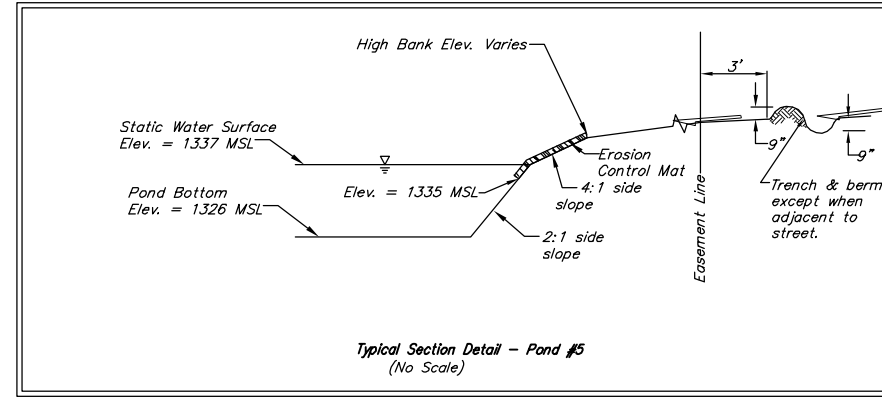


HILLSIDE AVE.

45TH ST. NORTH

Ex. 15" CMP

BL Sta 0+00 = Intersection of Hillside and 45th St. N.

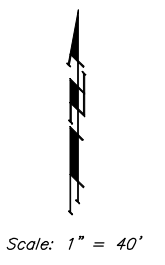

		FALCON FALLS 2ND/3RD/COMM. ADD. POND #5 STORM WATER DRAIN #275	
<small>Baughman Company, P.A. 315 11th St. W. Minn. 55 0711 P 316262-7271 F 316262-0149 ENGINEERING SURVEYING PLANNING LANDSCAPE ARCHITECTURE</small>			
PROJECT NUMBER 468-84067	DESIGN AEG	DRAWN TMS	DATE 01/06
REVISIONS:	SCALE Noted	SHEET 10 OF 39	
<small>Falcon Falls 2nd/Pond5A</small>		<small>05-10-E377</small>	