

EROSION CONTROL MEASURE	UNITS	QUANTITY
INSTALL DROP INLET BARRIER	EA.	7
INSTALL CURB INLET BARRIER	EA.	1
MAINT. DROP INLET BARRIER	EA.	2
MAINT. CURB INLET BARRIER	EA.	4
INSTALL STRAW BALE BARRIER	EA.	2
MAINT. EROSION CONTROL BERM	L.F.	700
INSTALL SILT FENCE	L.F.	708
MAINT. CONSTRUCTION ENTRANCE	EA.	1

QUANTITIES ARE FOR INFORMATION ONLY!
CONTRACTOR SHALL VERIFY QUANTITIES PER FINAL BID QUANTITY SHEET.



EARTHWORK TOTALS*		
	CY EXC	CY FILL
MASS GRADING	26,992	12,121

Excess Excavation to be placed as shown on the Lot Fill Plan.

*For Information Only

Mass Grading and Erosion Control Plan Legend

- Proposed Storm Sewer
- Existing Sanitary Sewer
- Proposed Grade
- Existing Grade
- Silt Fence
- Erosion Control Berm
- Straw Bale Ditch Check
- Drop Inlet Sed. Barrier
- Curb Inlet Sed. Barrier
- Remove Trees
- Area to be graded

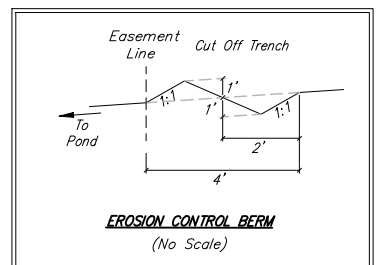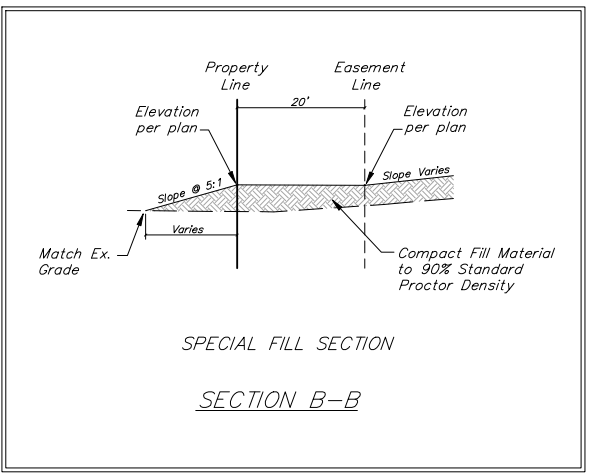

Baughman Tyler's Landing 3rd Addition - Phase 2
MASS GRADING PLAN
STORM WATER DRAIN #278

Baughman Company, P.A. 315 8th St. Woburn, MA 02111 P 316-262-7771 F 316-262-0149
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

PROJECT NUMBER 468-64298	DESIGN RDM/ABO	DRAWN RDM
REVISIONS:	APPROVED ABO	DATE 02/07
	SCALE NOTED	SHEET

3 OF 29

Tyler's Landing 3rd Phase 2/SWS/Mass Grading.dwg