



	BY	DATE
REFERENCES NOTED		
REFERENCES CHECKED		

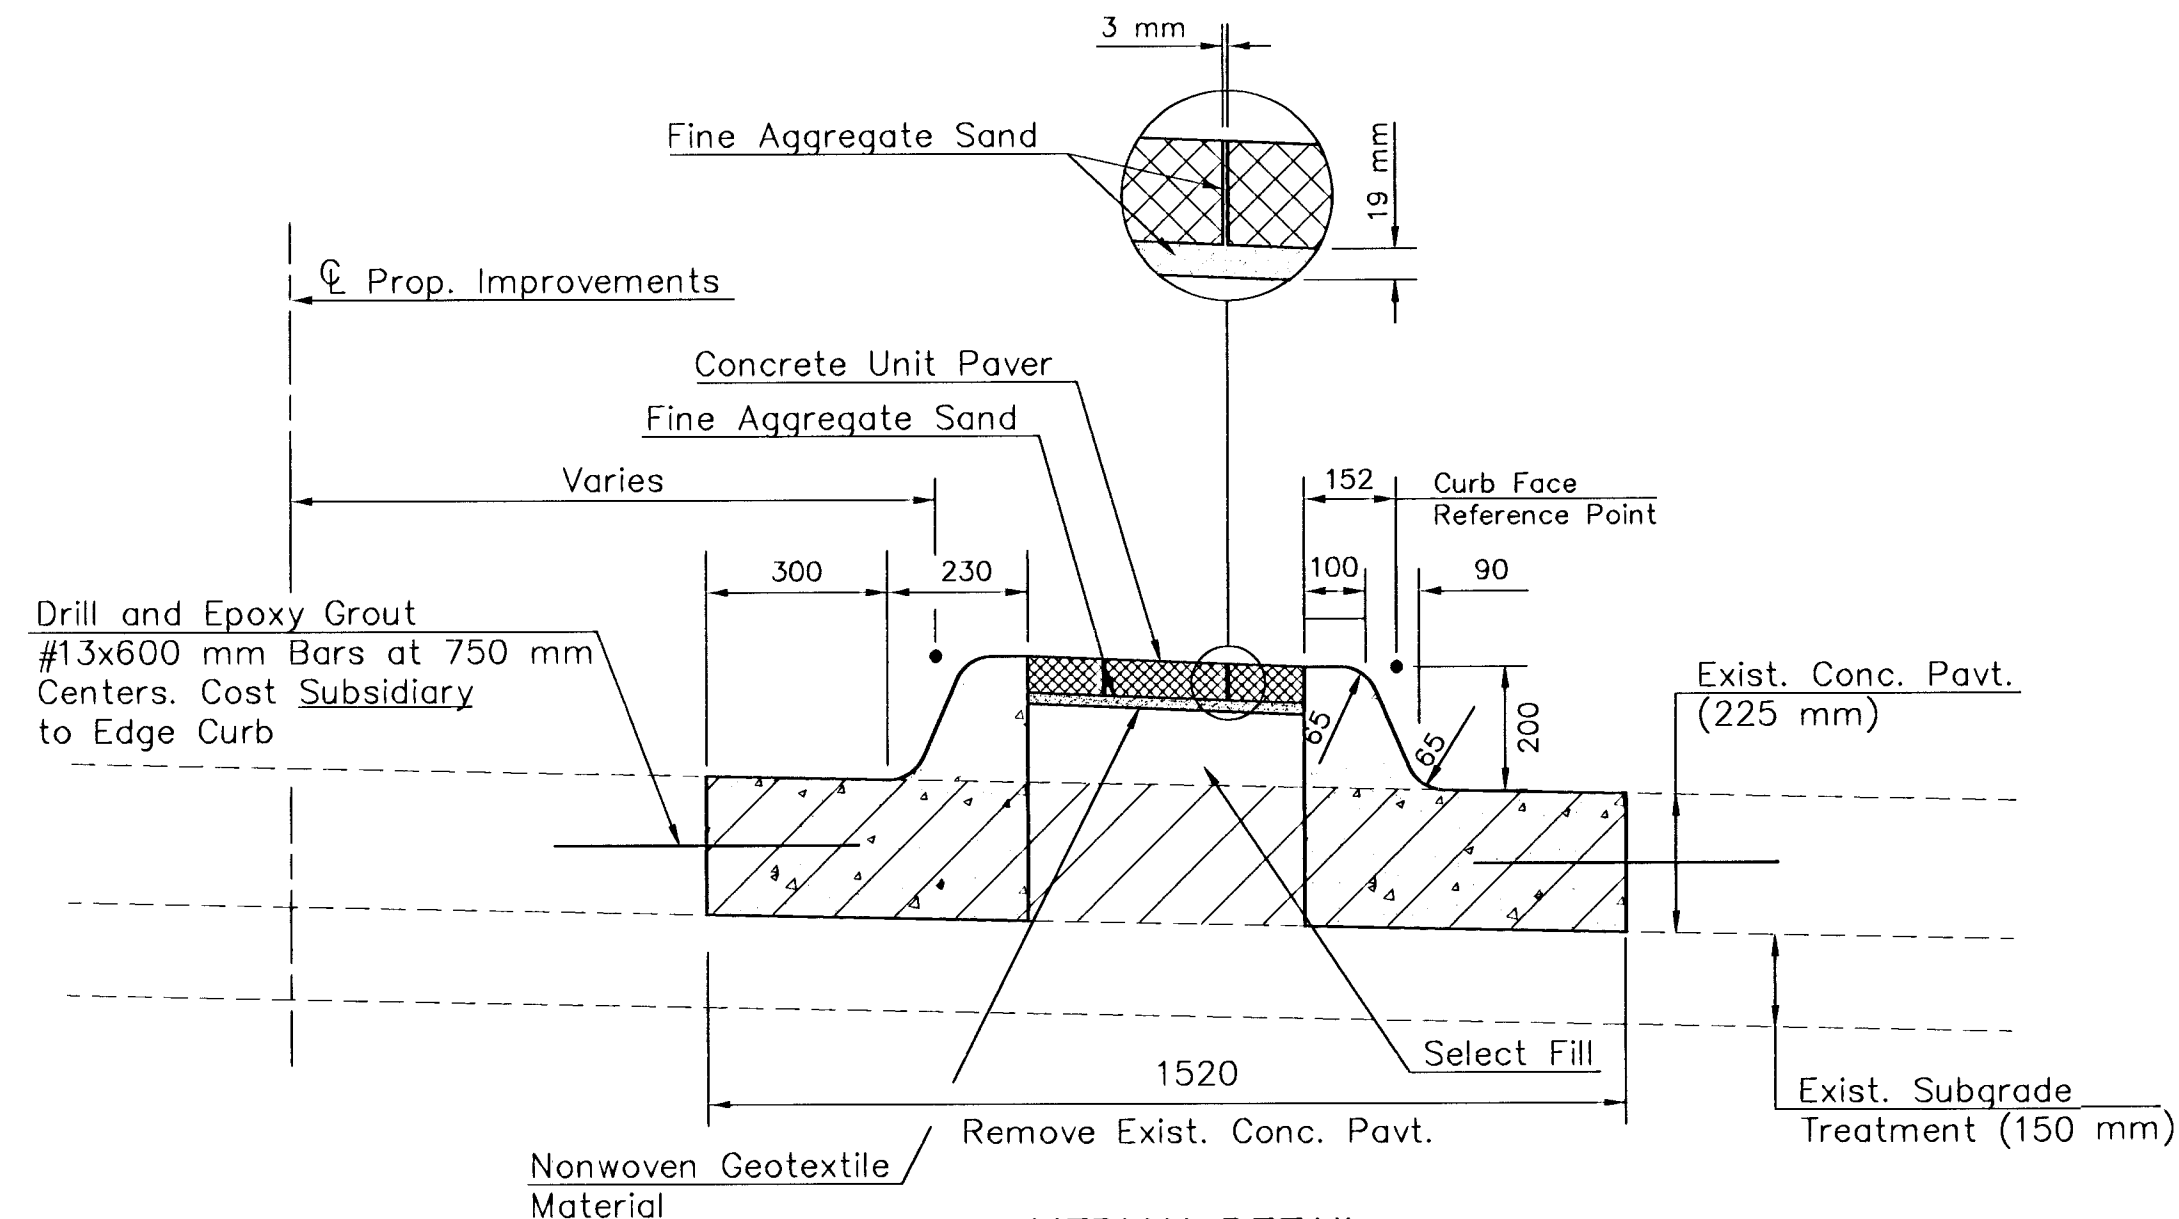


MEDIAN DETAIL

(ROCK RD. - STA. 4+971.80 TO STA. 4+980.77)
(ROCK RD. - STA. 5+016.28 TO STA. 5+100.98)

MATERIALS AND INSTALLATION OF UNIT PAVERS OR BRICK IN MEDIAN SHALL BE AS SHOWN ON CROSSWALK DETAILS, WITH THE FOLLOWING EXCEPTIONS: PAVES THICKNESS SHALL BE 60 mm MIN. GEOTEXTILE MATERIAL SHALL MEET THE REQUIREMENTS OF AASHTO M 288, CLASS 2 (CONTECH C-60NW OR APPROVED EQUAL). SELECT FILL MATERIAL SHALL CONSIST OF 80% CONCRETE SAND AND 20% SELECT SOIL, THOROUGHLY MIXED. THIS MATERIAL IS TO BE MECHANICALLY COMPACTED TO THE SATISFACTION OF THE ENGINEER.

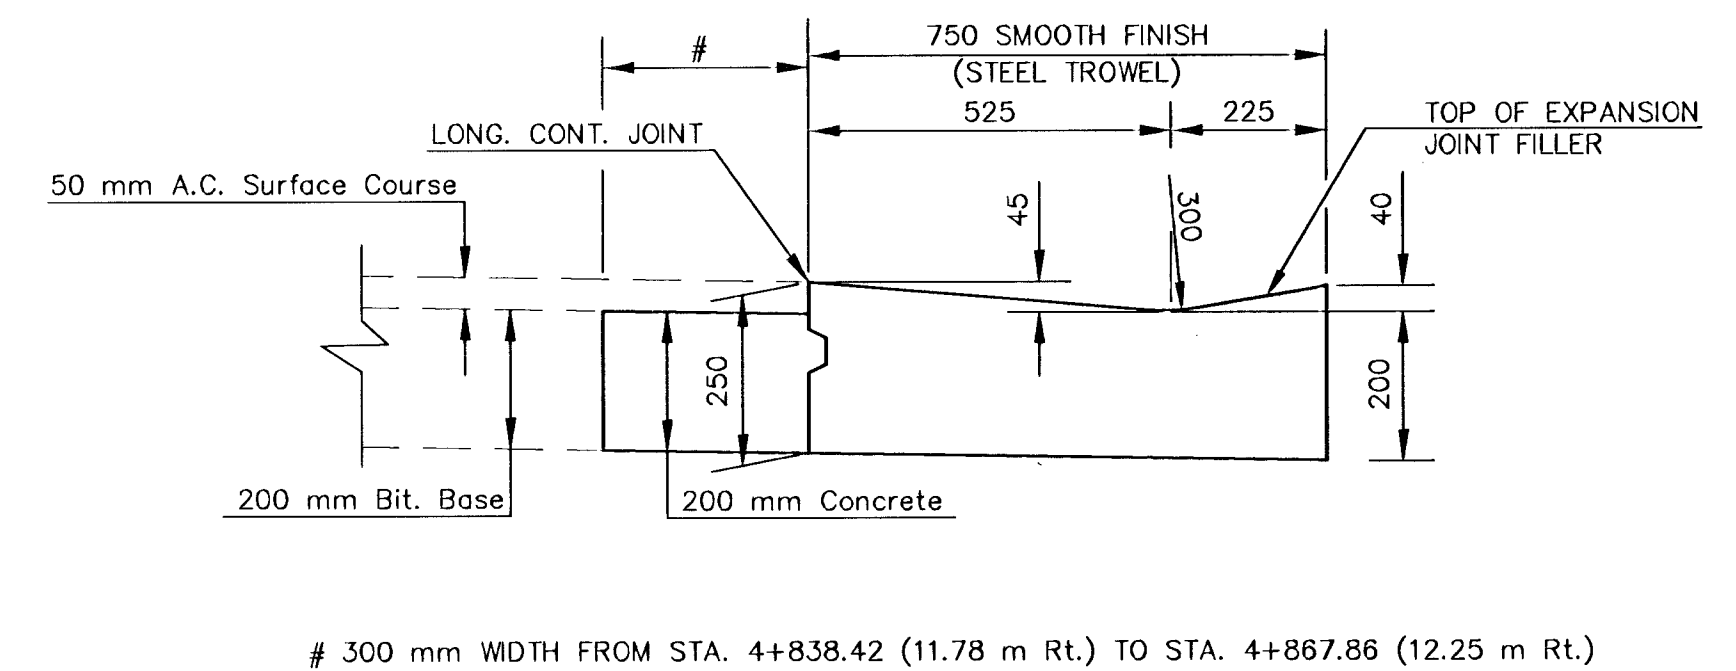

COMBINED CURB AND GUTTER – TYPE II

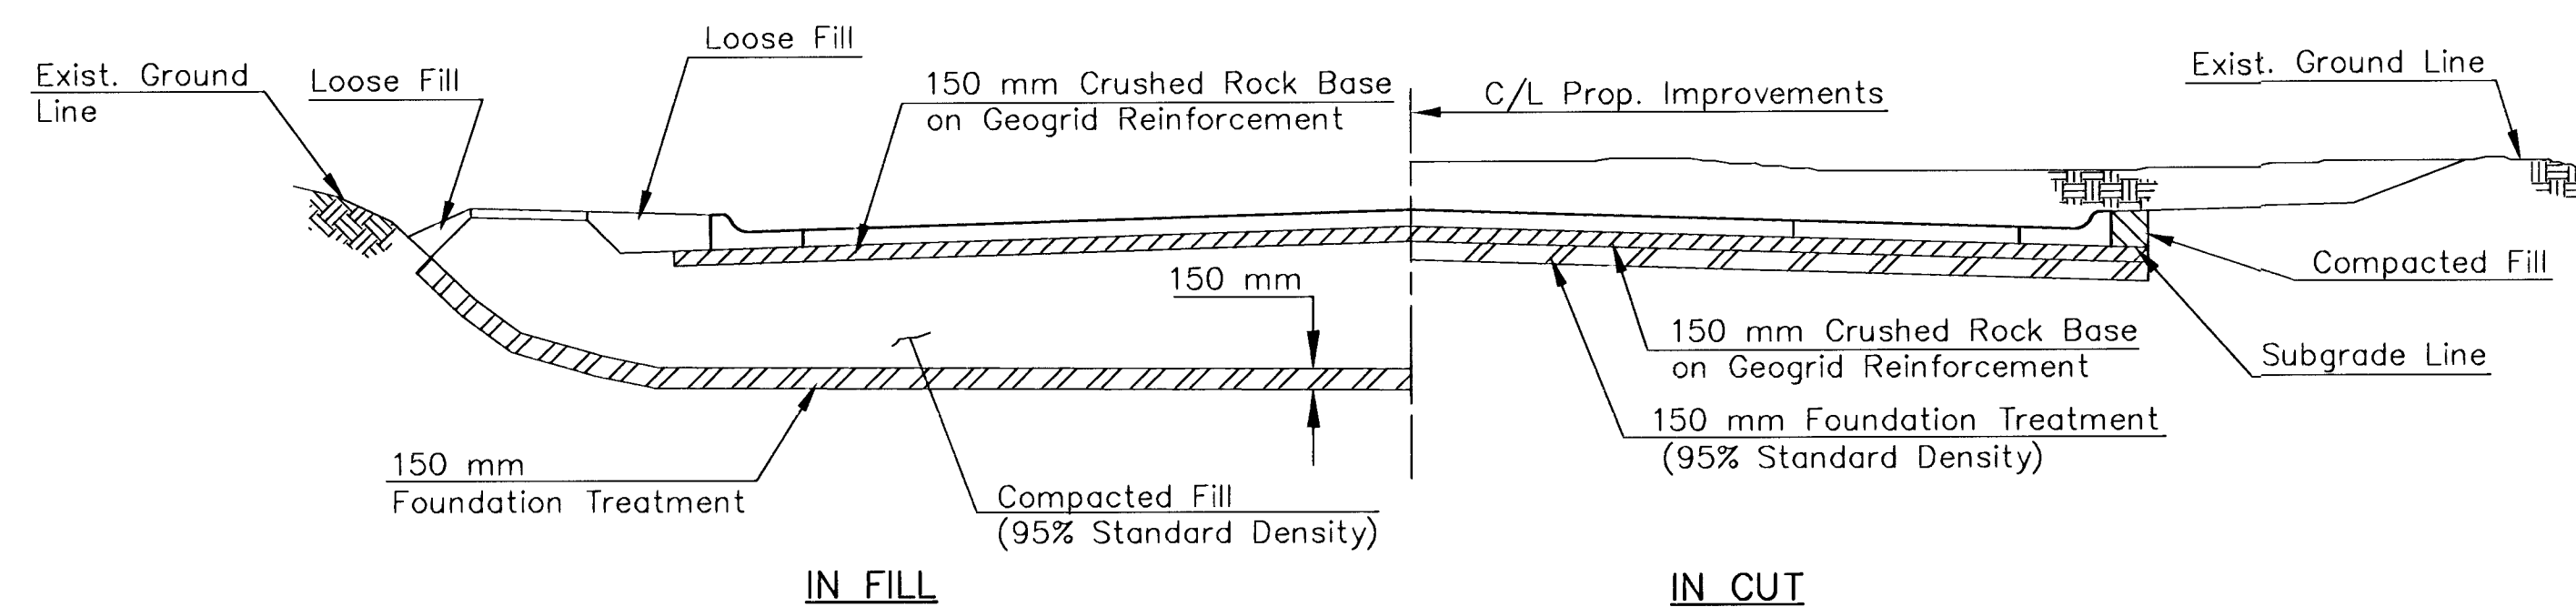

FOUNDATION TREATMENT AND COMPACTION OF EARTHWORK

KANSAS DEPARTMENT OF TRANSPORTATION			
CENTRAL & ROCK INTERSECTION			
TYPICAL SECTIONS			
PROJ. NO. 87N-0196-01		SEDGWICK CO.	
MKEC ENGINEERING CONSULTANTS, INC.			
WICHITA, KANSAS			
DESIGNED BY: DCH		CHECKED BY: DCH	
DRAWN BY: DAG		DATE: FEB. 2001	
		SHEET 6 OF 58	