FHWA REGION NO.	STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
7	KANSAS	87 ER-164(1)	1974	24	28

DAKB 574005

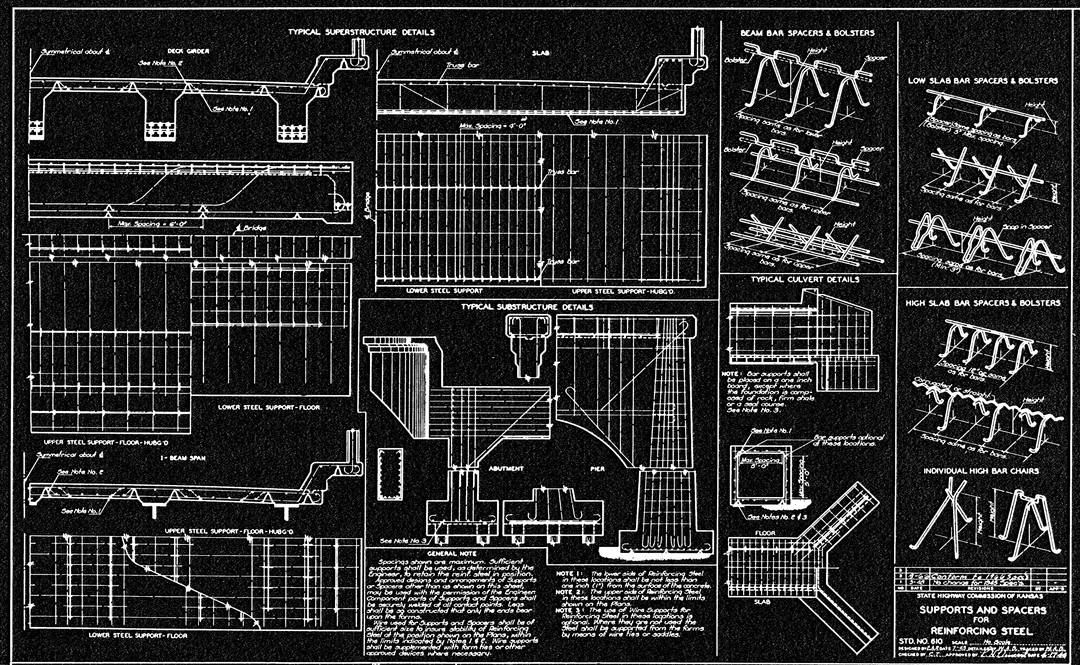

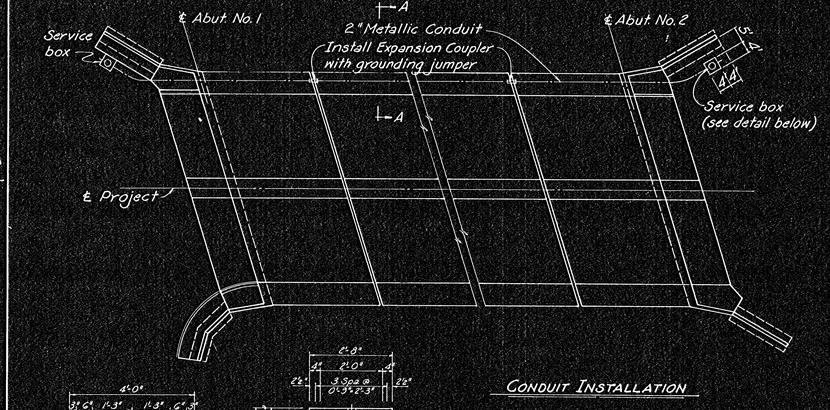

Note:
The item of Conduit Installation will include all work and material necessary to install 2" conduit as shown, including pipe hangers and expansion joints, and construction of concrete service boxes as detailed; except that rings and covers for service boxes will be furnished by the City of Wichita, Traffic Engineering Department.



SECTION A-A

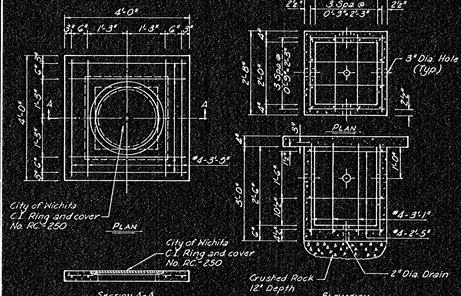

SERVICE BOX DETAIL

Bar List
16 #4 2'-5"
12 #4 3'-1"
8 #4 3'-9"

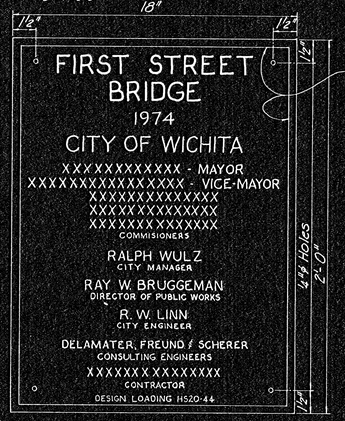

PROJECT MARKER

Note:
XXXX Names as directed by the Engineer, furnished by the City Engineer. Contractor furnish rubbing before casting.

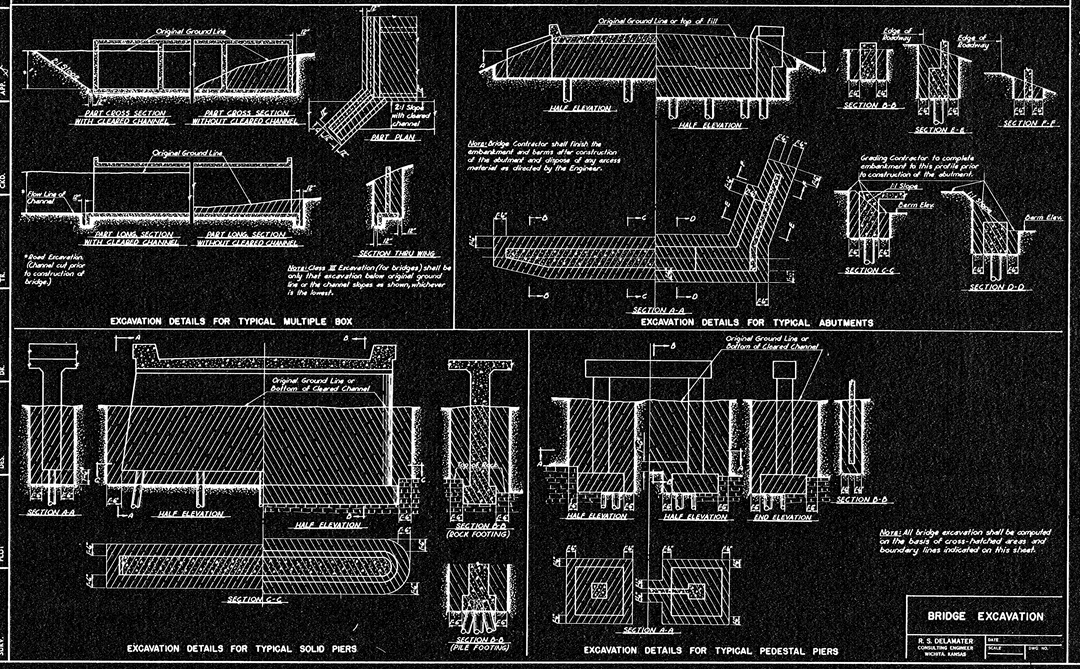

CITY OF WICHITA, KANSAS
R.W. LINN, P.E., CITY ENGINEER

FIRST STREET BRIDGE OVER THE ARKANSAS RIVER
BAR SUPPORTS, BR. EXCAVATION AND MISCELLANEOUS DETAILS

DELAMATER, FREUND & SCHERER, P.A.
CONSULTING ENGINEERS
WICHITA, KANSAS

SCALE — DATE June, 1974 — DWG. NO. 89-G-24