


BENCHMARKS:
BM #1: "X" on the West End of the Steel Casing Pipe at the Railroad Crossing South of 37th Street North Sta. 25+90.41' Rt. Elev. = 1336.58 MSL

BM #2: Steel T-Post Driven 4' Deep Sta. 18+00.25' Rt. Elev. = 1337.73 MSL

BM #3: "C" in the Concrete Footing of the SBC Pedestal in the South West Corner of 37th Street North and Tyler Road Sta. 8+56.95' Rt. Elev. = 1342.17 MSL

BM #4: Railroad Spike in the East Face of the 2nd Power Pole North of 37th Street and West of Tyler Road Sta. 94+24.48' Lt. Elev. = 1342.85 MSL

Scale: 1" = 20'
• = Iron

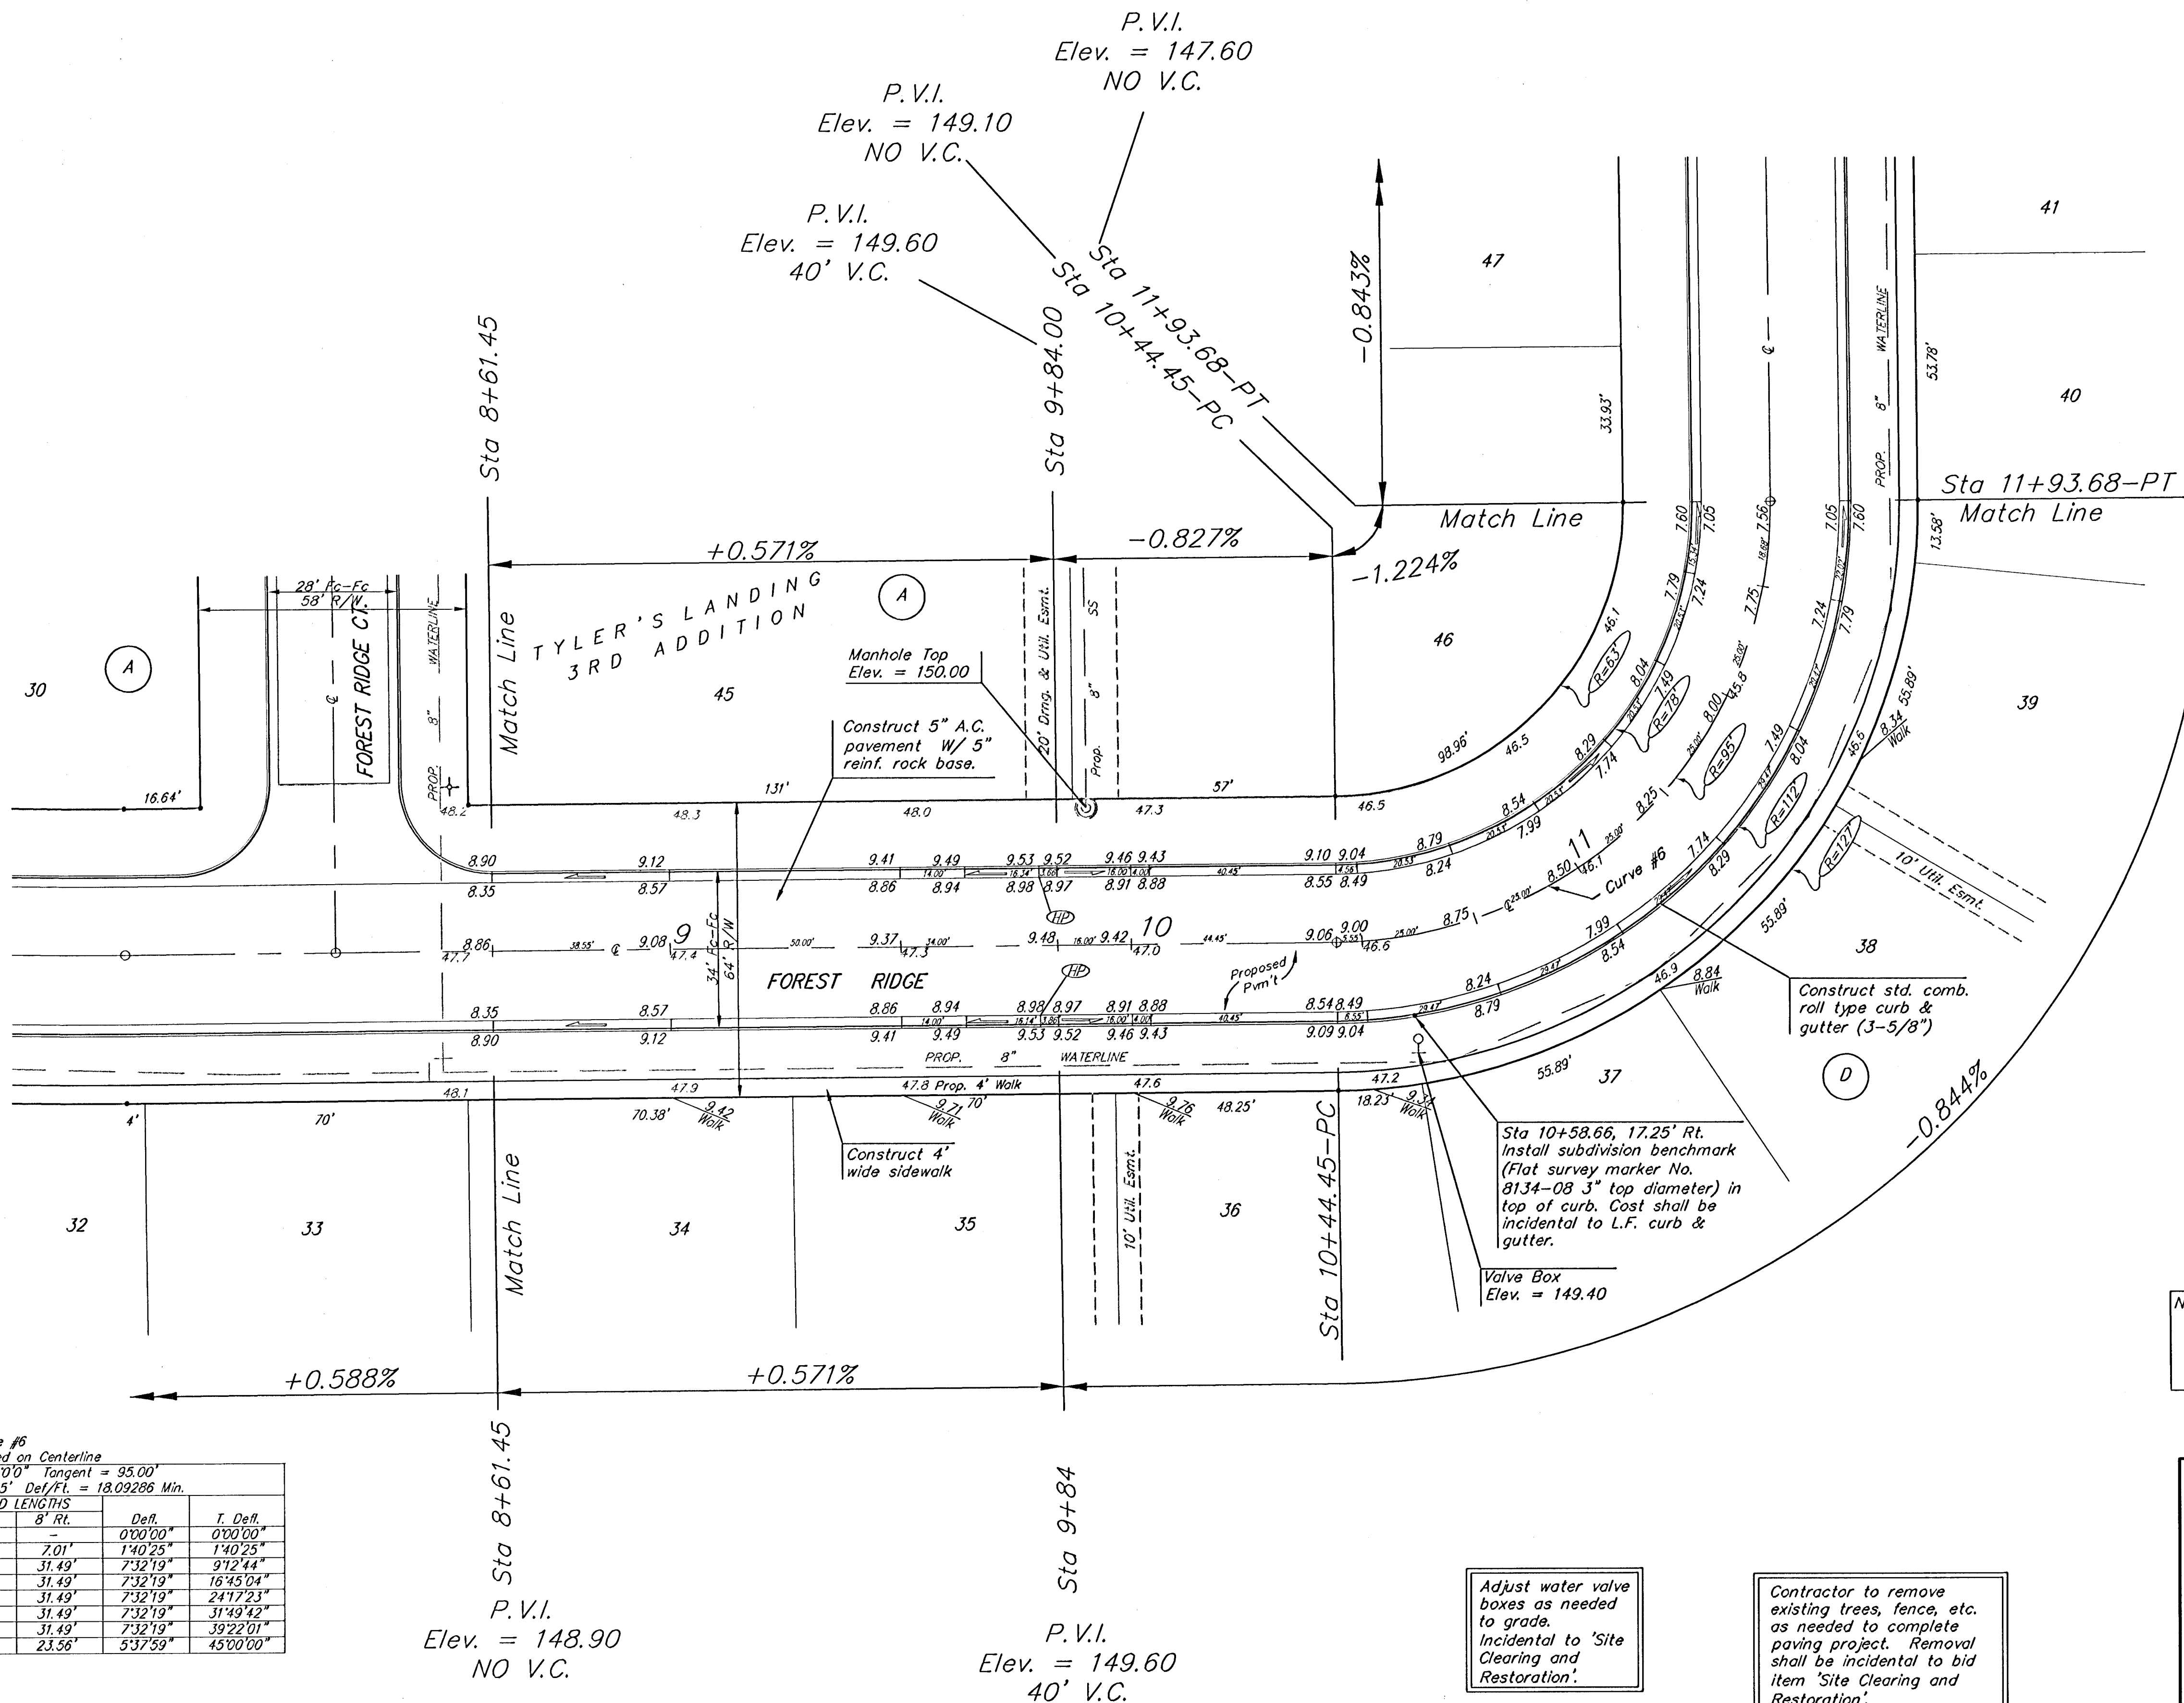

NOTE: ROLL TYPE CURB & GUTTER TO BE CONSTRUCTED ON THE PAVEMENT SHOWN ON THIS SHEET. TOP OF CURB ELEVATIONS ARE GIVEN FOR FULL HEIGHT CURB.

Curve #6
Curve Data Based on Centerline
Rad. = 95' Delta = 90°0'0" Tangent = 95.00'
Arc = 149.23' L.C. = 134.35' Del/Ft. = 18.09286 Min.

Station	Arc	FACE CHORD LENGTHS		Def.	T. Def.
		8' Lt.	8' Rt.		
10+44.45	5.55'	4.09'	7.01'	0°00'00"	0°00'00"
10+50.00	25.00'	18.37'	31.49'	7°32'19"	1°40'25"
10+75.00	25.00'	18.37'	31.49'	7°32'19"	9°12'44"
11+00.00	25.00'	18.37'	31.49'	7°32'19"	16°45'04"
11+25.00	25.00'	18.37'	31.49'	7°32'19"	24°17'23"
11+50.00	25.00'	18.37'	31.49'	7°32'19"	31°49'42"
11+75.00	25.00'	18.37'	31.49'	7°32'19"	39°22'01"
11+93.68	18.68'	13.74'	23.56'	5°37'59"	45°00'00"

Adjust water valve boxes as needed to grade. Incidental to 'Site Clearing and Restoration'.

Contractor to remove existing trees, fence, etc. as needed to complete paving project. Removal shall be incidental to bid item 'Site Clearing and Restoration'.

Baughman Tyler's Landing 3rd Addition - Phase I
Forest Ridge
STA 8+61.45 TO STA 11+93.68

Baughman Company, P.A. 315 W. St. Wichita, KS 67211 P 316-262-7771 F 316-262-0149
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

PROJECT NUMBER 472-84262	DESIGN AEG	DRAWN JWH/TMS
REVISIONS:	APPROVED	DATE 08/05
	SCALE Noted	SHEET 8 OF 52

tylers landing 3rd add.dwg 05-07-E283