


BENCHMARKS:

BM #1: CITY OF WICHITA BENCHMARK DISC, TOP OF CURB AT WEST END OF CURB RETURN, NORTHWEST CORNER OF INTERSECTION OF CITY VIEW AND SHERIAC CIR. IN SHADOW WOODS ADDITION.
ELEV. = 1386.66 NGVD29

BM #2: CITY OF WICHITA BENCHMARK DISC, TOP OF CURB BY FIRE HYDRANT AT WEST END OF CURB RETURN, NORTHWEST CORNER OF INTERSECTION OF SHERIAC CIR. AND SHERIAC CT., SOUTH OF SE CORNER OF LOT 13, BLOCK B, SHADOW WOODS ADDITION.
ELEV. = 1392.11 NGVD29



BM #3: "□" CUT IN TOP OF WEST CURB BETWEEN LOTS 16 AND 17, BLOCK F, HIGHLAND SPRINGS 3RD ADDITION
ELEV. = 1370.21 NGVD29

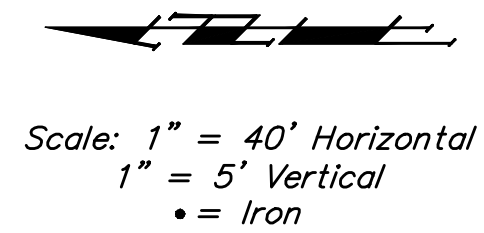

Contractor shall remove existing Concrete Barricades and Deliver to the City of Wichita West Maintenance Sub-Station (Central & I-235). Contact Don Craddock at 337-9192 one week prior to delivering concrete barricades. Cost shall be included in "Site Clearing and Restoration."

- Notes:**
- Gate shall be 12' wide and a min. of 50" tall constructed of tubular steel, painted or other corrosion resistant coating. Gate shall be mounted on 10" Dia. treated wood gate posts and shall include a chain and latch.
 - Gate posts shall extend a minimum of 30" below ground and shall be cast in concrete the entire depth at least 8" out from the posts (26" Dia. hole).
 - Fence material shall be 48" H x 6" Spacing x 12.5 Gauge galvanized Field Fence and shall be fastened to 4" Dia. Treated wood fence posts.
 - Fence posts shall extend a min. of 30" below ground and shall be spaced at a maximum distance of 8'.
 - All cost associated with construction of Gate and Fence shall be included in the lump sum bid item "Site Clearing & Restoration."

Note: Trees in this area may be removed only as necessary for Sanitary Sewer Construction with developer and land owner's approval. Trees that require trimming shall be side trimmed with a chainsaw to minimize damage.

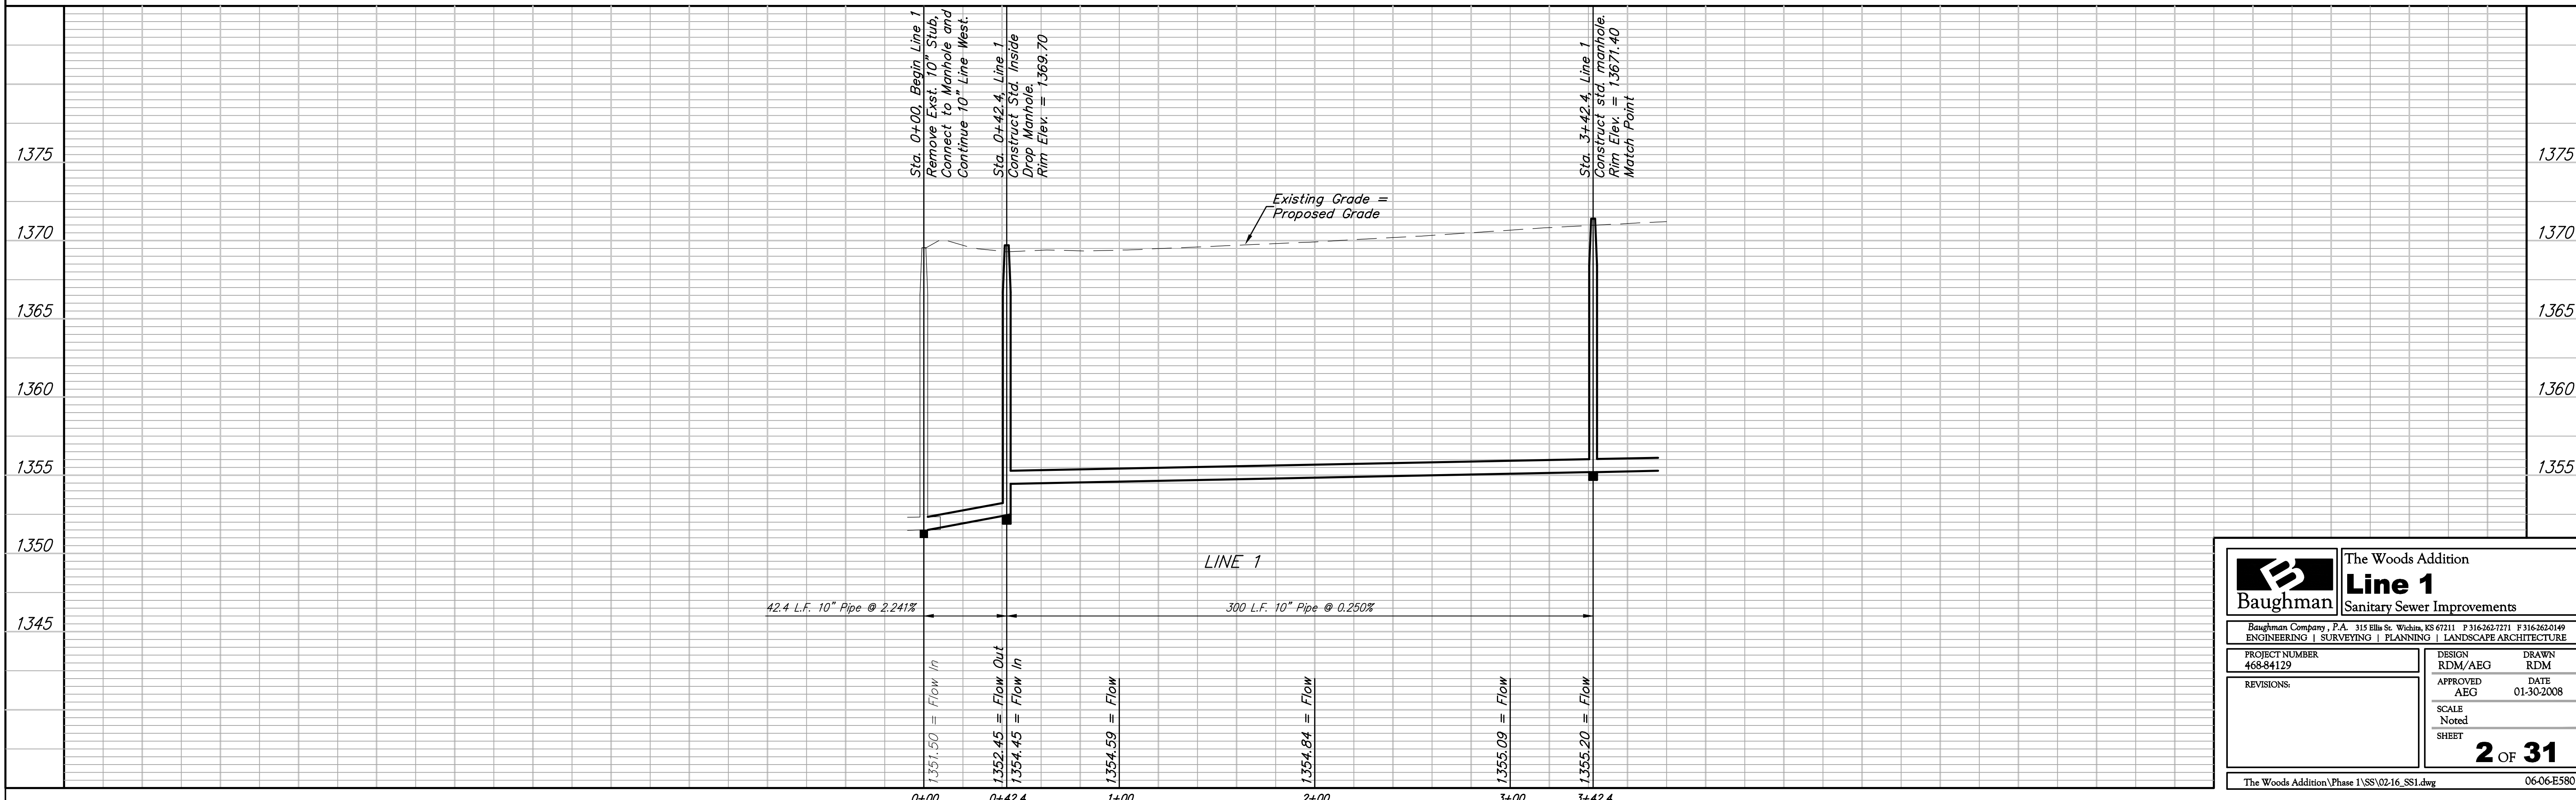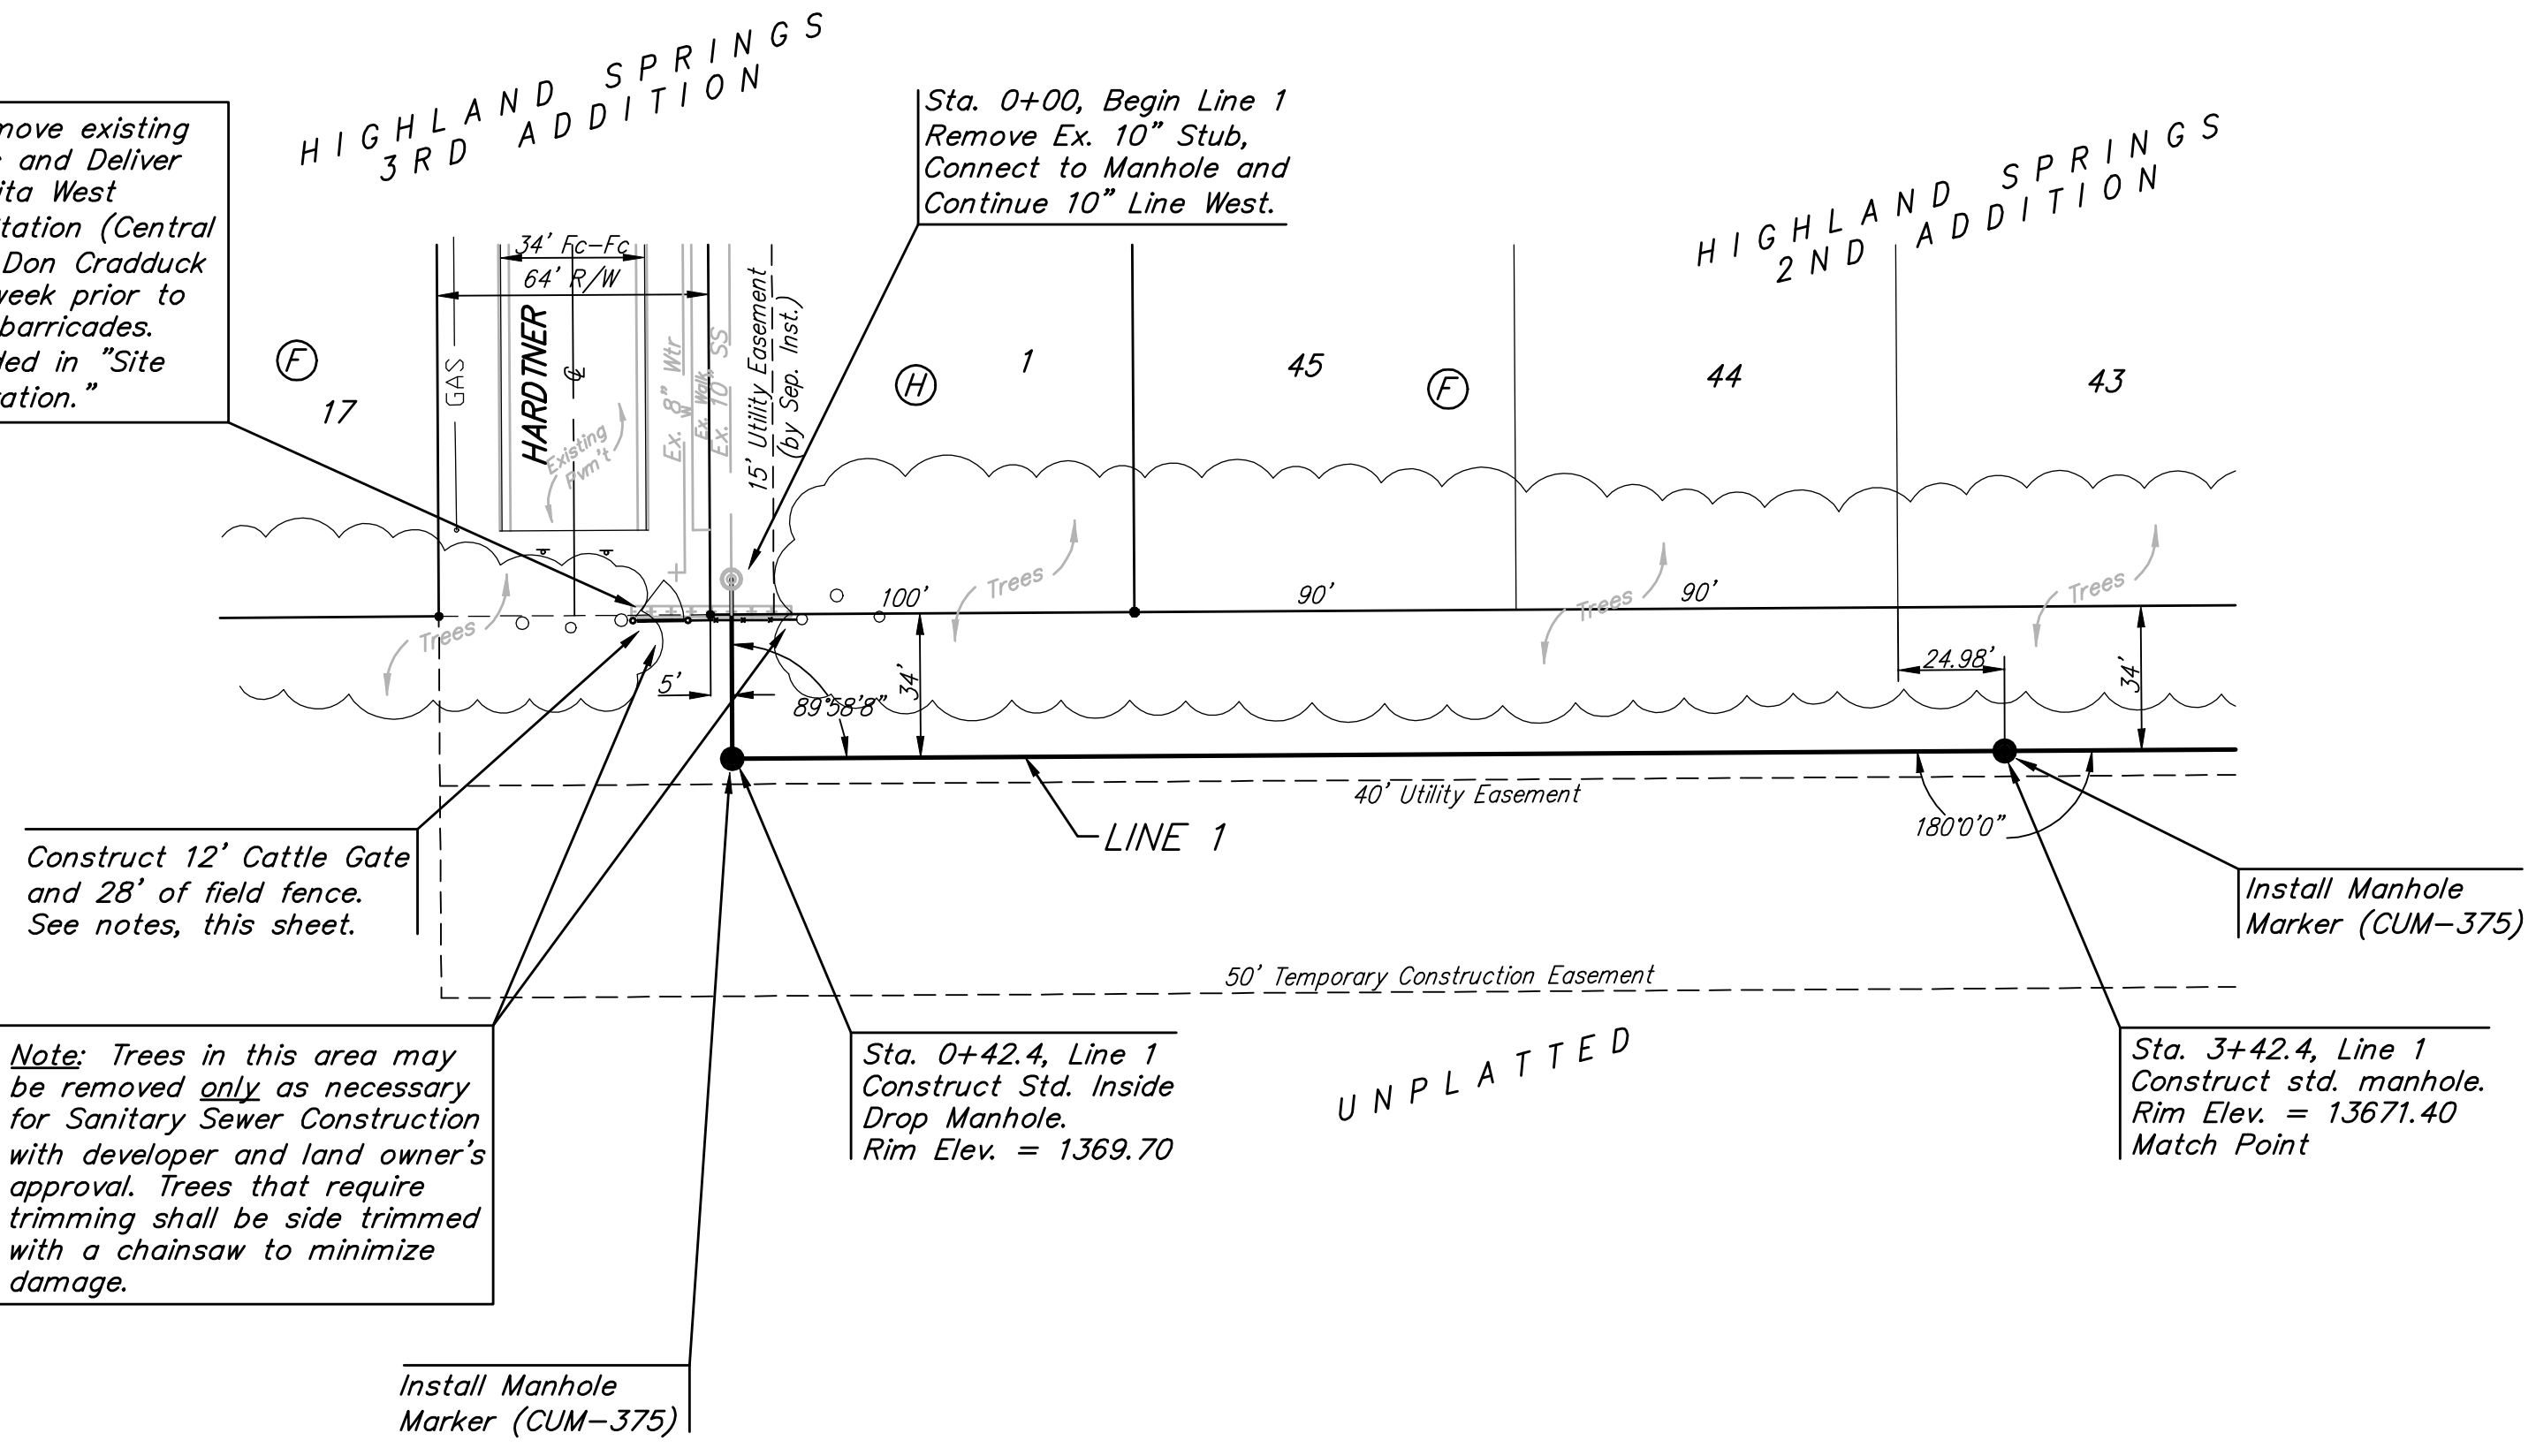

Baughman		The Woods Addition Line 1 Sanitary Sewer Improvements	
Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316-262-7271 F 316-262-0149 ENGINEERING SURVEYING PLANNING LANDSCAPE ARCHITECTURE			
PROJECT NUMBER 468-84129	DESIGN RDM/AEG	DRAWN RDM	APPROVED AEG
REVISIONS:	DATE 01-30-2008	SCALE Noted	SHEET 2 OF 31
The Woods Addition\Phase 1\SSV02-16_SS1.dwg			06-06-E580