
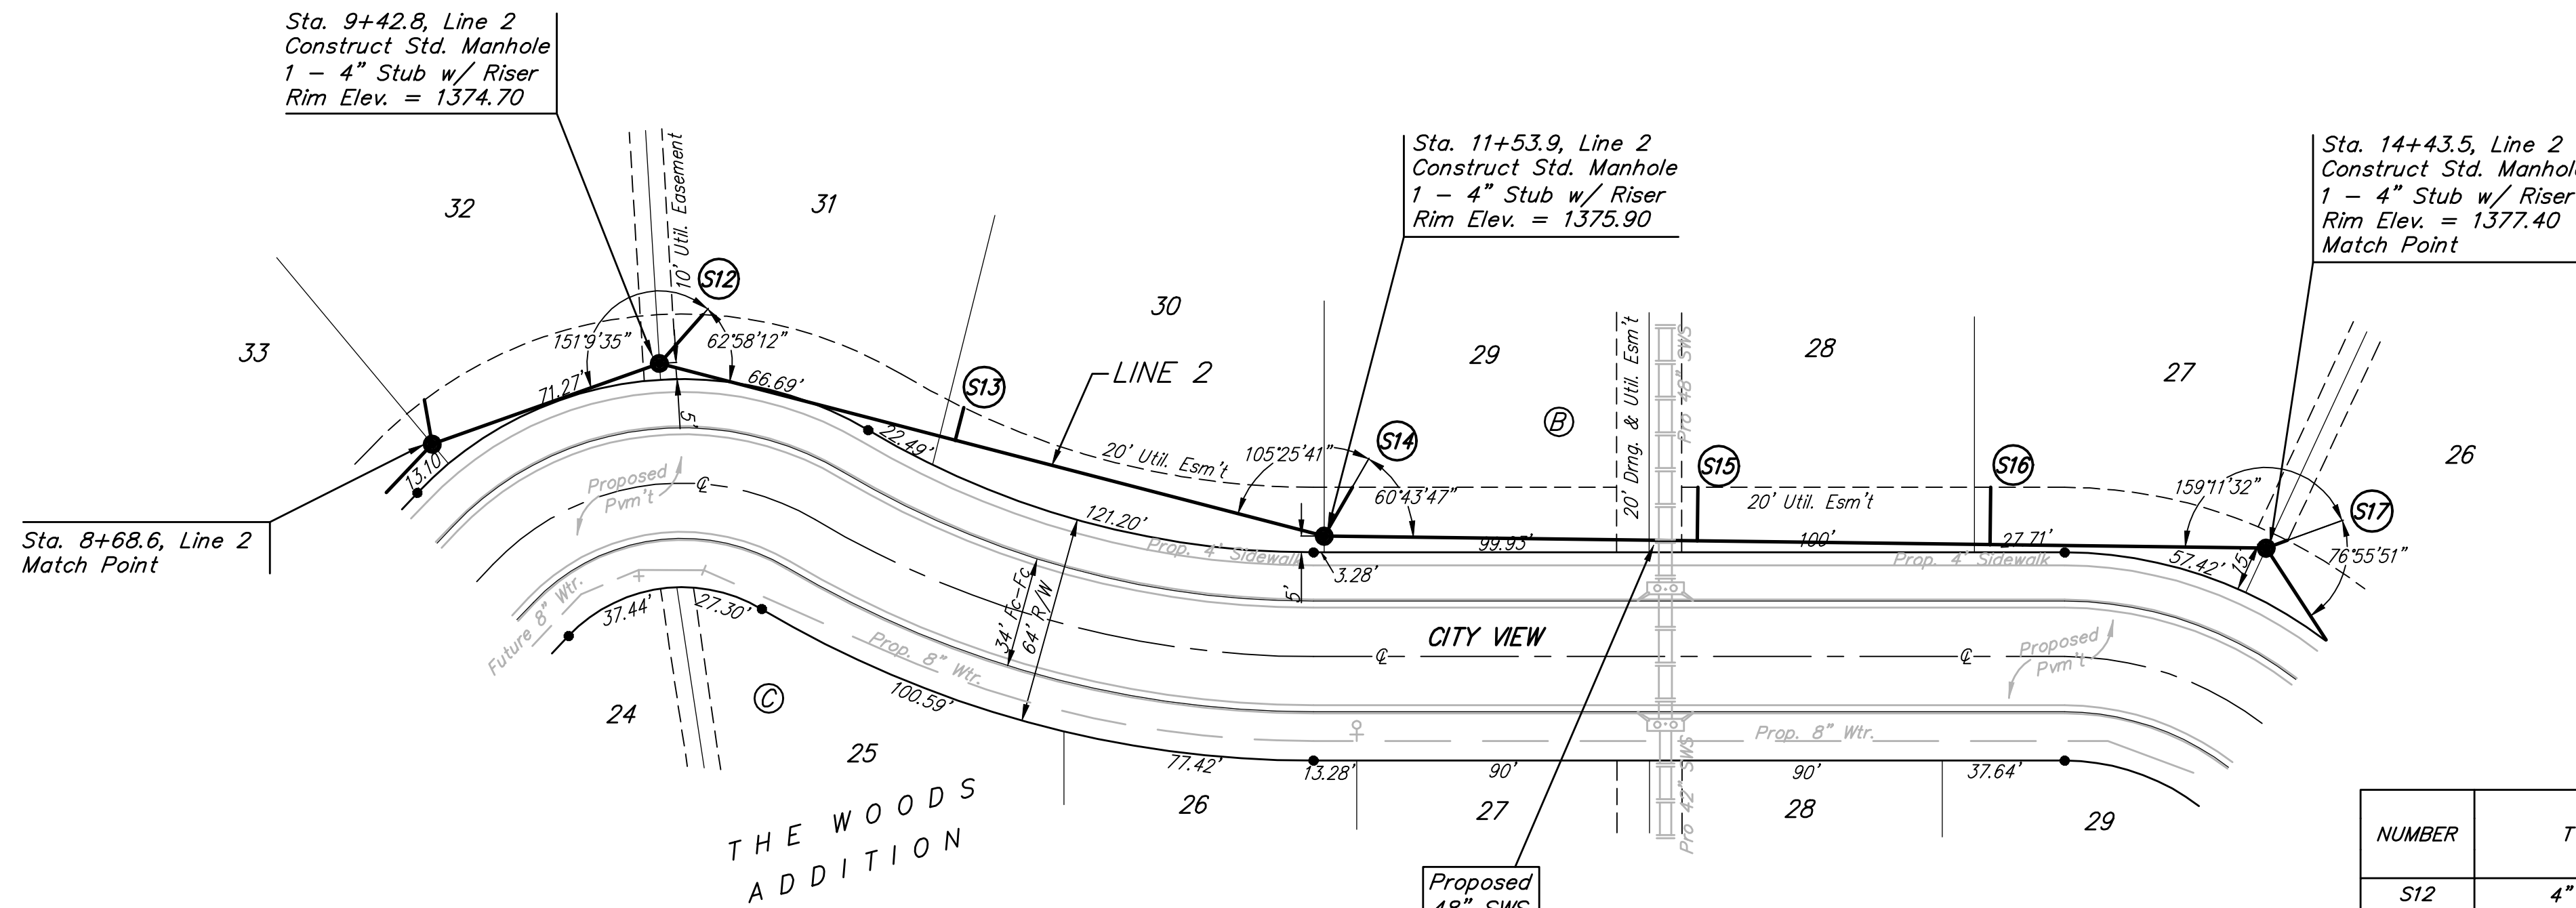


**Benchmark:**

BM #1: City Of Wichita Benchmark  
Disc, Top Of Curb At West End Of  
Curb Return, Northwest Corner Of  
Intersection Of City View And Sheriac  
Cir. In Shadow Woods Addition.  
Elev. = 1386.66 NGVD29

BM #2: City Of Wichita Benchmark  
Disc, Top Of Curb By Fire Hydrant At  
West End Of Curb Return, Northwest  
Corner Of Intersection Of Sheriac Cir.  
And Sheriac Ct., South Of Se Corner  
Of Lot 13, Block B, Shadow Woods  
Addition.  
Elev. = 1392.11 NGVD29

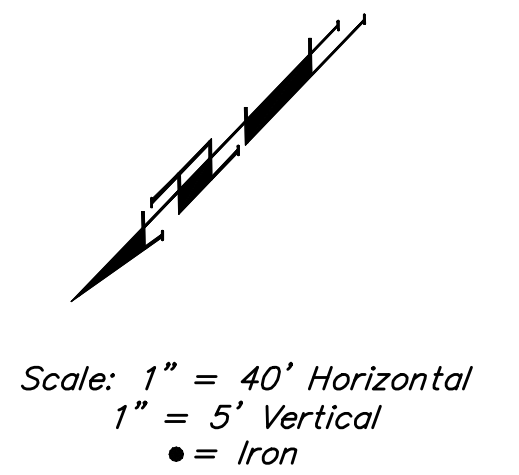


SEWER SERVICE TABLE

NUMBER	TYPE	LOCATION			FOR INFORMATION ONLY		
		LOT NO.	BLOCK NO.	LINE NO.	APPROXIMATE LENGTH 4" PIPE		
					STATION/DIRECTION	VERTICAL	HORIZONTAL
S12	4" Stub	31	B	2	9+42.8/Lt.	8'	20'
S13	8" X 4" Tee	30	B	2	10+36.7/Lt.	8'	10'
S14	4" Stub	29	B	2	11+53.9/Lt.	9'	17'
S15	8" X 4" Tee	28	B	2	12+68.6/Lt.	9'	16'
S16	8" X 4" Tee	27	B	2	13+58.6/Lt.	9'	18'
S17	4" Stub	26	B	2	14+43.5/Lt.	9'	7'

Trees and shrubs in public right-of-way which are in direct conflict with proposed new construction shall be removed by the Contractor ONLY with the Developer or Baughman Company approval. Trees and shrubs which are not in direct conflict with proposed new construction shall be saved and protected from damage.

From Station 8+68.6 to Station 14+43.5, Line 2, the trenches shall be Backfilled with Sand, Jetted, and Vibrated. (574.9 L.F. Sand Backfill)

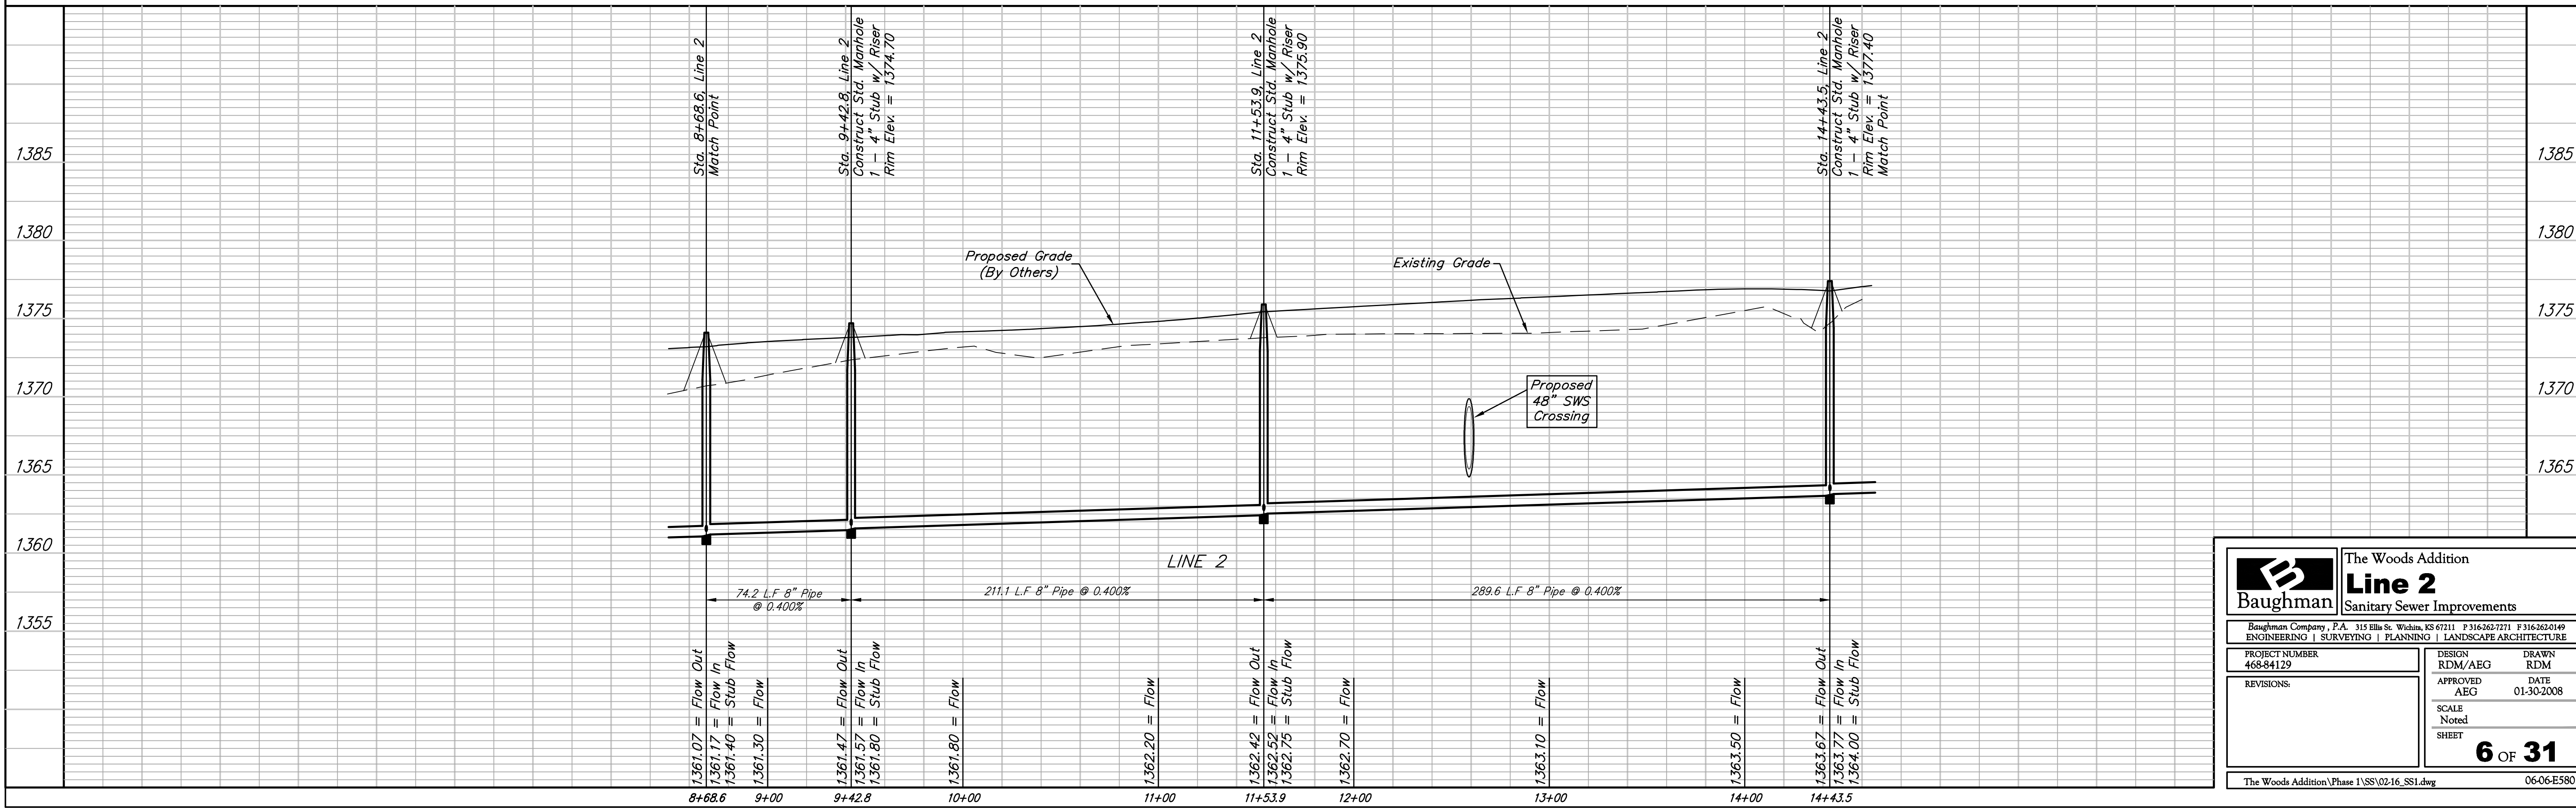

**Baughman**

Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316-262-7271 F 316-262-0149  
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

The Woods Addition  
**Line 2**  
Sanitary Sewer Improvements

PROJECT NUMBER  
468-84129

DESIGN  
RDM/AEG

APPROVED  
AEG

REVISIONS:

DRAWN  
RDM

DATE  
01-30-2008

SCALE  
Noted

SHEET  
**6 OF 31**

The Woods Addition\Phase 1\SSV02-16\_SS1.dwg 06-06-E580