




DSNR: RAS OPER: DRP SCALE: 1"=5'
 I:/2002/02633/LAYOUT/PLAN.DGN 9-15-2004 7:35:44 LAST REV: 9-17-2004 BY: drp

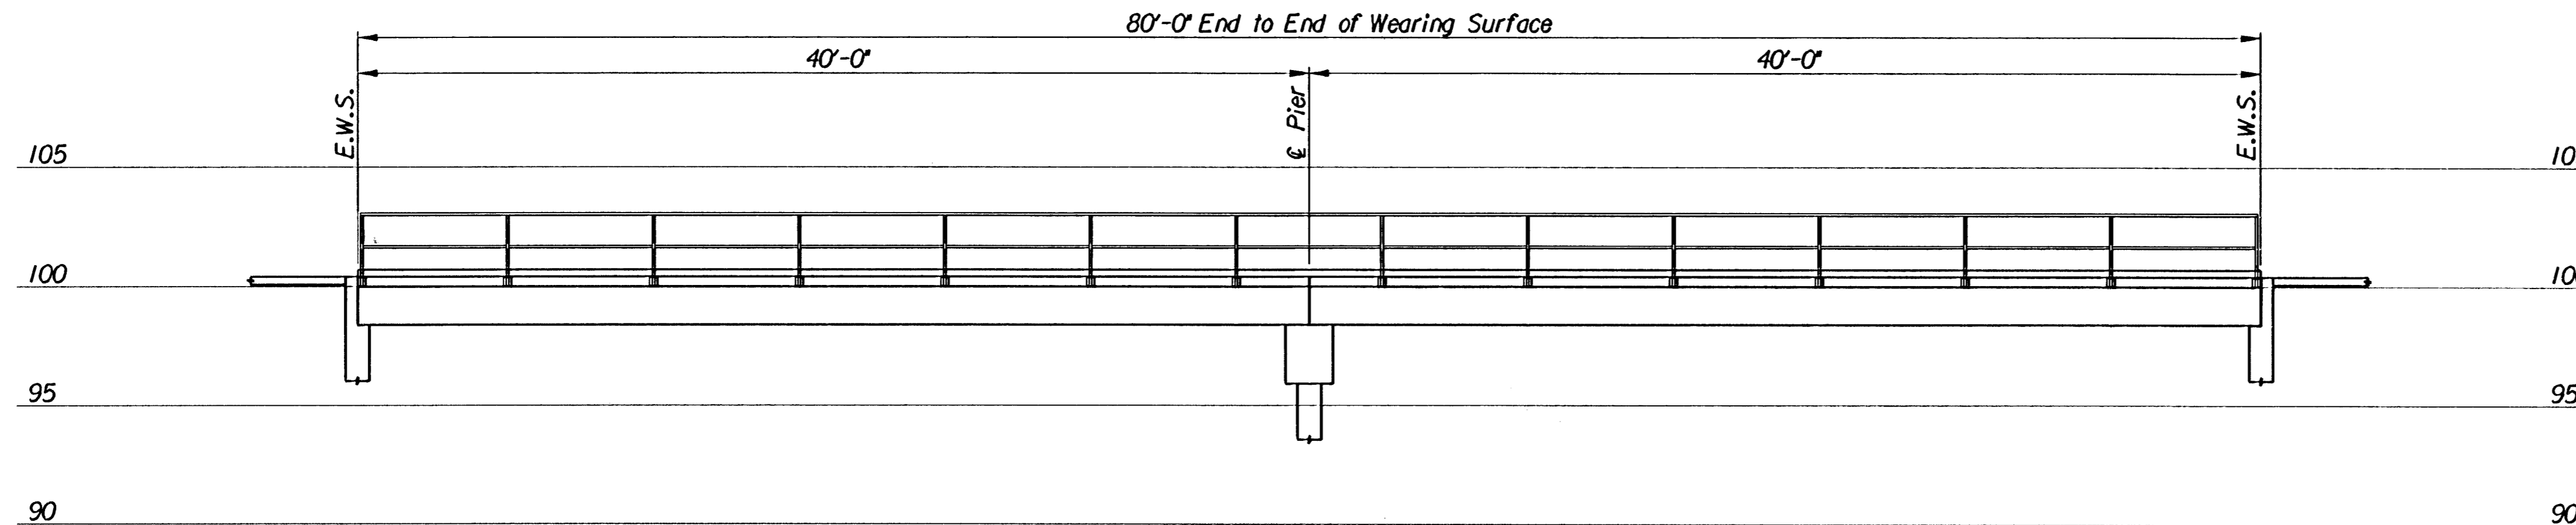

ELEVATION
 2 @ 40'-0" Double-Tee Beam Spans
 Pile Bent Pier

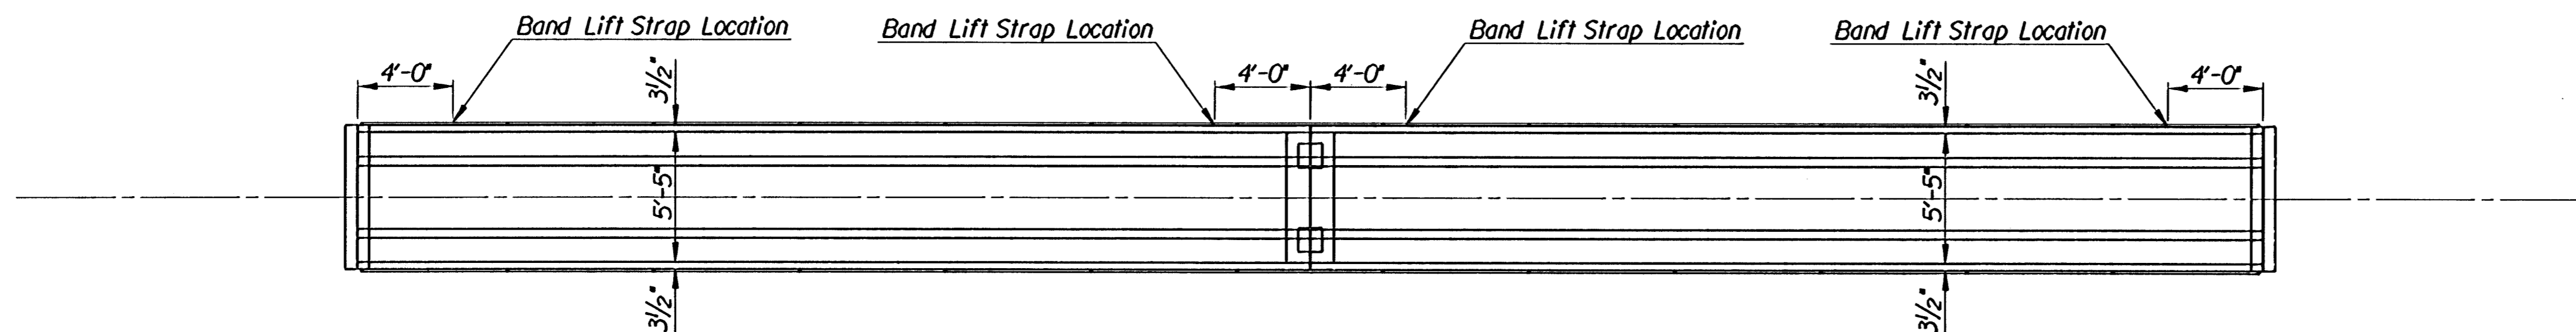

PLAN

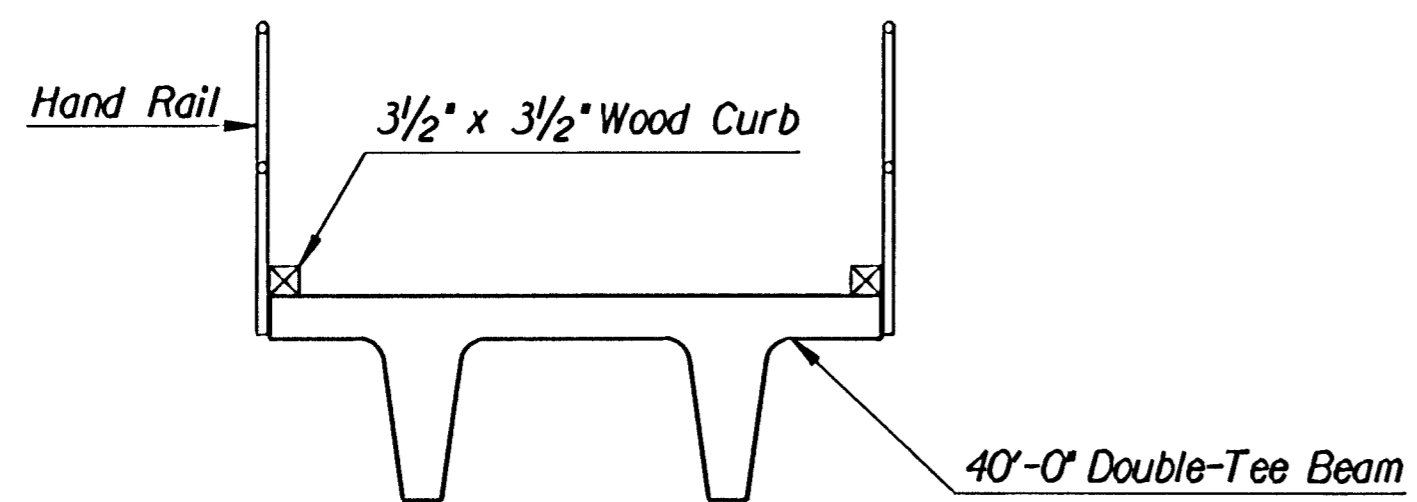


SECTION

4.42 sq. ft.
 40'-0" Span = 176.80 c.f. = 26520 lbs.
 2-40'-0" Spans = 353.60 c.f. = 53040 lbs.

Note:
 Care must be taken, prior to resetting, to support Double-Tee Beams a maximum of 4'-0" from the ends.

REMOVAL AND RESETTING SEQUENCE

1. Remove Hand Rail
2. Remove 3/2" x 3/2" Wood Curb
3. Remove 2-40'-0" Double-Tee Beam Spans
4. Reset in Reverse Order



MAIN 17, FOUR MILE CREEK CRESTVIEW SEWER - PHASE 1 SANITARY SEWER LINE NO. 1, STA. 57+11.16 REMOVAL AND RESET DETAILS JAMES L. ARMOUR, P.E. - ACTING CITY ENGINEER CITY OF WICHITA PROJECT NO. 468-82903	
Professional Engineering Consultants, P.A. 308 S. TOPEKA - WICHITA, KANSAS 67202 316-262-2691 • FAX 316-262-3003	
Designed by RAS Drawn by DRP	Job No. 35-02633-3697 Date LY 2004
19 of 23	