


RESERVE "A"

Scale: 1" = 60'

Pond data:
 Static water elev. = 1320
 100'-yr water elev. is
 Variable along reach

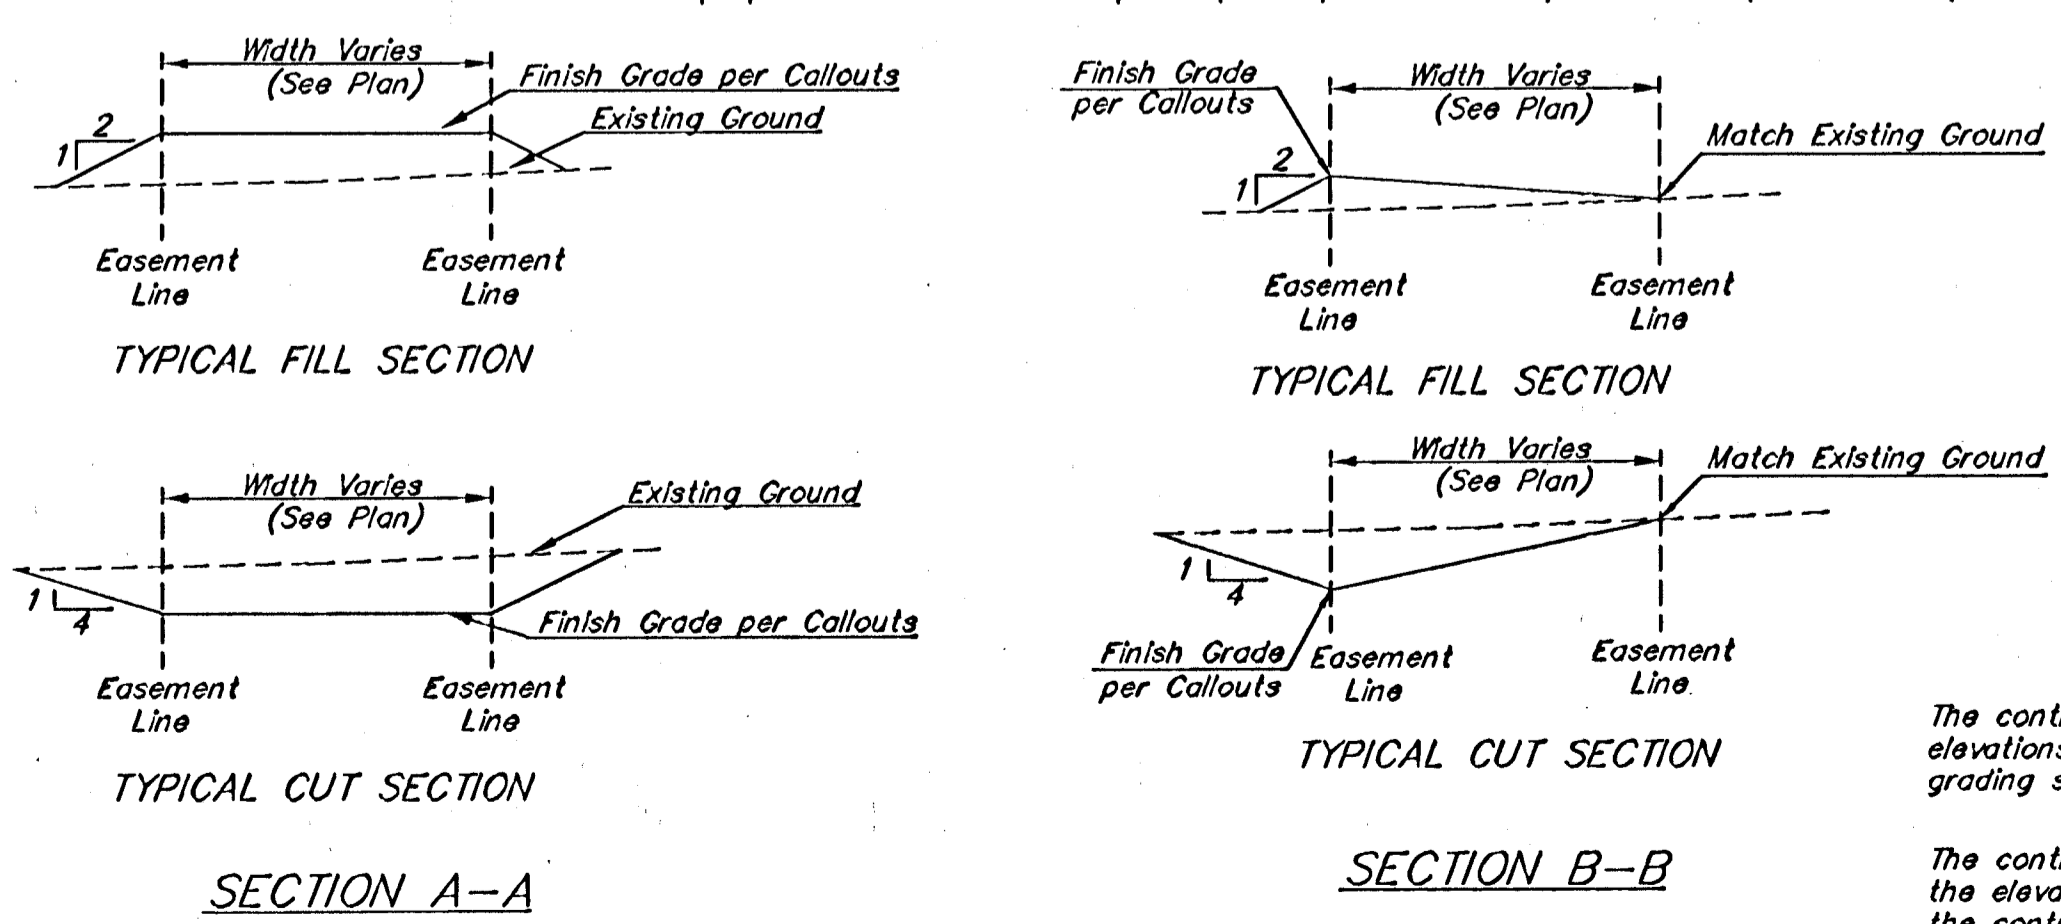

Maintain silt fence sediment barriers, typ.

Maintain/Establish hay bale sediment barriers, typ.

Maintain/Establish hay bale sediment barriers, typ.

Remove existing driveway and culvert pipe into field. Regrade ditch to ensure smooth flowline. Drive is approx. 205' north of centerline of Jewell St. Incidental to bid item 'Site Clearing and Restoration'.

█ = Easements To Be Graded

— 175 — Proposed Grade

All areas disturbed during construction not under proposed pavement are to be seeded as follows:
 Seed - Rye Grass (P.S.) - 5#/1000 Sq. Ft.
 Cost of seeding shall be incidental to "Project Seeding".

The contractor shall grade the easements as shown to the elevations given on the easement grading plan. All costs for grading shall be incidental to the Easement Grading Bid Item.
 The contractor shall 'straight' grade the easements between the elevations given. Where a callout designates 'Match', the contractor will grade to the existing ground elevation.

Notes:
 Paving Contractor shall use this plan sheet to final grade easements that are disturbed during the paving/storm water sewer construction phase. The easements will originally be graded with the mass grading-Phase 1 project. Some erosion control might be installed at that time also. Paving Contractor will be responsible for final grades and maintaining/establishing Erosion Control BMP's in Phase 1 paving project limits.

		TURKEY CREEK ADDITION - PH. I	
		ESMT. GRADING PLAN	
Baughman Company, P.A. 313 1/2 St. W. Wichita, KS 67211 P 316-262-7111 F 316-262-4149 ENGINEERING SURVEYING PLANNING LANDSCAPE ARCHITECTURE		DESIGN	DATE
PROJECT NUMBER	472-84028	APPROVED	DATE
REVISIONS		SCALE	NOTED
			SHEET
		30 OF 48	
TurkeyCreek/EnvGrade		04-06-0931	