

SCANNED

STAFF REPORT
(One-Step Final Plat)

CASE NUMBER: S/D 99-74 -- AUBURN HILLS 10TH ADDITION

OWNER/APPLICANT: Auburn Hills, Inc., 12602 W. 13th, Wichita, KS 67235; City of Wichita, Attn: Mike Lindebak, 455 N. Main, 7th Floor, Wichita, KS 67202

SURVEYOR/ENGINEER: Baughman Company, P.A., 315 Ellis, Wichita, KS 67211

LOCATION: South of Maple, East of 135th St. West

SITE SIZE: 2.58 Acres

NUMBER OF LOTS

Residential:	7
Office:	
Commercial:	
Industrial:	
Total:	7


MINIMUM LOT AREA: 10,585 Sq. Ft.

CURRENT ZONING: SF-6, Single-Family Residential

PROPOSED ZONING: Same

SS, W, Pav, Drainage

VICINITY MAP

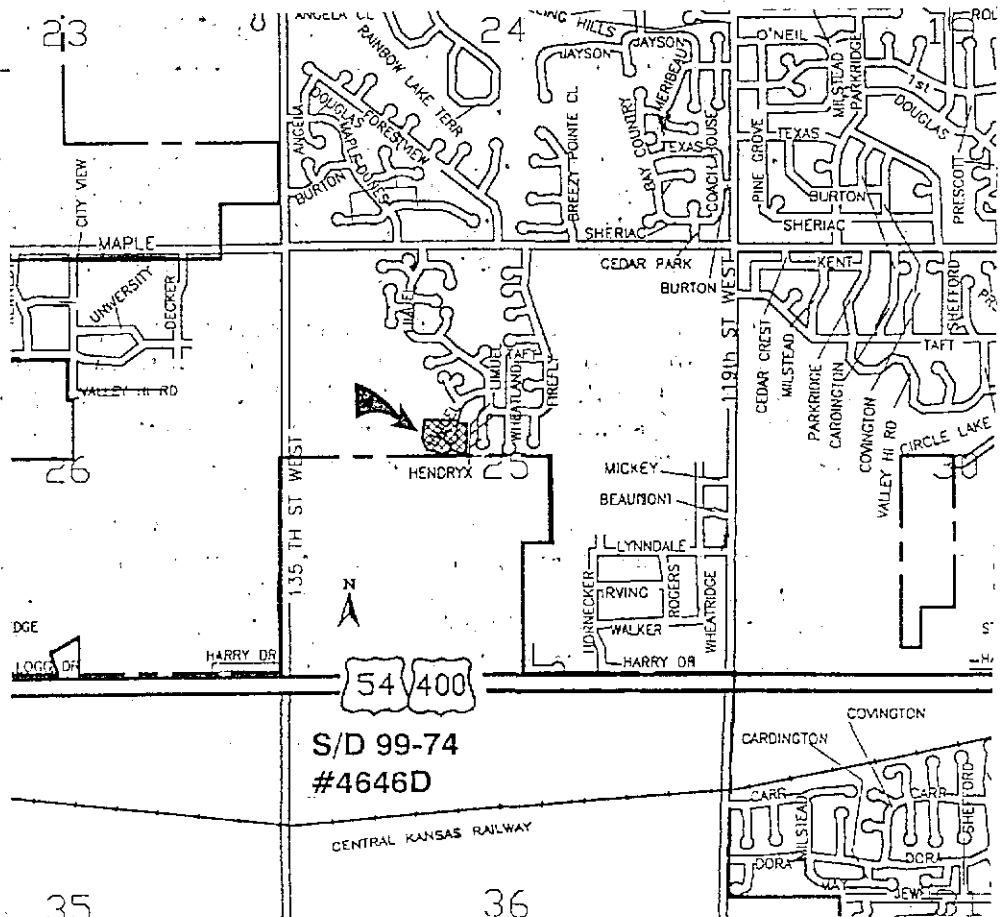

Note: This site is a replat of six lots in the Auburn Hills 6th Addition to incorporate part of Reserve D (golf course) in the Auburn Hills 8th Addition.

STAFF COMMENTS:

- A. City Engineering needs to comment on the existing guarantees and the need for any requirements for providing new guarantees.
- B. If improvements are guaranteed by petition, a notarized certificate listing the petitions shall be submitted to the Planning department for recording.
- C. County Engineering needs to comment on the status of the applicant's drainage plan.
- D. It is requested that the final plat tracing reference a tie point to a section corner.
- E. The minimum building openings shall be referenced in City datum and NGVD.
- F. The plat's text shall include language that a drainage plan has been developed for the plat and that all drainage easements, rights-of-way, or reserves shall remain at established grades or as modified with the approval of the applicable City or County Engineer, and unobstructed to allow for the conveyance of stormwater.
- G. The applicant shall install or guarantee the installation of all utilities and facilities which are applicable and described in Article 8 of the MAPC Subdivision Regulations. (Water service and fire hydrants required by Article 8 for fire protection shall be as per the direction and approval of the Chief of the Fire Department.)
- H. The applicant's engineer is advised that the Register of Deeds is requiring the name(s) of the notary public, who acknowledges the signatures on this plat, to be printed beneath the notary's signature.
- I. To receive mail delivery without delay, and to avoid unnecessary expense, the applicant is advised of the necessity to meet with the U.S. Postal Service Growth Management Coordinator (phone 316-729-0102) prior to development of the plat so that the type of delivery, and the tentative mailbox locations can be determined.
- J. The applicant is advised that various State and Federal requirements [specifically but not limited to the Army Corps of Engineers, Kanopolis Project Office, Rt. 1, Box 317, Valley Center, KS 67147] for the control of soil and wind erosion and the protection of wetlands may impact how this site can be developed. It is the applicant's responsibility to contact all appropriate agencies to determine any such requirements.
- K. The owner of the subdivision should be aware of the fact that the development of any subdivision greater than five (5) acres in size may require an NPDES Storm Water Discharge Permit from the Kansas Department of Health and Environment in Topeka. Further, on all construction sites, the City of Wichita requires that best management practices be used to reduce pollutant loadings in storm water runoffs.

SCANNED

- L. Perimeter closure computations shall be submitted with the final plat tracing.
- M. Recording of the plat within thirty (30) days after approval by the City Council and/or County Commission:
- N. The representatives from the utility companies should be prepared to comment on the need for any additional utility easements to be platted on this property.
- O. The applicant is reminded that a disk shall be submitted with the final plat tracing to the Planning Department detailing this plat in digital format in Release 13 version of AutoCAD. This will be used by the City and County GIS Department.

SCANNED

CLOSURE - AUBURN HILLS 10TH ADD.

L001

LINE	BEARING	LENGTH	CUMULATIVE DISTANCE	BEARING	CUMULATIVE DISTANCE	BEARING	CUMULATIVE DISTANCE
1				N	5000.000	S	0+00
N	72-13'19.0"W	102.000		E	5000.000	S	0+00
2				N	5031.144	S	1+02.000
S	59-55'43.0"W	65.000		E	4902.871	S	1+02.000
3				N	4998.574	S	1+67.000
N	78-44'58.0"W	75.000		E	4846.620	S	1+67.000
4				N	5013.206	S	2+42.000
N	46-15'17.0"W	83.390		E	4773.061	S	2+42.000
5				N	5070.866	S	3+25.390
N	37-48'22.0"W	171.000		E	4712.818	S	3+25.390
6				N	5205.972	S	4+96.390
N	13-18'18.0"E	118.690		E	4607.997	S	4+96.390
7				N	5321.476	S	6+15.080
N	01-00'00.0"W	29.560		E	4635.311	S	6+15.080
8				N	5351.031	S	6+44.640
N	89-00'00.0"E	241.430		E	4634.796	S	6+44.640
9				N	5355.245	S	8+86.070
S	01-00'00.0"E	27.000		E	4876.189	S	8+86.070
10				N	5328.249	S	9+13.070
N	89-00'00.0"E	117.590		E	4876.660	S	9+13.070
11				N	5330.301	S	10+30.660
S	01-00'01.5"E	330.352		E	4994.232	S	10+30.660
1				N	5000.000	S	13+61.012
LENGTH=		1361.012	AREA=		112279.195 SF		2.578 ACRES