


WATER VALVE BOX ELEVATIONS			
STREET	STATION	OFFSET	PROPOSED ELEVATION
OAK CREEK PARKWAY	@ S. Bd. 19+06.37	8.0' Lt.	1380.3

SCALE: 1"=20'

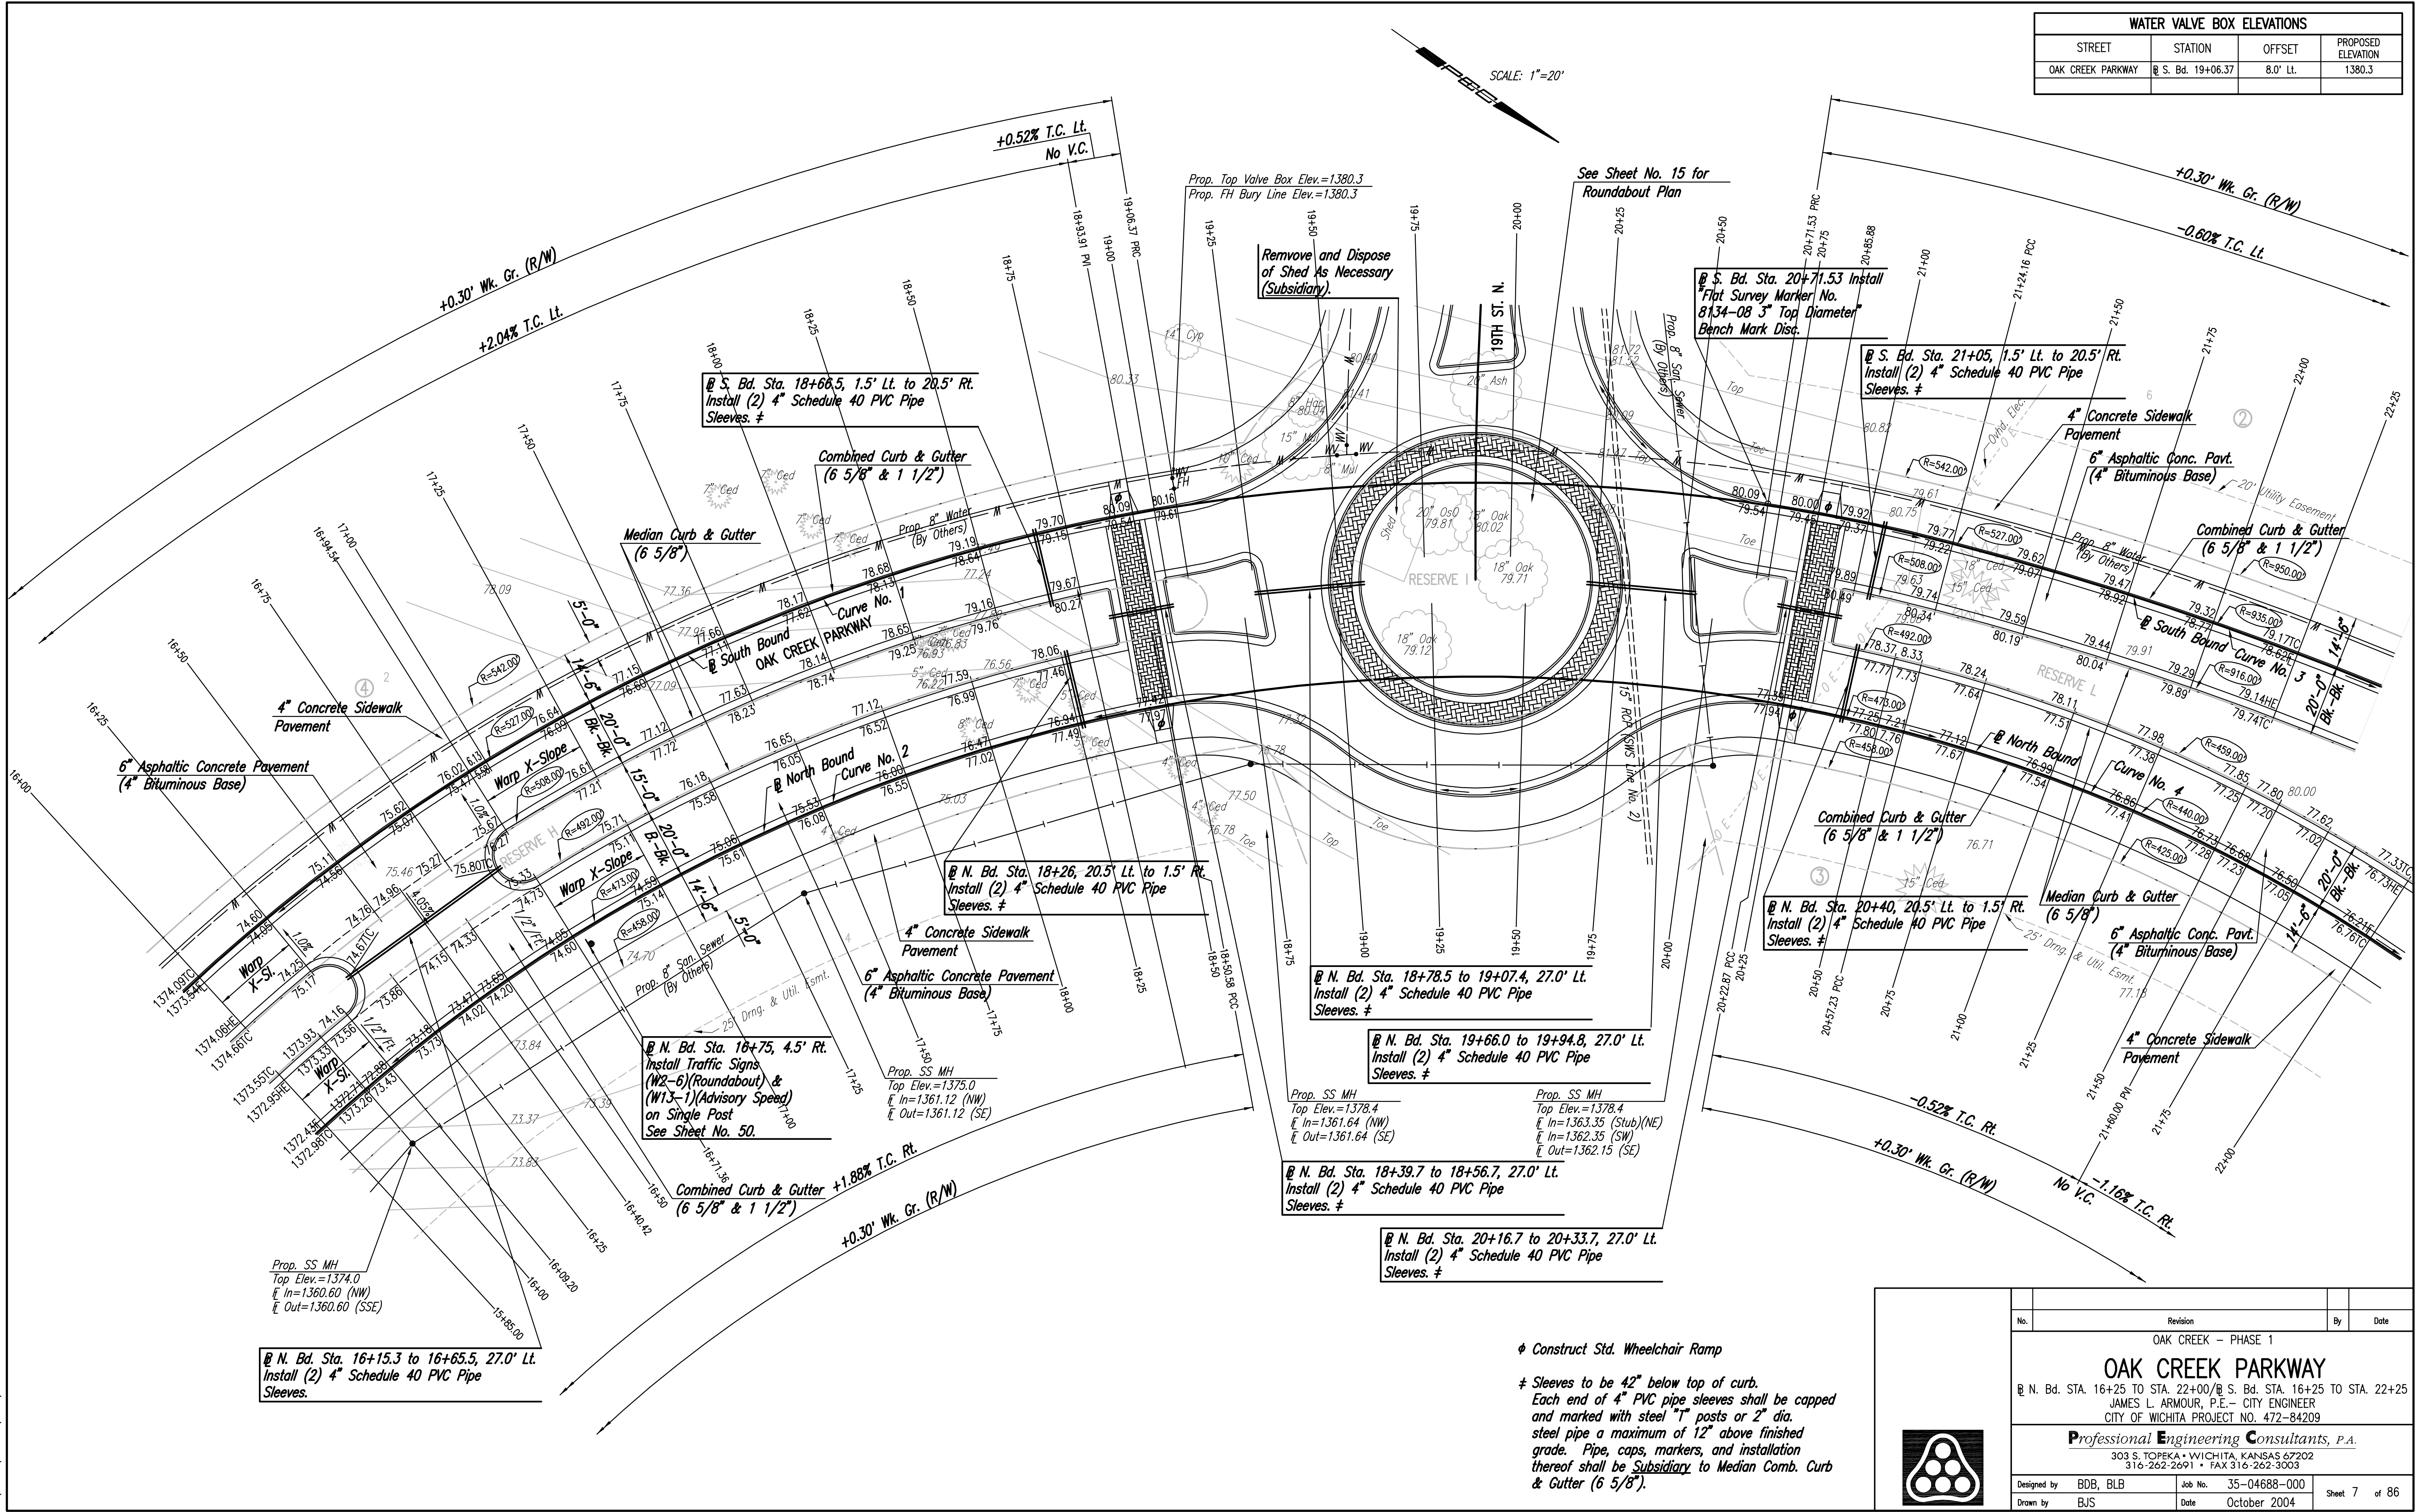

Remove and Dispose of Shed As Necessary (Subsidiary).

See Sheet No. 15 for Roundabout Plan

@ S. Bd. Sta. 20+71.53 Install Flat Survey Marker No. 8134-08 3" Top Diameter Bench Mark Disc.

@ S. Bd. Sta. 21+05, 1.5' Lt. to 20.5' Rt. Install (2) 4" Schedule 40 PVC Pipe Sleeves. #

@ S. Bd. Sta. 18+66.5, 1.5' Lt. to 20.5' Rt. Install (2) 4" Schedule 40 PVC Pipe Sleeves. #

Combined Curb & Gutter (6 5/8" & 1 1/2")

Median Curb & Gutter (6 5/8")

@ North Bound Curve No. 2

@ N. Bd. Sta. 18+26, 20.5' Lt. to 1.5' Rt. Install (2) 4" Schedule 40 PVC Pipe Sleeves. #

@ N. Bd. Sta. 18+78.5 to 19+07.4, 27.0' Lt. Install (2) 4" Schedule 40 PVC Pipe Sleeves. #

@ N. Bd. Sta. 19+66.0 to 19+94.8, 27.0' Lt. Install (2) 4" Schedule 40 PVC Pipe Sleeves. #

@ N. Bd. Sta. 18+39.7 to 18+56.7, 27.0' Lt. Install (2) 4" Schedule 40 PVC Pipe Sleeves. #

@ N. Bd. Sta. 20+16.7 to 20+33.7, 27.0' Lt. Install (2) 4" Schedule 40 PVC Pipe Sleeves. #

@ N. Bd. Sta. 16+15.3 to 16+65.5, 27.0' Lt. Install (2) 4" Schedule 40 PVC Pipe Sleeves.

Construct Std. Wheelchair Ramp

Sleeves to be 42" below top of curb. Each end of 4" PVC pipe sleeves shall be capped and marked with steel "T" posts or 2" dia. steel pipe a maximum of 12" above finished grade. Pipe, caps, markers, and installation thereof shall be Subsidiary to Median Comb. Curb & Gutter (6 5/8").

DSNR: BLB OPER: BJS SCALE: 1"=20.00  
 C:\2004\04688\000\04688-000-C-STR16-22 08-24-2005 12:24:27 am

No.	Revision	By	Date
	OAK CREEK - PHASE 1		
<b>OAK CREEK PARKWAY</b>			
@ N. Bd. STA. 16+25 TO STA. 22+00/@ S. Bd. STA. 16+25 TO STA. 22+25 JAMES L. ARMOUR, P.E. - CITY ENGINEER CITY OF WICHITA PROJECT NO. 472-84209			
<b>Professional Engineering Consultants, P.A.</b> 303 S. TOPKA • WICHITA, KANSAS 67202 316-262-2691 • FAX 316-262-3003			
Designed by	BDB, BLB	Job No.	35-04688-000
Drawn by	BJS	Date	October 2004
			Sheet 7 of 86

