


**NOTES:**

BENCH MARK:  
 SQ. CUT ON N.E. CORNER OF R.C.B. 890' N. OF E. 1/4  
 COR. SECTION 30 T26S R2E ELEV. 168.39'

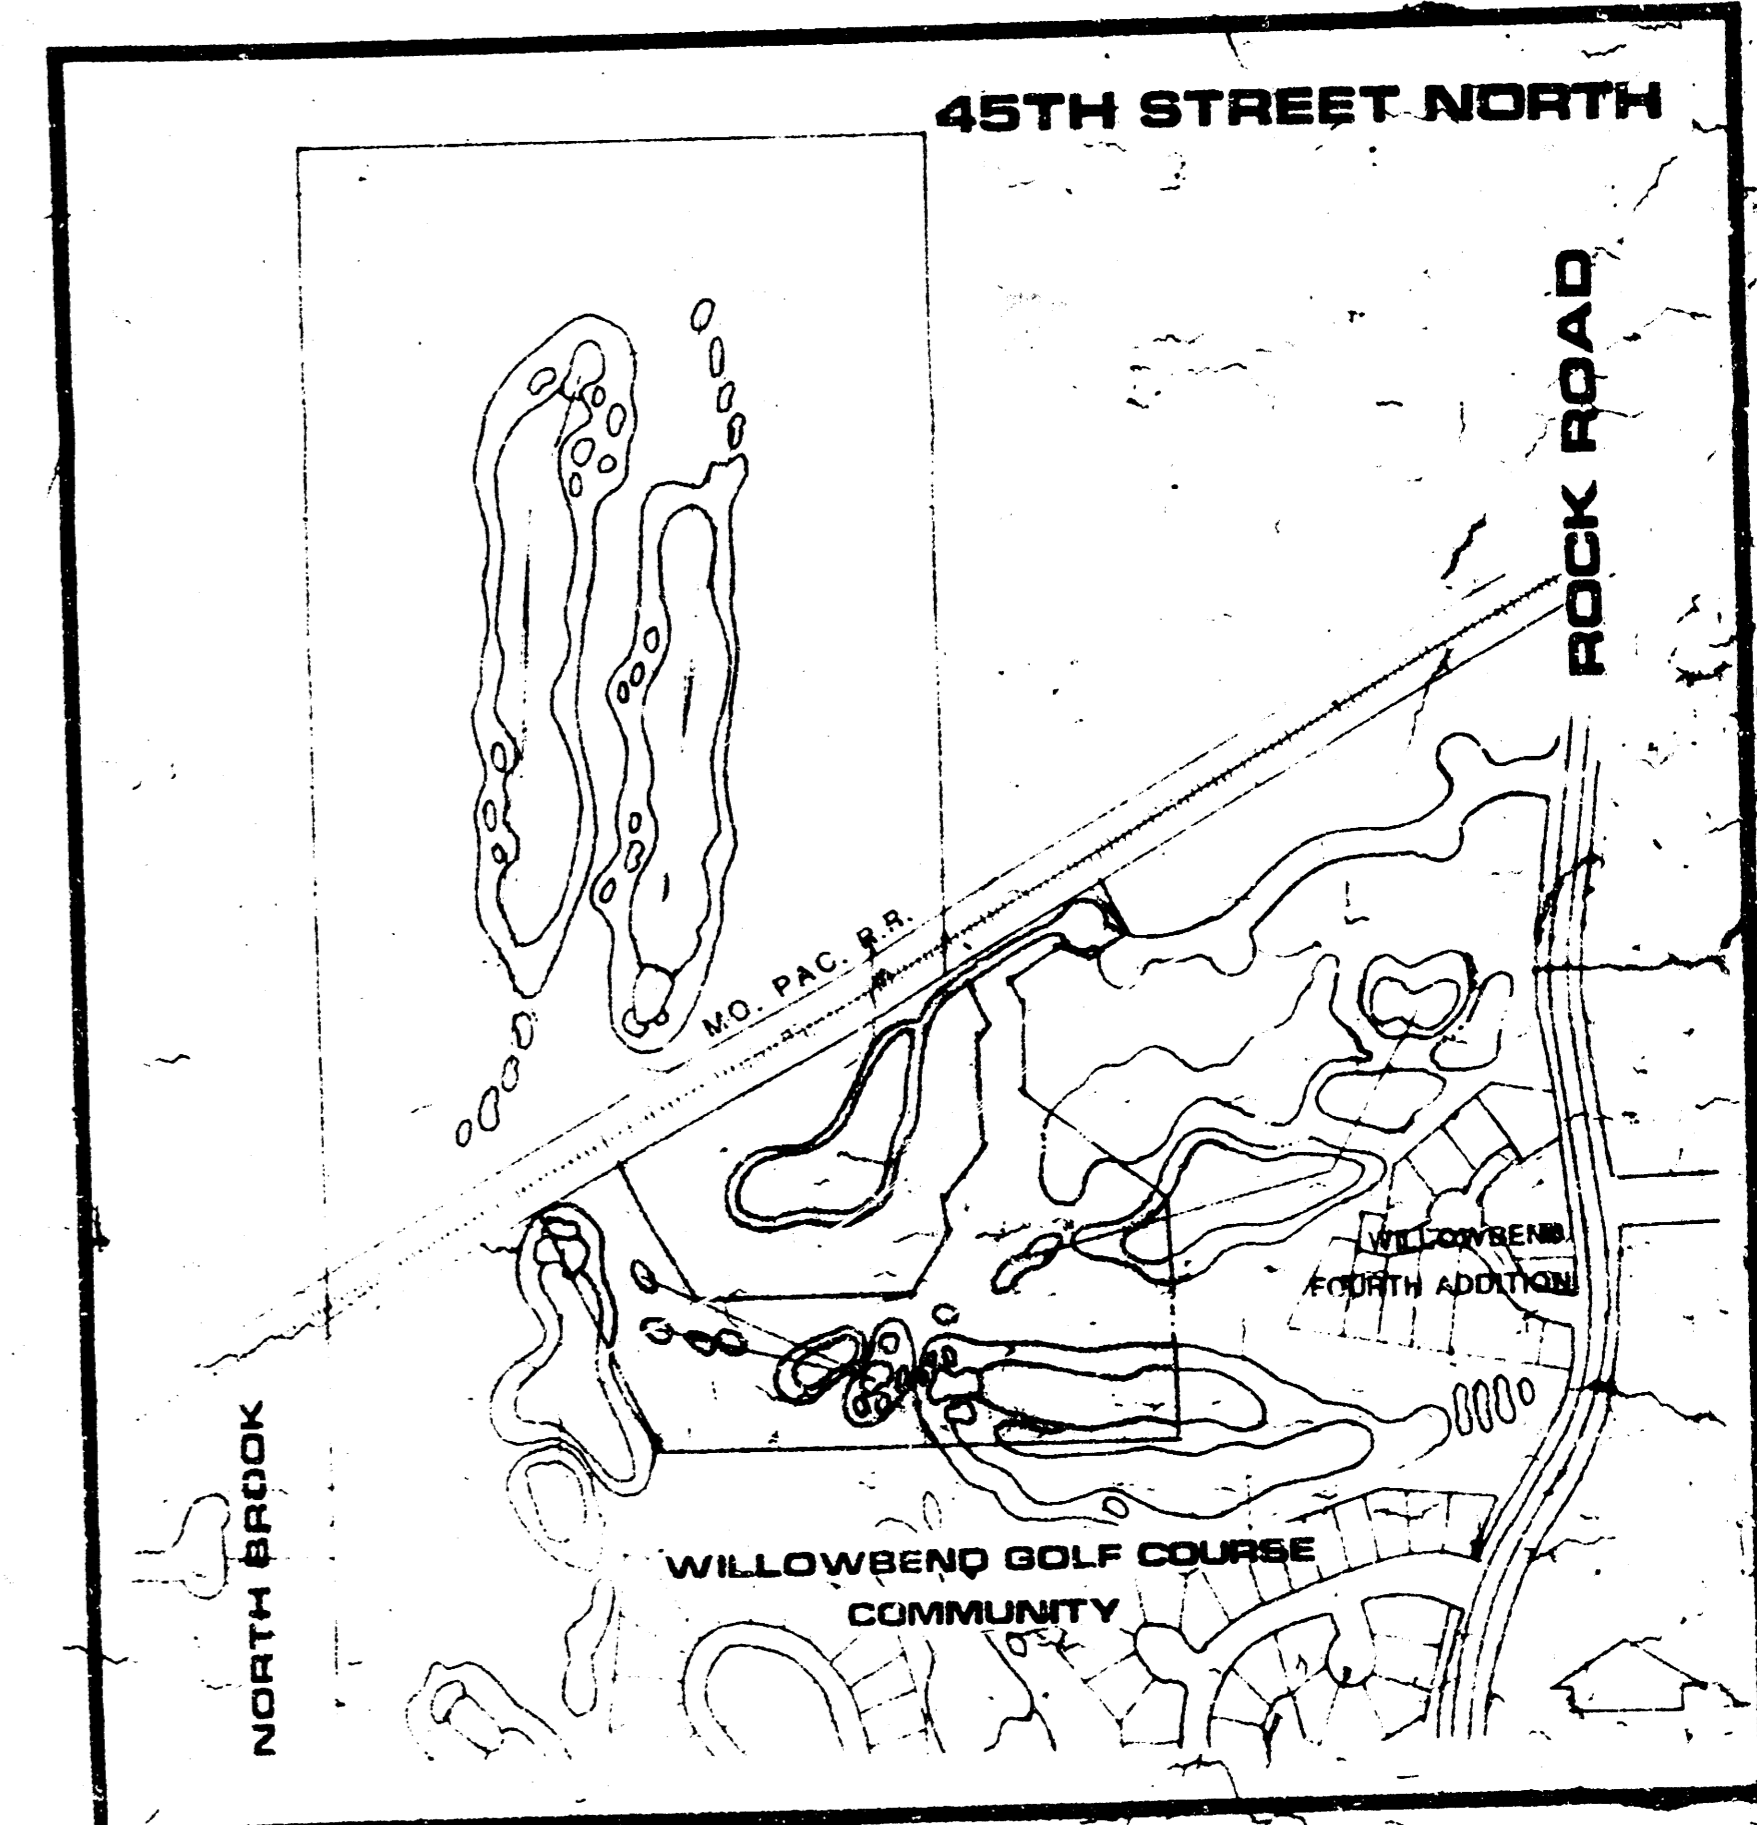

**LOCATION MAP**

SCALE: 1" = 400'

M.P. = MIN. PAD REQUIRED FOR LOTS 1-25, BLOCK I

DRAINAGE AREA	AREA (ACRES)	PERCENT	C (100YR)	T (C)	Q (100YR)	Q (2YR)	Q (100YR)	PIPE SIZE	PIPE SLOPE	INLET TYPE
A	0.70	0.70	15.00	3.83	7.77	1.83	4.50	15" RCP	0.44%	2L(1)-5
B	0.70	0.70	15.00	3.83	7.77	2.10	5.50			1L(1)-5
C	0.87	0.87	15.00	3.83	7.77	1.90	5.47			2L(1)-10
B & C	1.57	0.70	15.00	3.83	7.77	4.00	10.05	24" RCP	0.56%	2L(1)-10
D	1.48	0.70	15.00	3.83	7.77	5.50	0.15			
E	1.70	0.70	15.00	3.83	7.77	3.71	0.00			
D & E	3.18	0.70	15.00	3.83	7.77	6.47	18.05			
A TOTAL	0.70	0.70	15.00	3.83	7.77	12.00	50.00	30" RCP	0.30%	2L(1)-10

**SKETCH PLAN FOR WILLOBEND SEVENTH ADDITION**

**MK EC**

MID-KANSAS ENGINEERING CONSULTANTS PA  
 3500 NORTH ROCK ROAD  
 BUILDING 1800  
 WICHITA, KANSAS 67226  
 636-5566

**N**  
**W** **E**  
**S**

SCALE: 1" = 50'  
 CONTOUR INTERVAL: 1'