




BENCHMARK:
 CITY DISC - 34.3' E. & 3.3' N. OF S.W. CORNER OF
 N.W. 1/4, SEC. 21, T-27-S, R-2-W. ELEV. = 156.63
 CITY DATUM (134.03 M.S.L.)

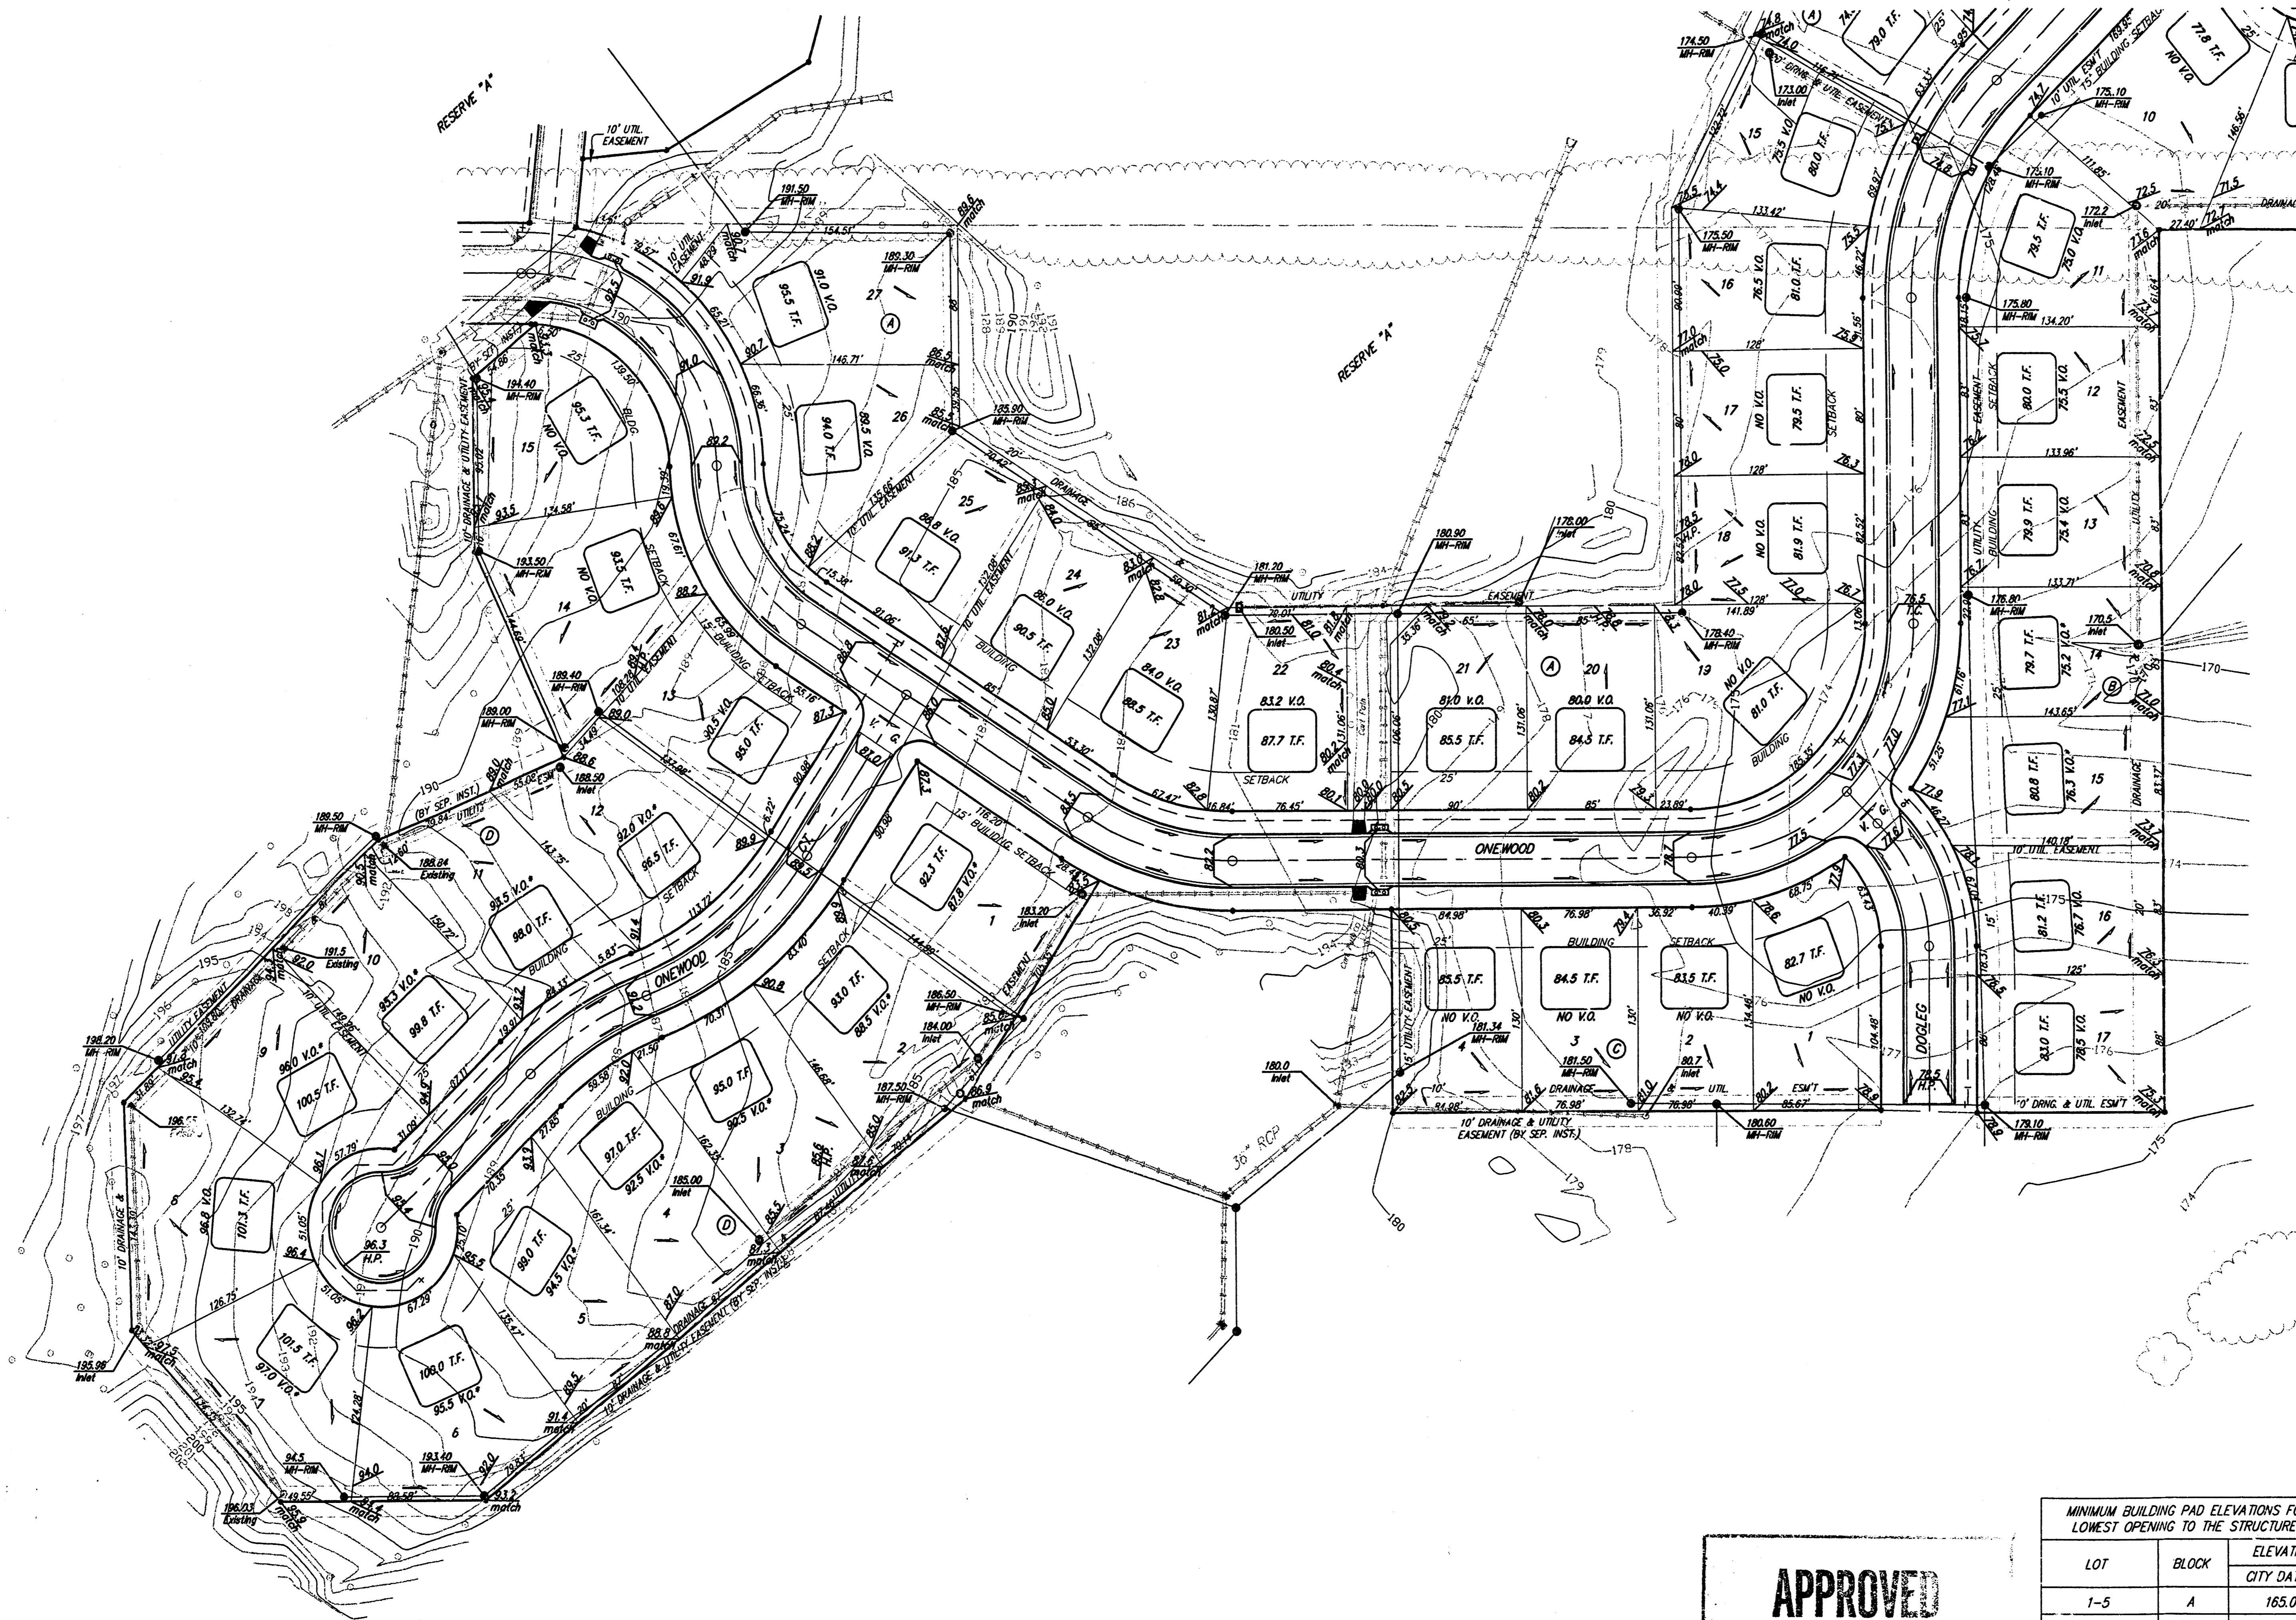

SCALE: 1" = 60'
 • = IRON

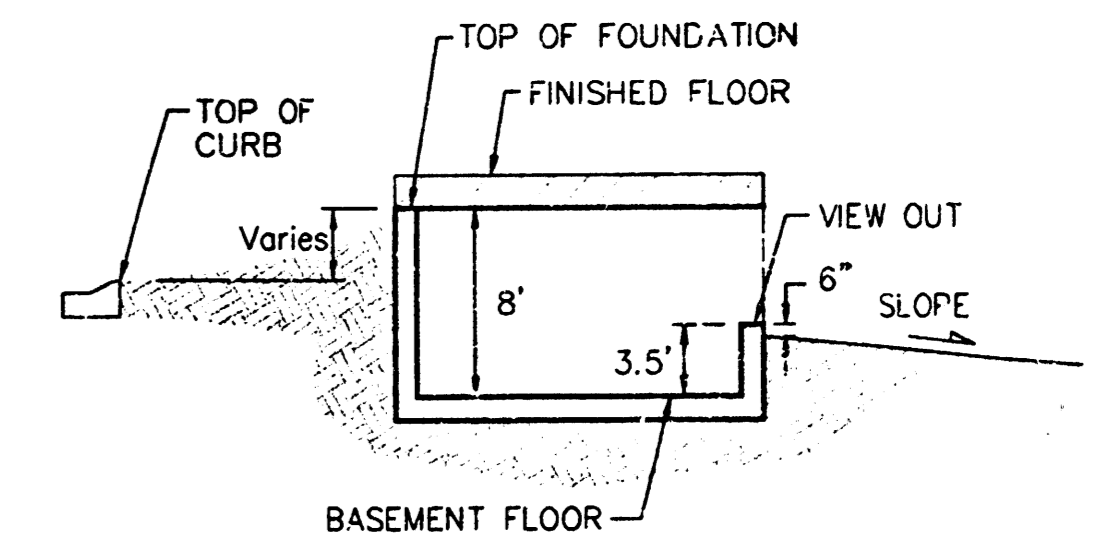

TYPICAL VIEW OUT
 NO SCALE

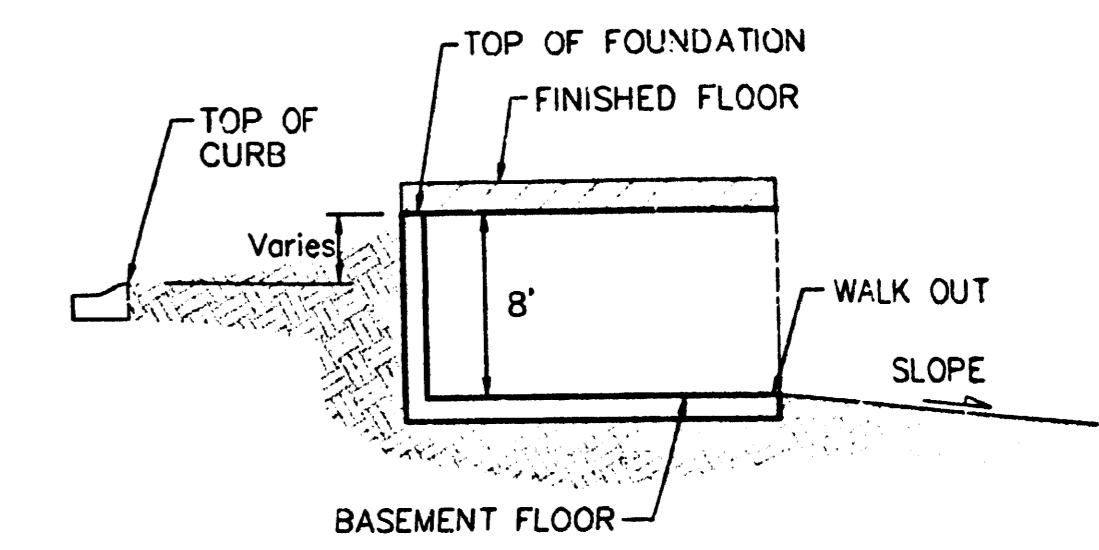

TYPICAL WALK OUT
 NO SCALE

NOTES:

A master grading plan for drainage has been developed for the subdivision and is on file with the City of Wichita, Kansas. Construction of residential structures must follow the master site grading plan elevations which are higher than the minimum pad requirement.

All drainage easements, rights-of-way, or reserves shall remain at established grades or as modified with the approval of the City Engineer of the City of Wichita, Kansas. No obstructions which impede the flow of this drainage system shall be allowed.

Proposed top of foundation elevations are shown on plans. contractor to set finished floor elevations.

All street elevations shown on plans are for top of curb (full-height). Typically roll-type curbs are constructed. Deduct 0.25' from top of curb (full-height).

This Grading Plan is designed with View-Out and Walk-Out Basements. Elevations shown at Rear of House (XX.X V.O. and XX.X W.O.) are for minimum opening.

All elevations shown on plans are City of Wichita Datum.

* Requires extra-deep foundation.

**APPROVED
 DRAINAGE PLAN**

LOT	BLOCK	ELEVATION CITY DATUM
1-5	A	165.0
6	A	166.0
7	A	167.0
8-11	A	169.0
12	A	171.0
13	A	173.0
14-16	A	175.0


**AUBURN HILLS 13TH ADDITION
 GRADING PLAN
 WICHITA, KANSAS**

BAUGHMAN COMPANY P.A.
 ENGINEERING, SURVEYING, & PLANNING
 316-262-7271 • 316 ELLIS • WICHITA, KANSAS 67211


PROJECT NUMBER: _____ SHEET: **1** OF **2**

DESIGN: BLC/BLP DRAWN: JAK/AEG APPROVED: _____ DATE: 8/22/01 SCALE: 1" = 60'


BENCHMARK:
 CITY DISC- 34.3' E. & 3.3' N. OF S.W. CORNER OF
 N.W. 1/4, SEC. 25, T-27-S, R-2-W. ELEV=156.63
 CITY DATUM(1344.03 M.S.L.)

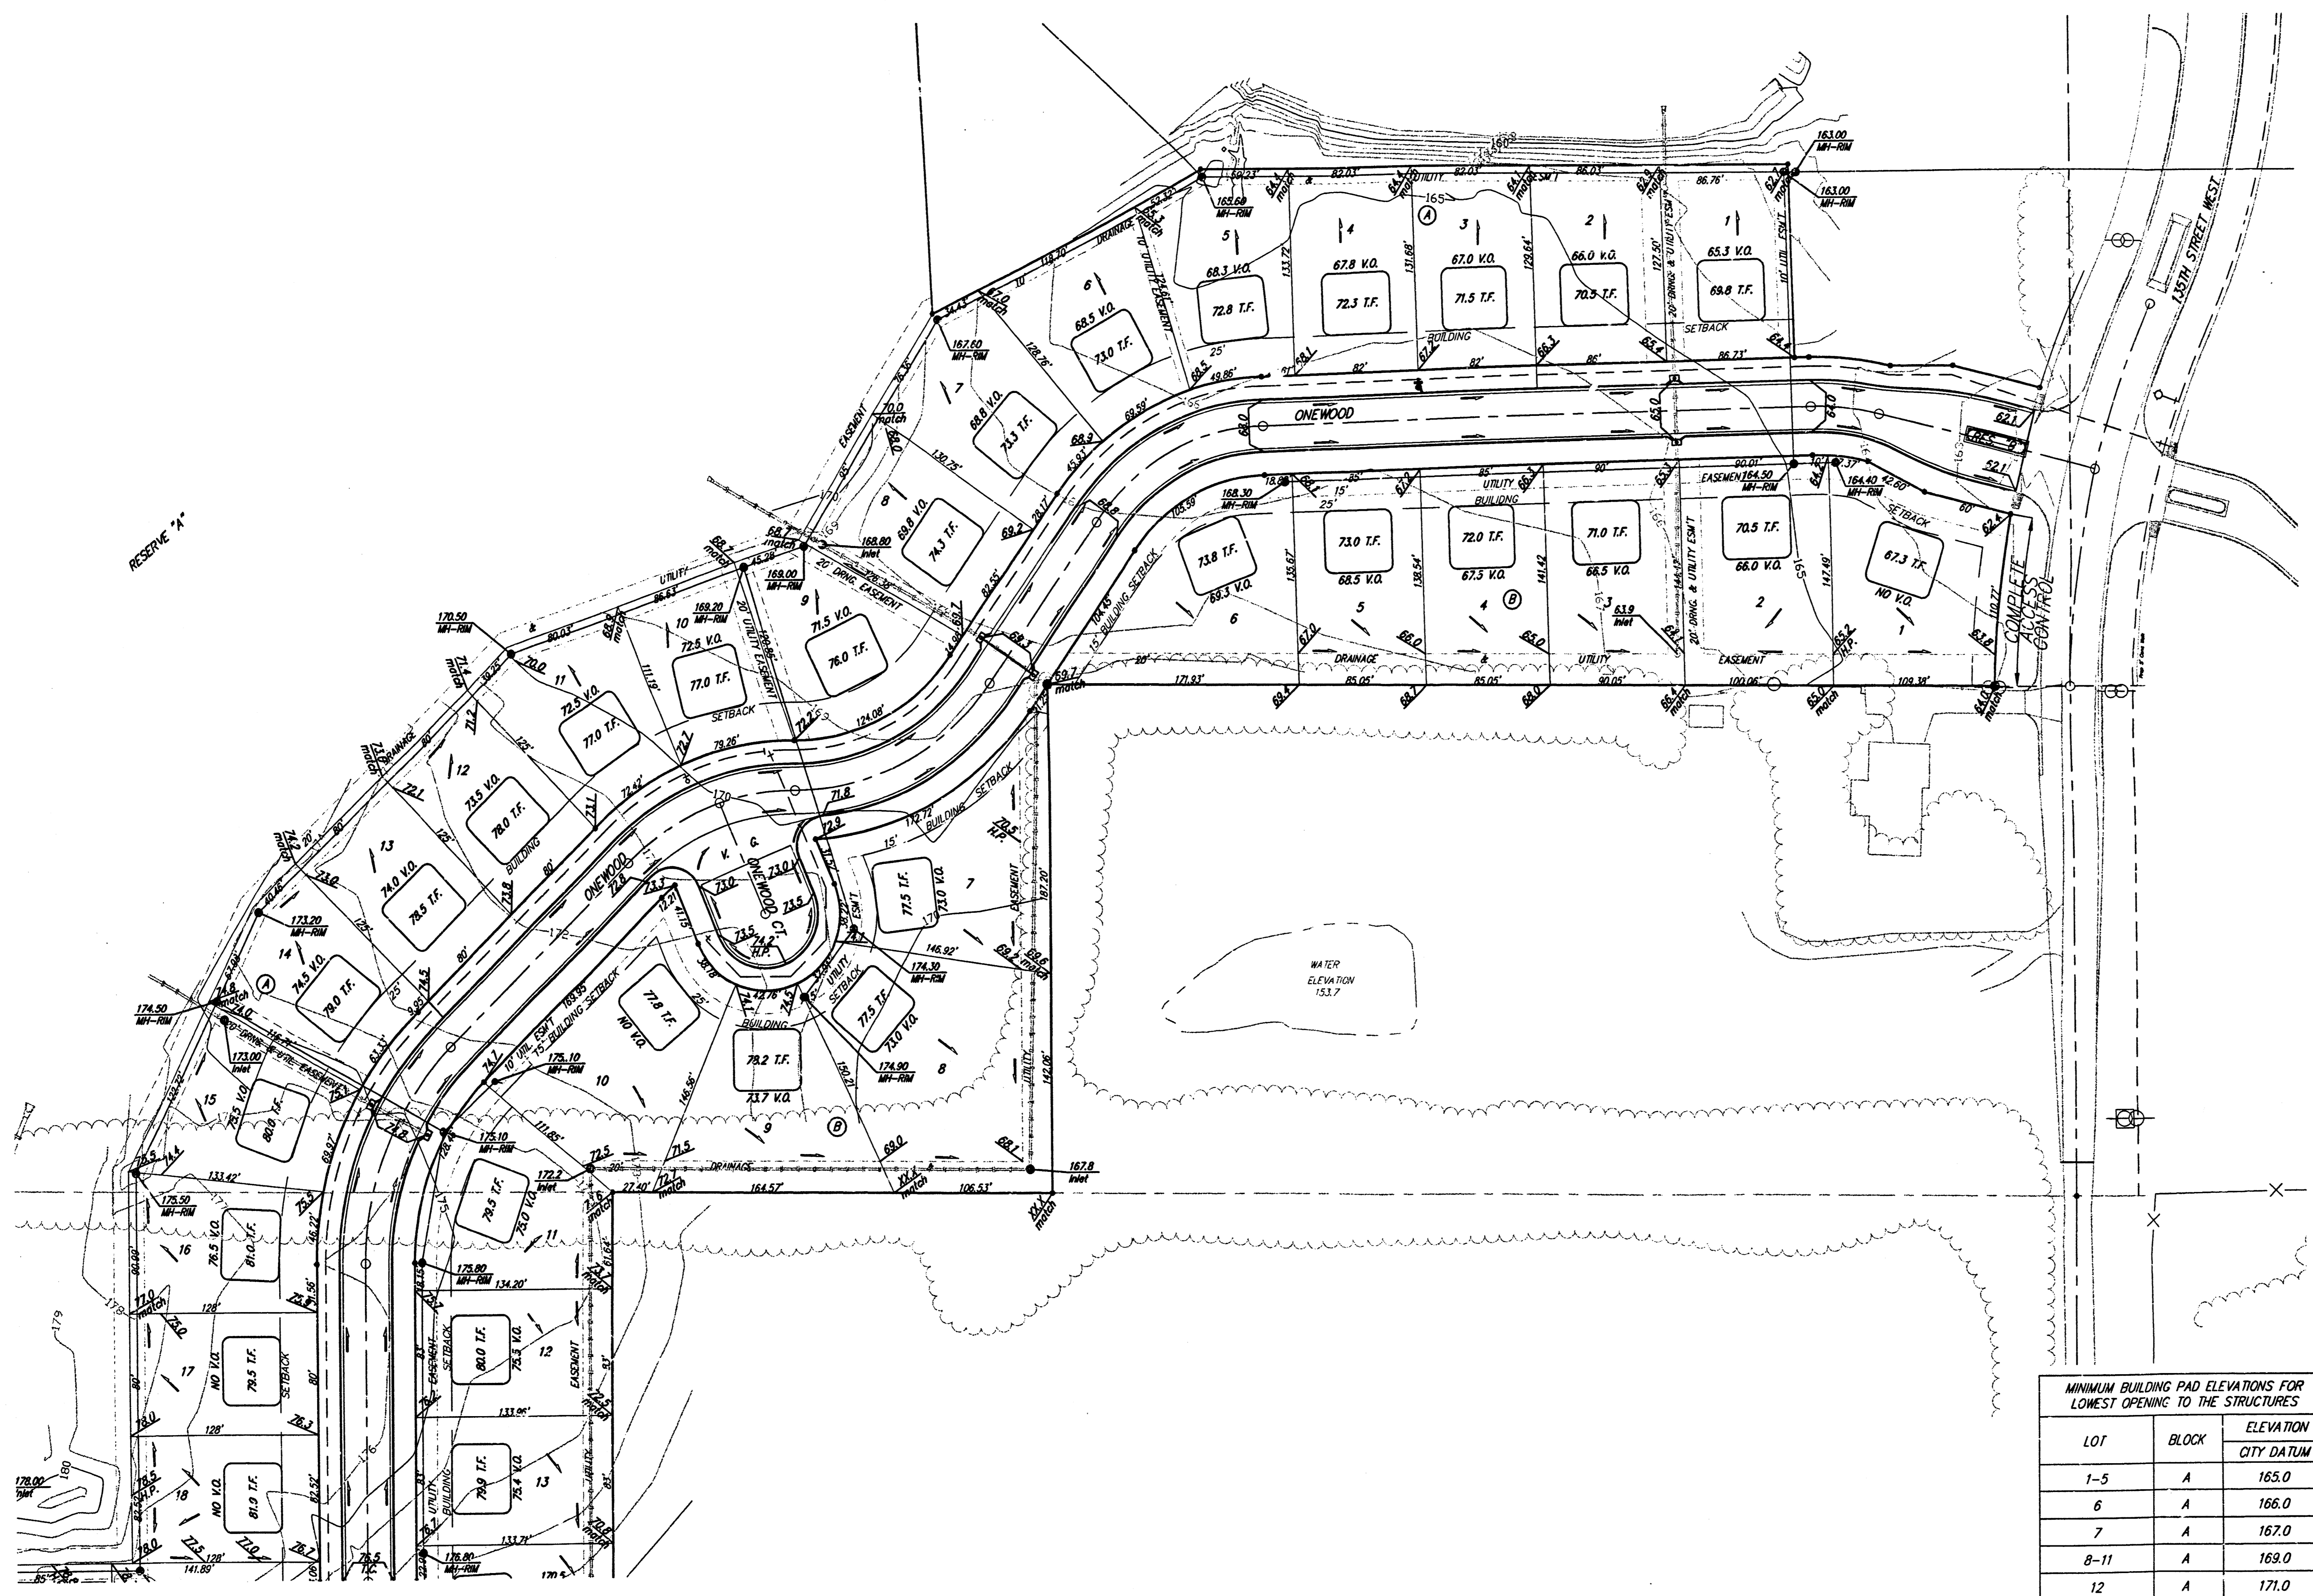

SCALE: 1" = 60'
 • = IRON

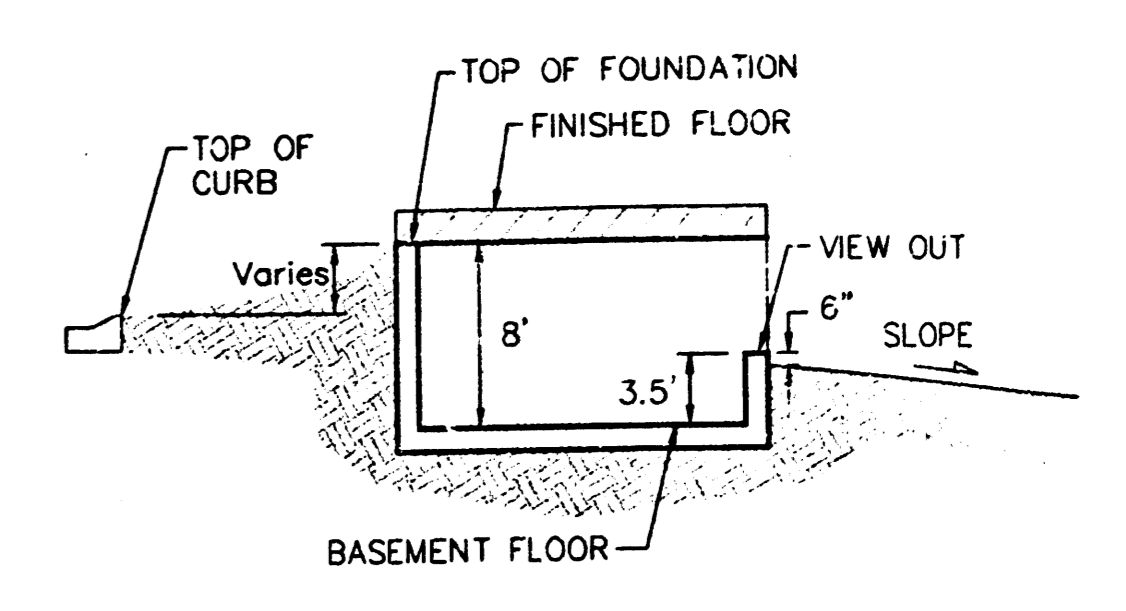

TYPICAL VIEW OUT
 NO SCALE

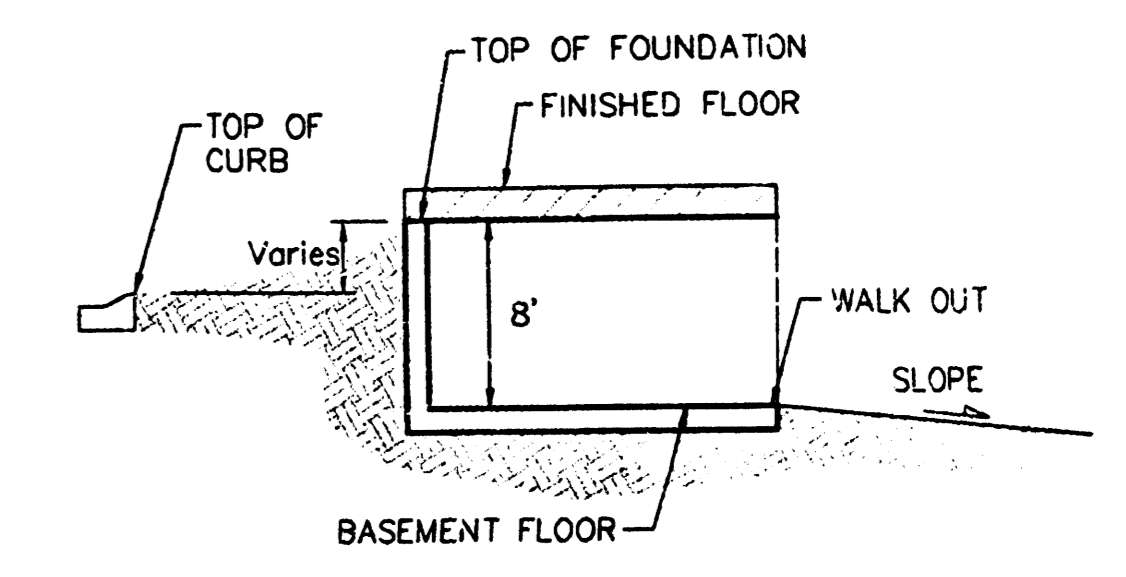

TYPICAL WALK OUT
 NO SCALE

NOTES:

A master grading plan for drainage has been developed for the subdivision and is on file with the City of Wichita, Kansas. Construction of residential structures must follow the master site grading plan elevations which are higher than the minimum pad requirement.

All drainage easements, right-of-way, or reserves shall remain at established grades or as modified with the approval of the City Engineer of the City of Wichita, Kansas. No obstructions which impede the flow of this drainage system shall be allowed.

Proposed top of foundation elevations are shown on plans. Contractor to set finished floor elevations.

All street elevations shown on plans are: or top of curb (full-height). Typically roll-type curbs are constructed. Deduct 0.25' from top of curb (full-height).

This Grading Plan is designed with View-Out and Walk-Out Basements. Elevations shown at Rear of House (XX.X V.O. and XX.X W.O.) are for minimum opening.

All elevations shown on plans are City of Wichita Datum.

* Requires extra-deep foundation.

MINIMUM BUILDING PAD ELEVATIONS FOR LOWEST OPENING TO THE STRUCTURES

LOT	BLOCK	ELEVATION CITY DATUM
1-5	A	165.0
6	A	166.0
7	A	167.0
8-11	A	169.0
12	A	171.0
13	A	173.0
14-16	A	175.0

AUBURN HILLS 13TH ADDITION
GRADING PLAN
 WICHITA, KANSAS

BAUGHMAN COMPANY P.A.
 ENGINEERING, SURVEYING, & PLANNING
 318-262-7271 • 318 ELLIS • WICHITA, KANSAS 67211

PROJECT NUMBER: _____ SHEET: **2** OF **2**

DESIGN: BLG/BLP DRAWN: JAK/AEG APPROVED: _____ DATE: 8/22/01 SCALE: 1" = 60'