


BENCH MARKS:

HEADBOLT BETWEEN "MUELLEE" AND "CHATTANOOGA" ON FIRE
HYDRANT @ NW COR. WATERMAN AND WICHITA, ELEV. 111.56

7" IN CONC. PVT. ON E WICHITA, STA. 3+50, ELEV. 110.28

SCALE 1" = 20'

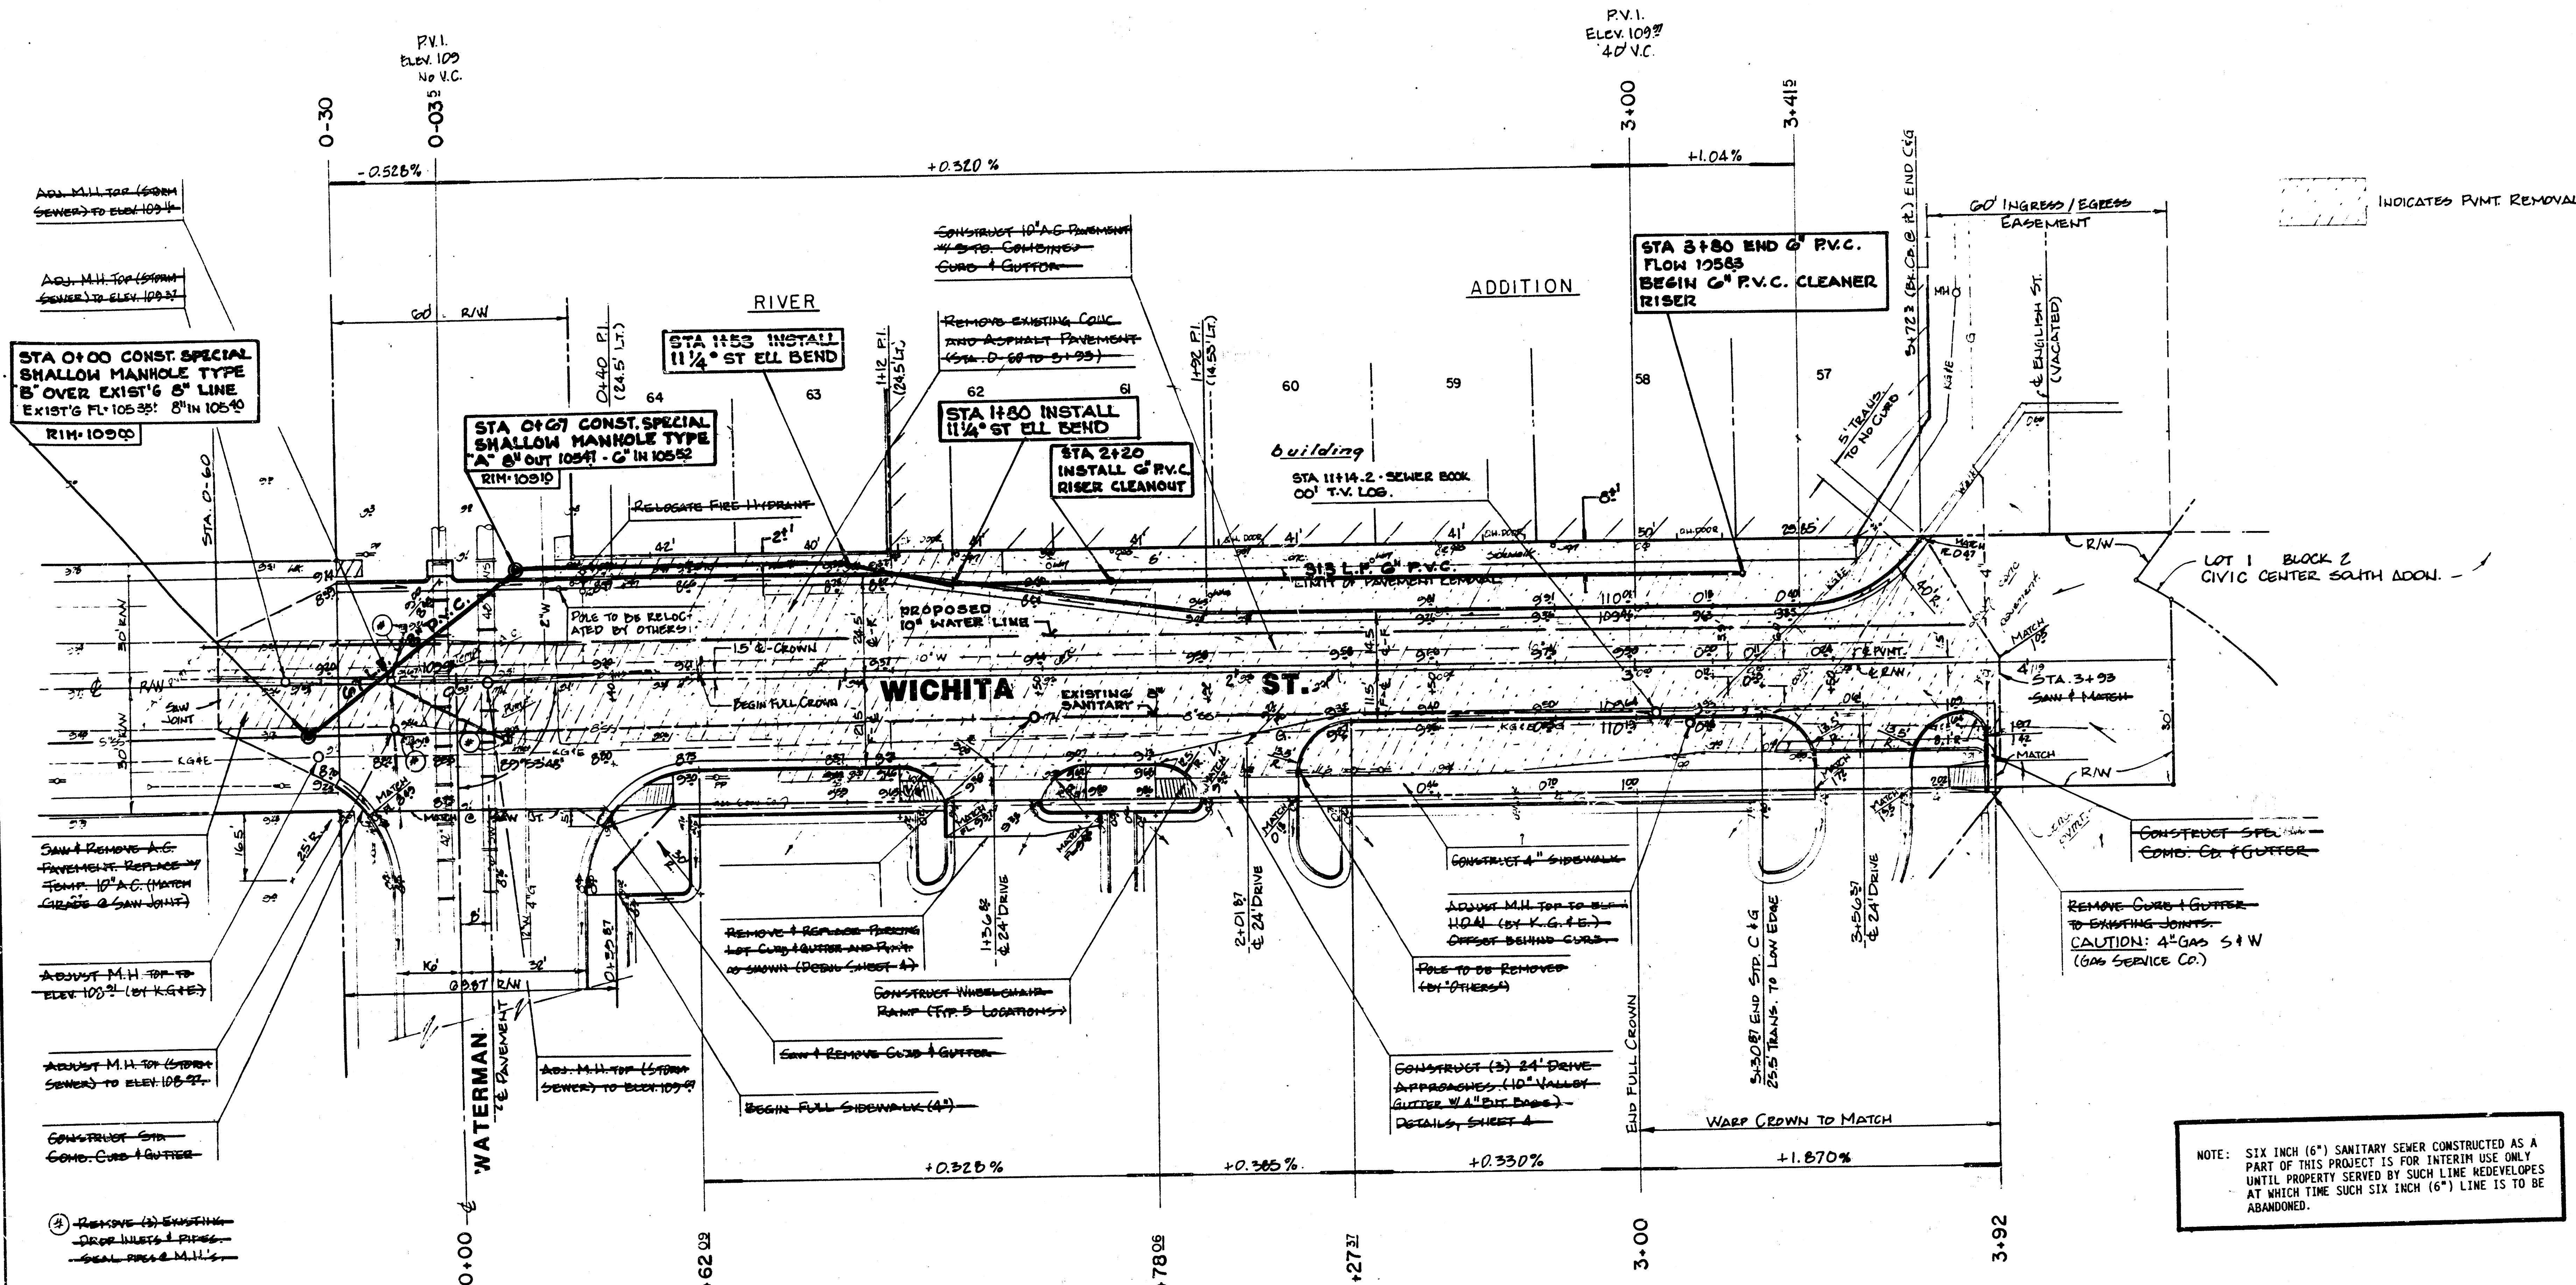


GENERAL NOTES

1. PRICE BID PER LINEAL FOOT OF 6" OR 8" R.V.C. SHALL INCLUDE THE COST OF ALL MATERIAL, LABOR, EQUIPMENT, EXCAVATION, BACKFILLING AND OTHER INCIDENTALS NECESSARY TO COMPLETE THE WORK.
2. CLEANOUTS SHALL BE MEASURED AND PAID FOR AS LINEAL FEET OF 6" R.V.C.
3. ONLY ACTIVE BUILDING SEWER LINES WHICH CONNECT ACTUAL BUILDINGS TO THE SEWER SYSTEM ARE TO BE RECONNECTED TO THE NEW SEWER CONSTRUCTION. IT WILL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO ASCERTAIN WHICH BUILDING SEWER LINES AND/OR CONNECTIONS ARE ACTIVE AND WHICH SEWERS AND/OR CONNECTIONS HAVE BEEN ABANDONED.
4. CONTRACTOR TO CONTACT JERRY BLAINE 205-4210 FOR T.V. LOG OF EXISTING SEWER.


RECONSTRUCT A PORTION OF LATERAL N,
WEST SUBMAIN A, ON LEWIS, SANITARY
SEWER NO. 1

PROJECT NO.
468-76-245-81558-000-000-001


1/2 8/1

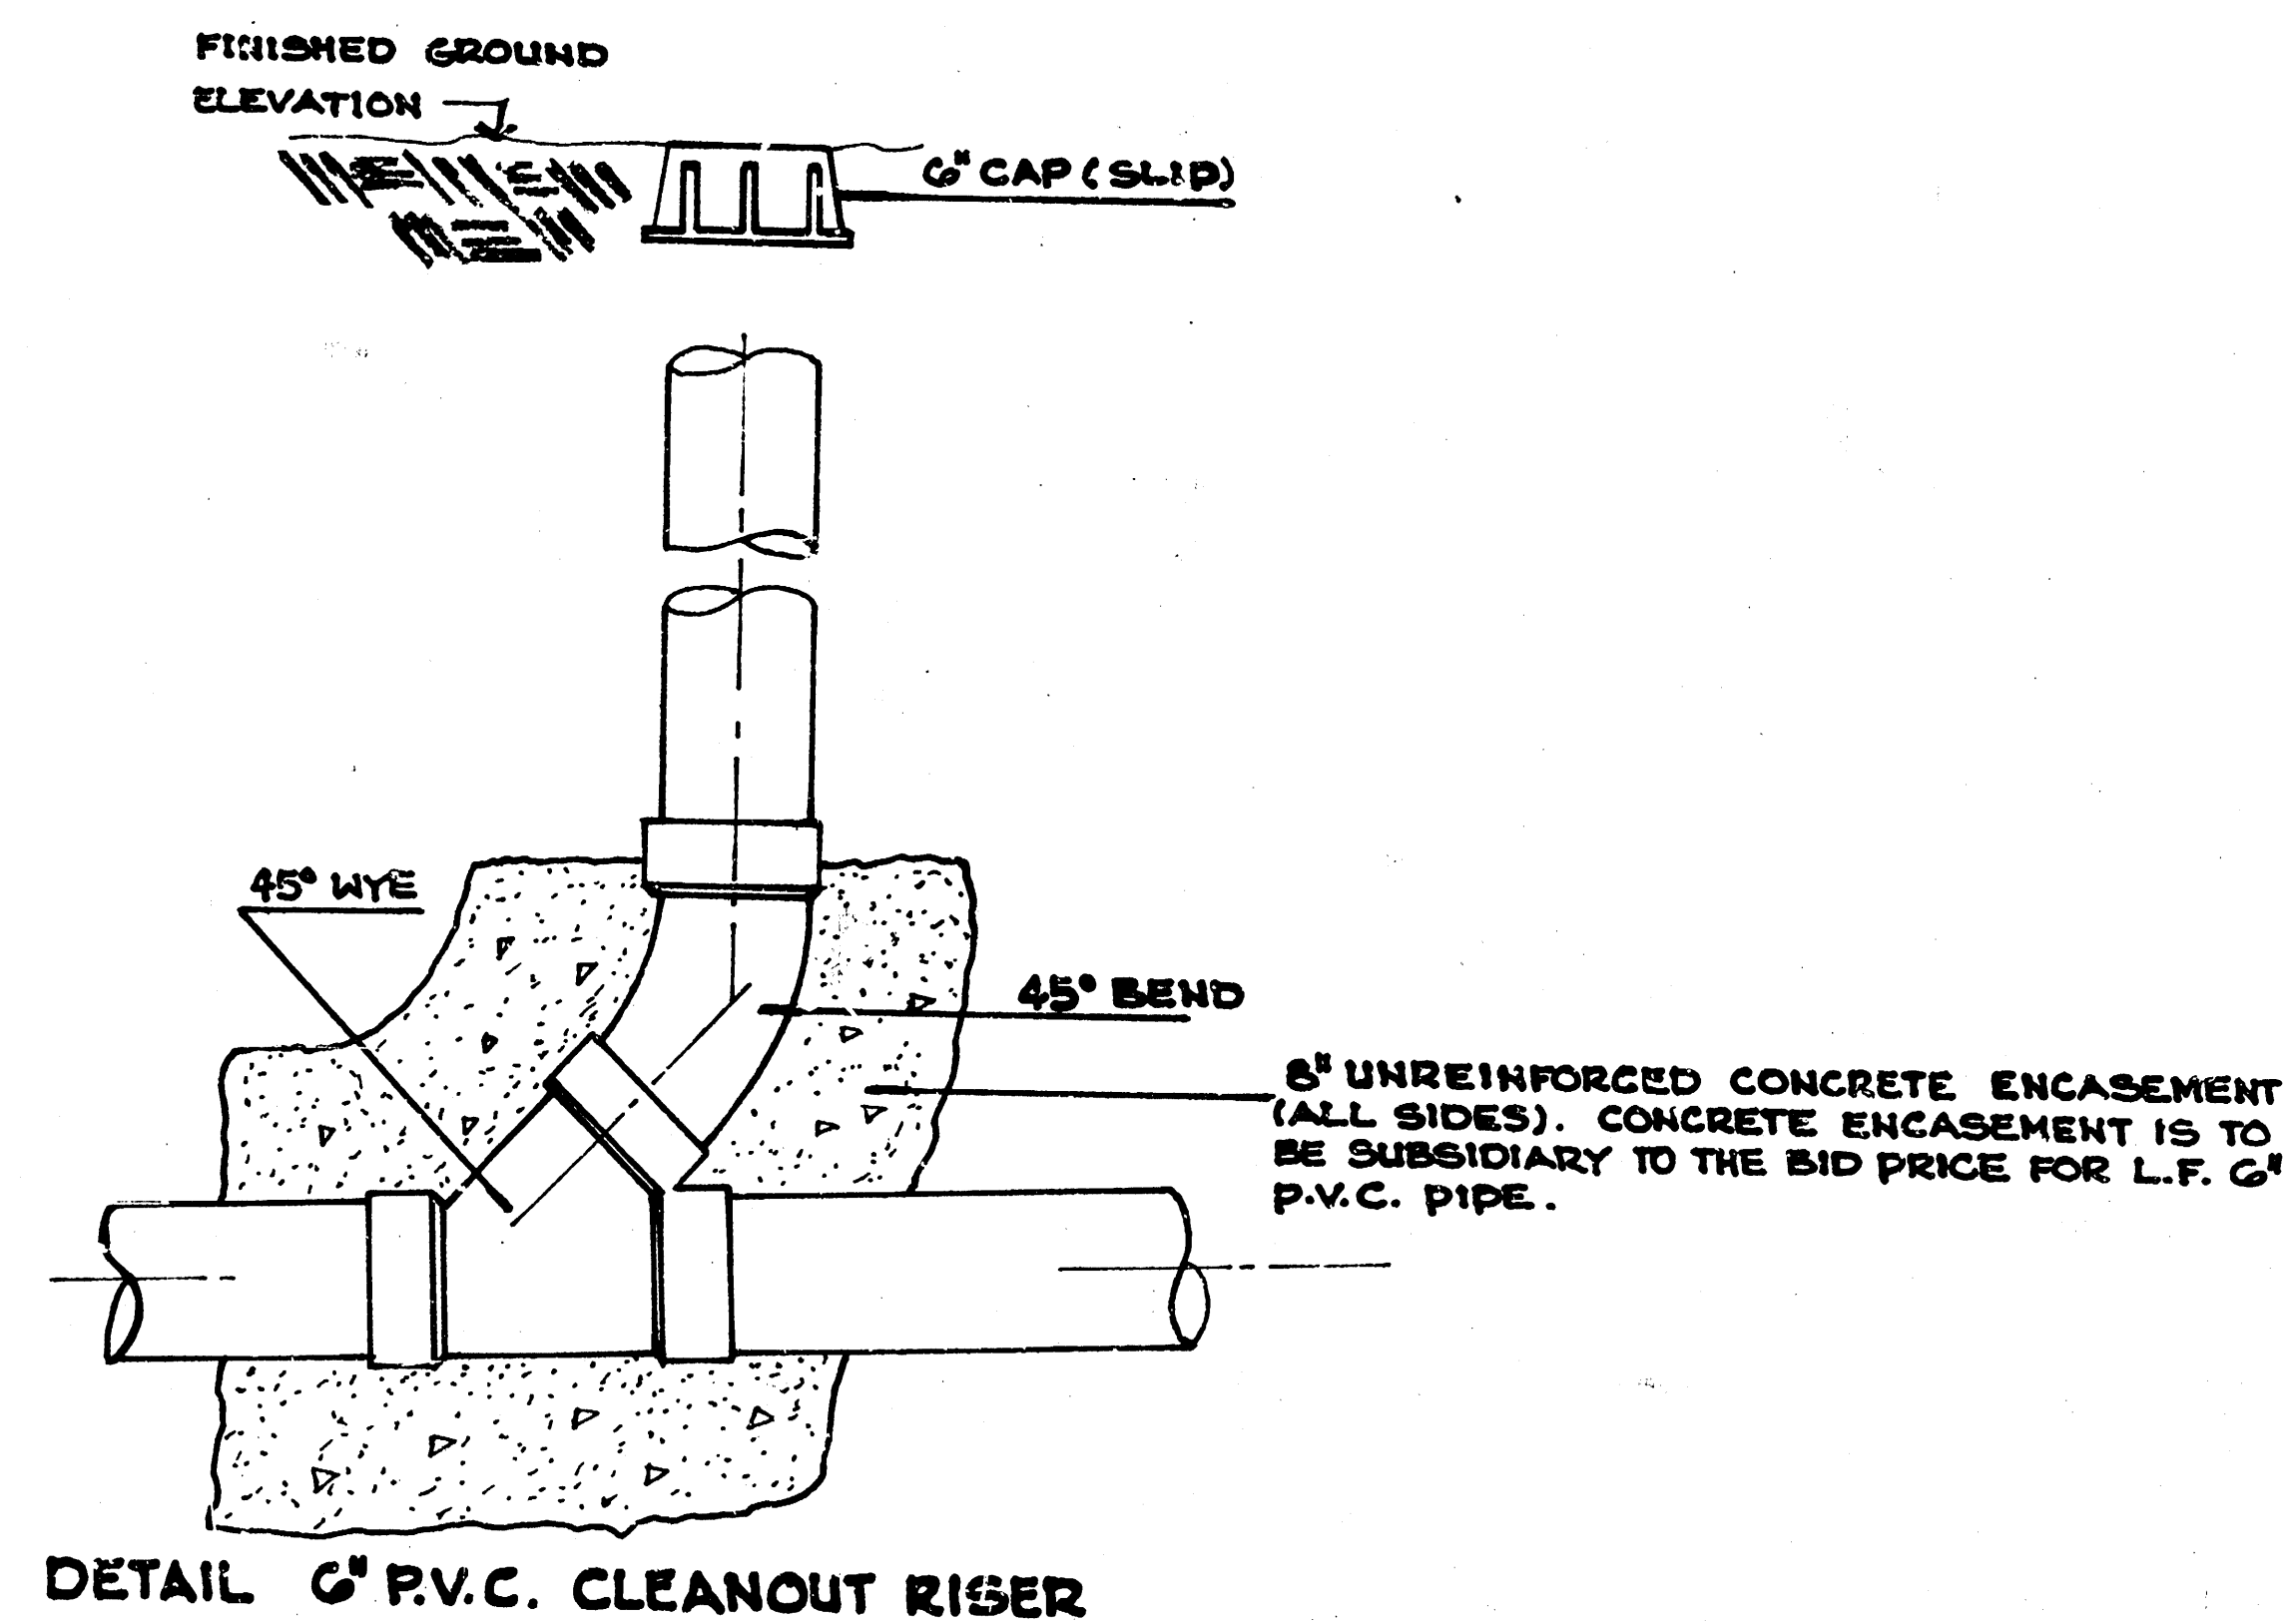

END OF PIPE TO BE TERMINATED AT THE END OF LAST SERVICE CONNECTION AND IS TO BE DETERMINED BY THE FIELD ENGINEER. (DO NOT INSTALL CAP IN DRIVEWAY).

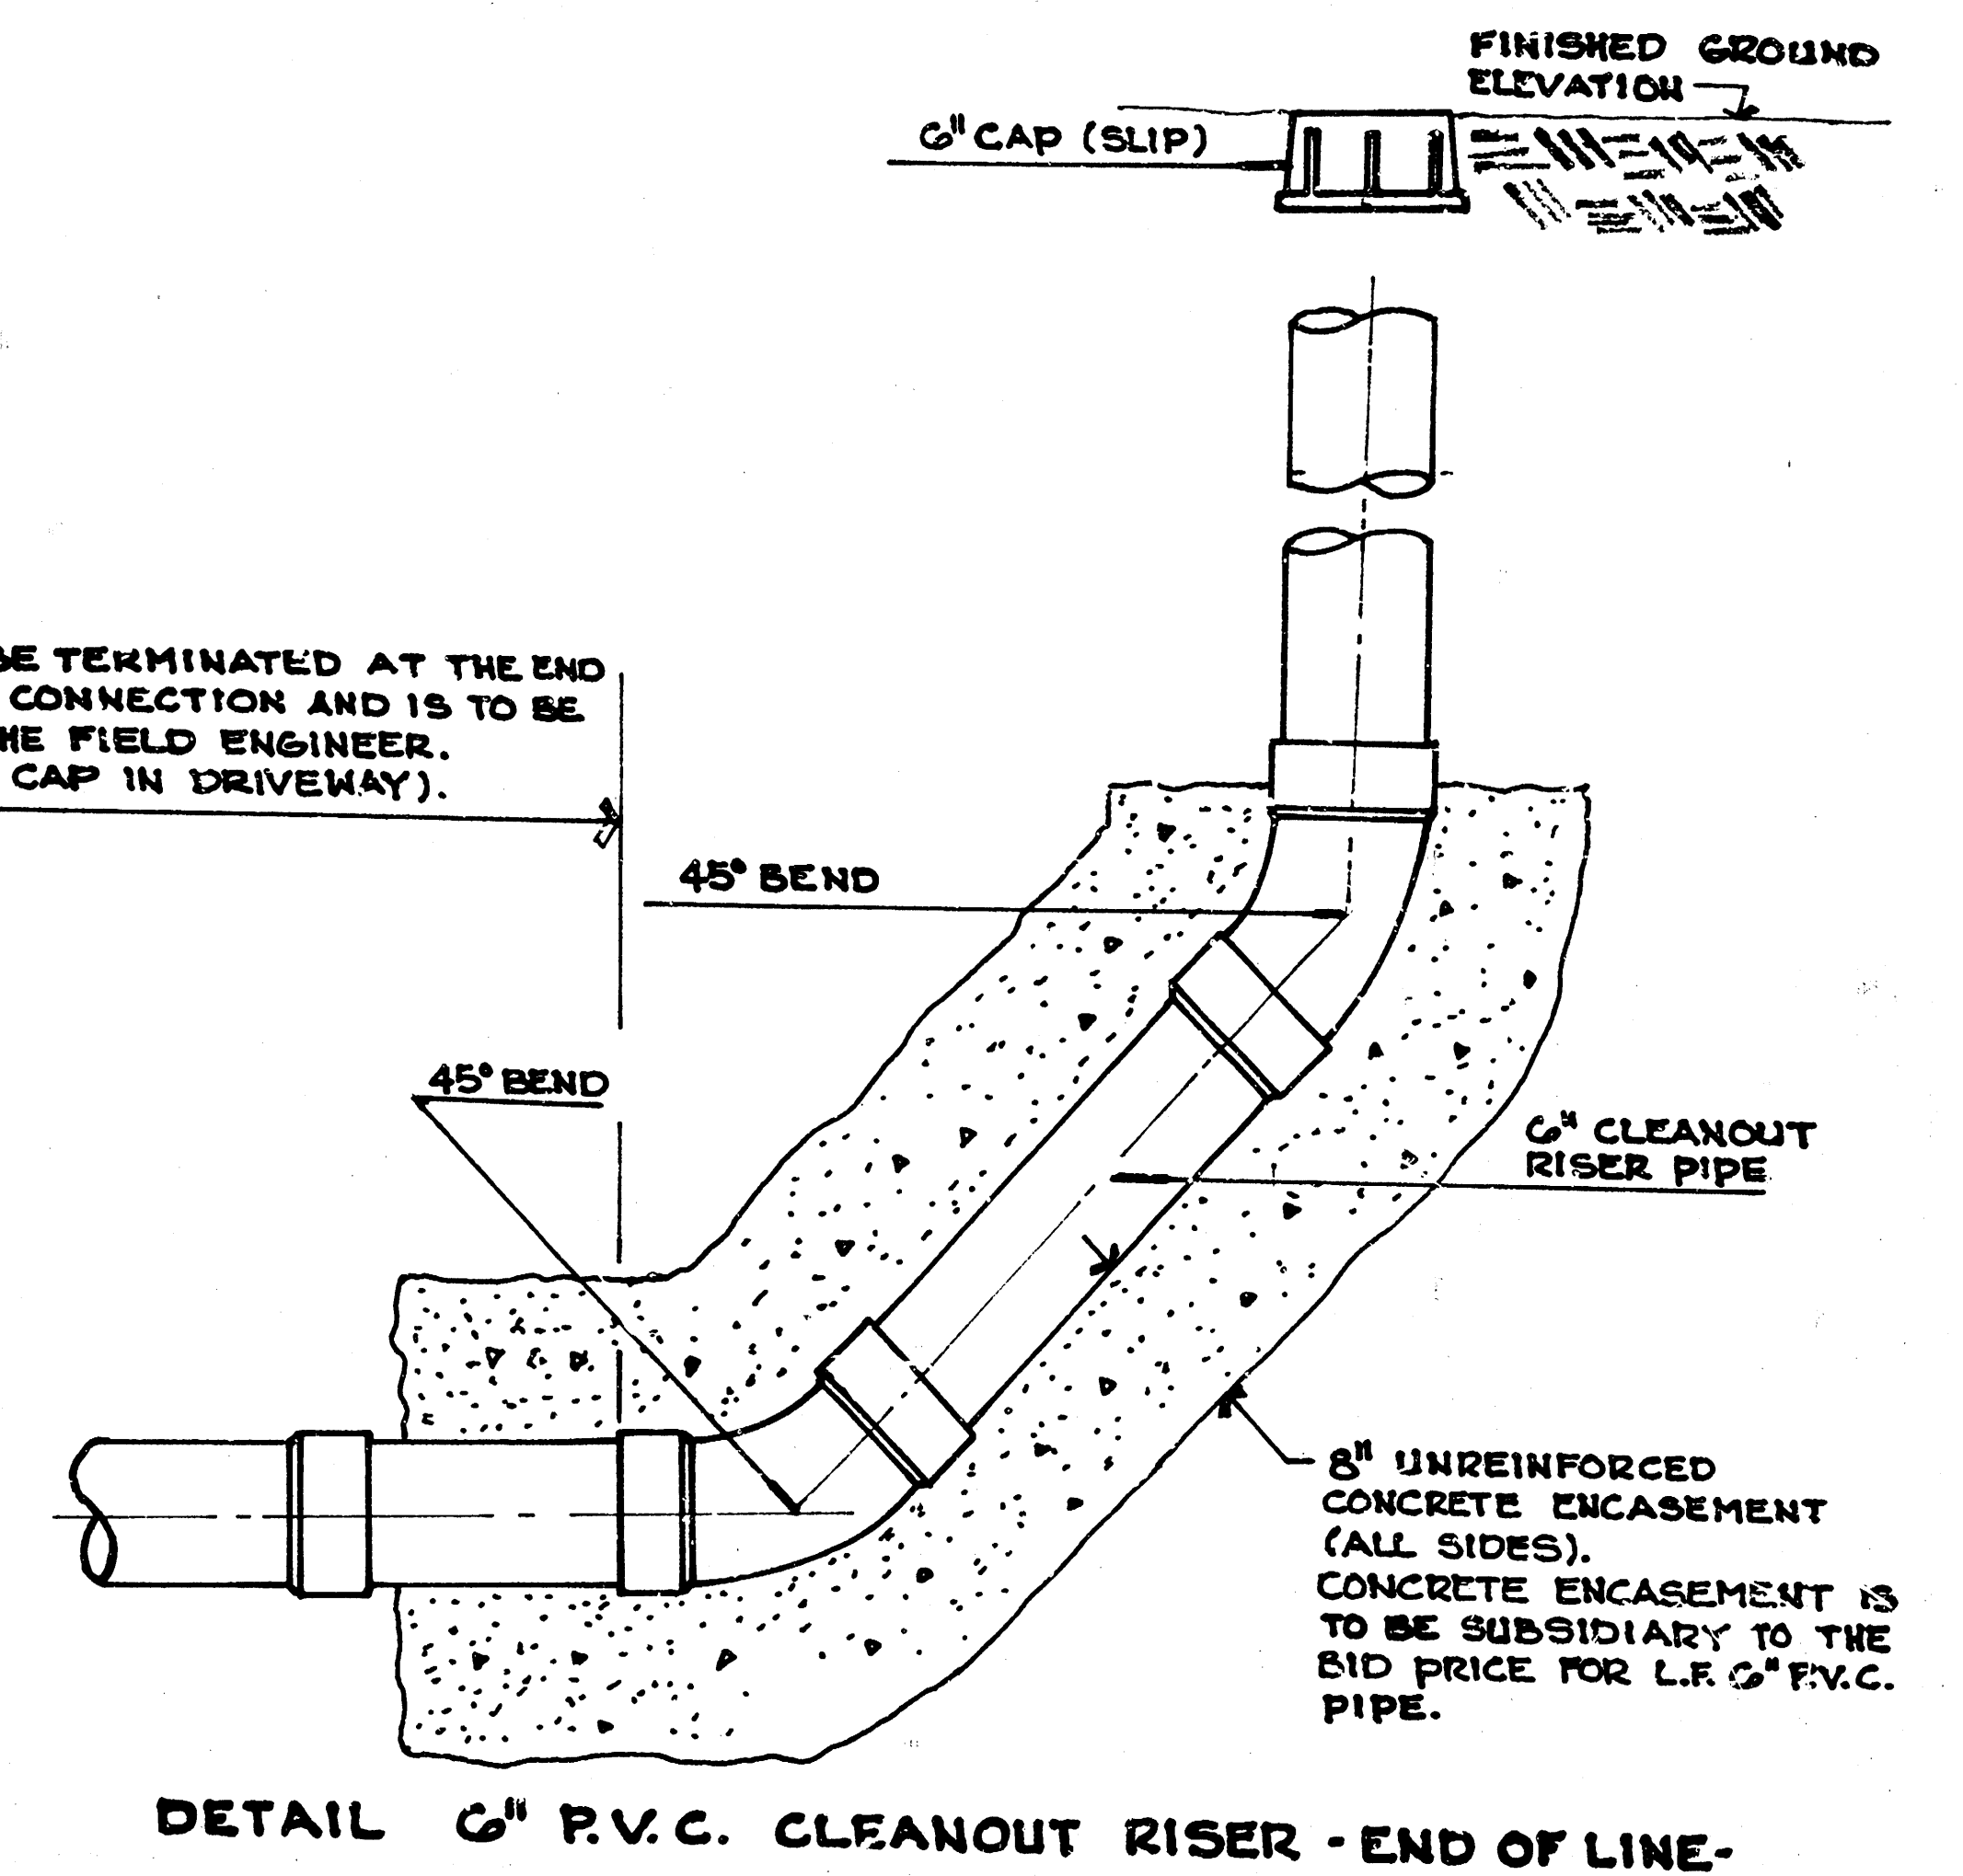

PROFILE SCALE
1" = 1' VERT.
1" = 20' HORIZ.

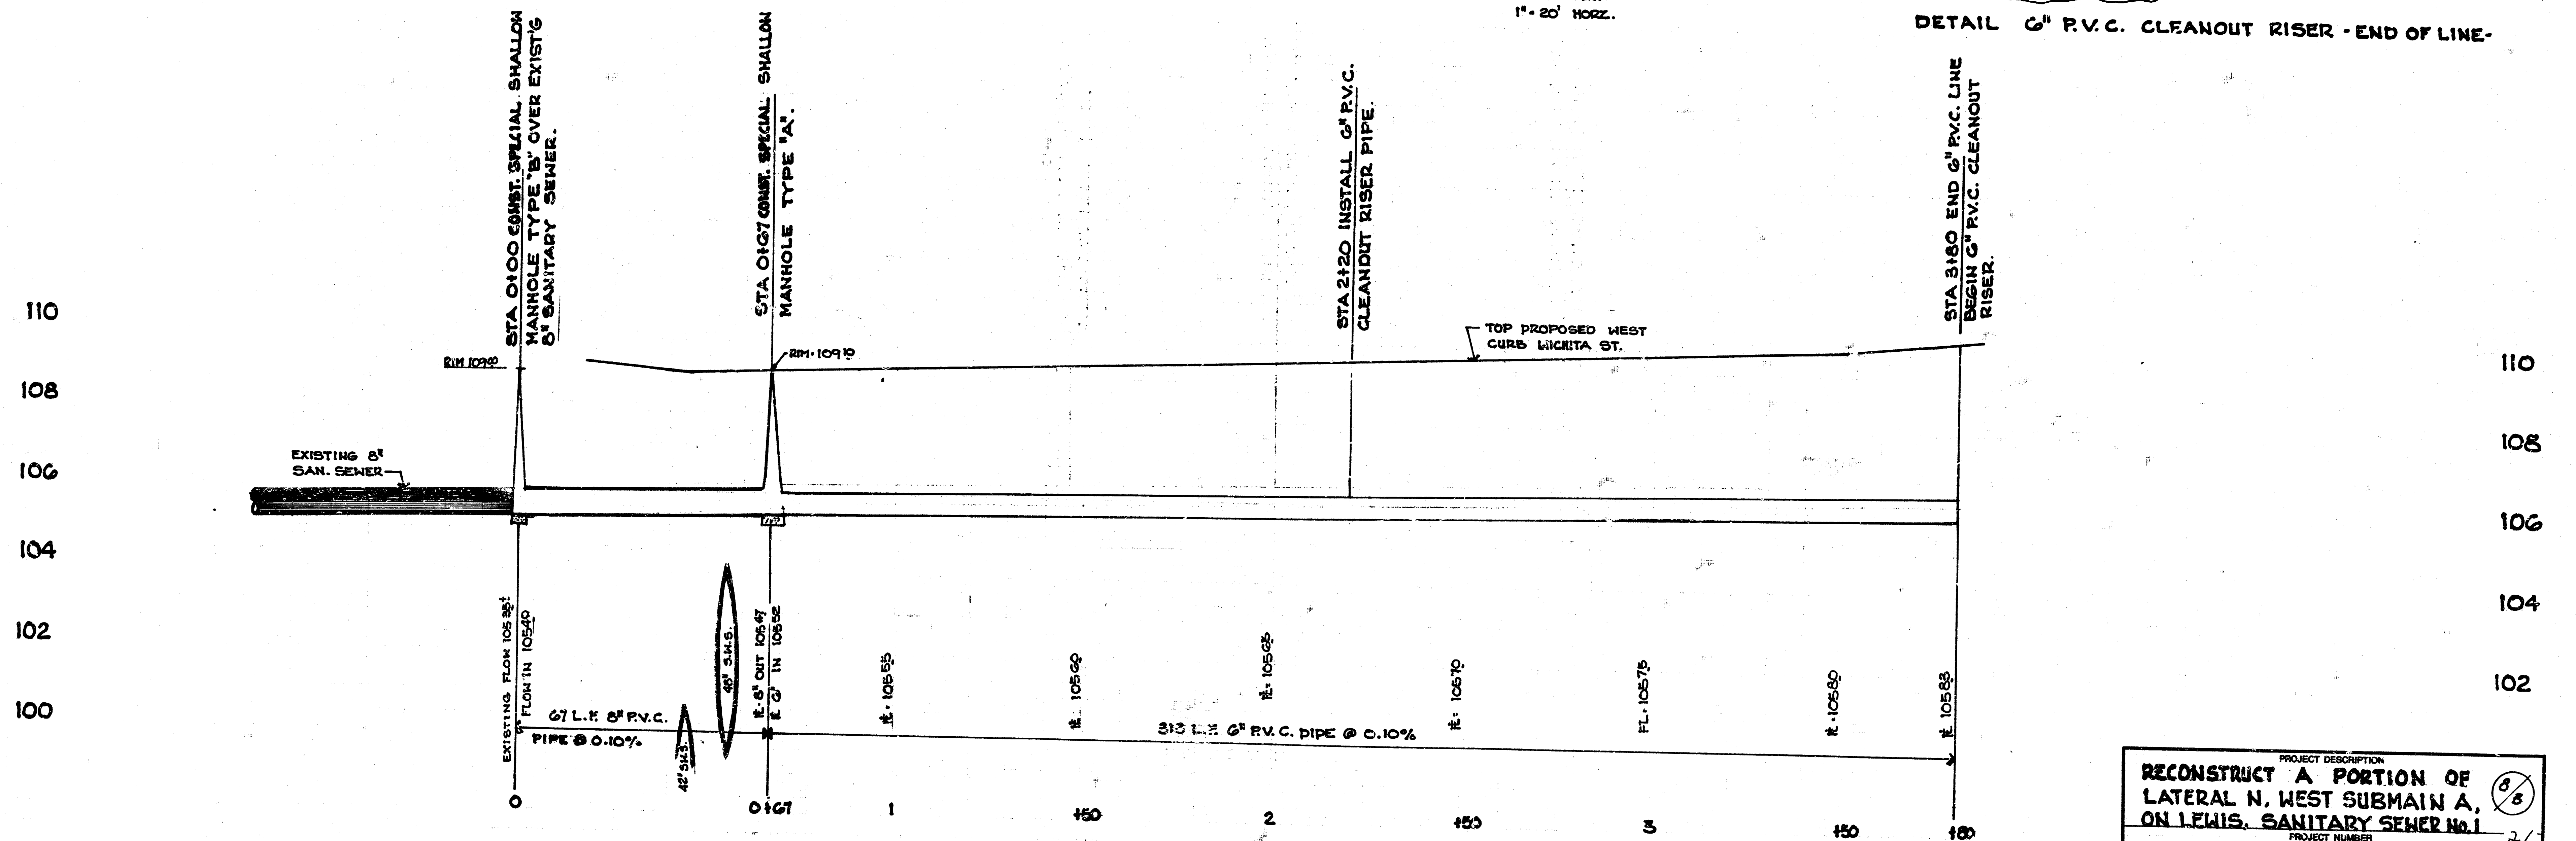

PROJECT DESCRIPTION
RECONSTRUCT A PORTION OF LATERAL N. WEST SUBMAIN A, ON LEWIS, SANITARY SEWER No. 1
PROJECT NUMBER
468-76-245-81555-000-000-001