




STATE	PROJECT NO.	YEAR	SHEET NO.	SHEETS
KANSAS	87 N-0190-01	2005	27	96

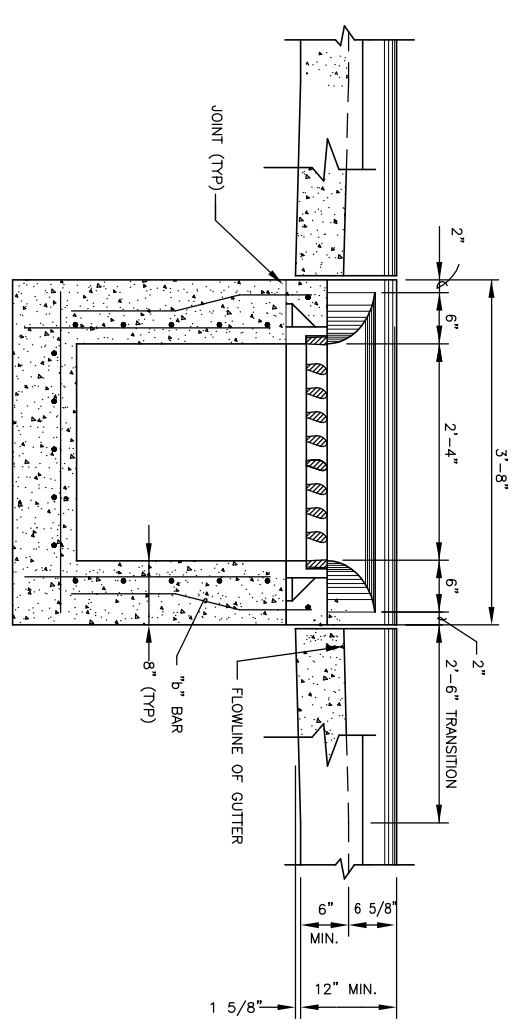

SECTION C - C

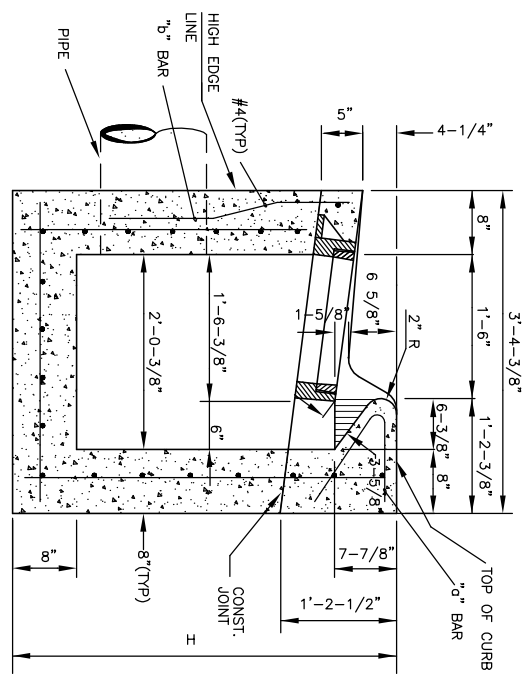

SECTION A - A


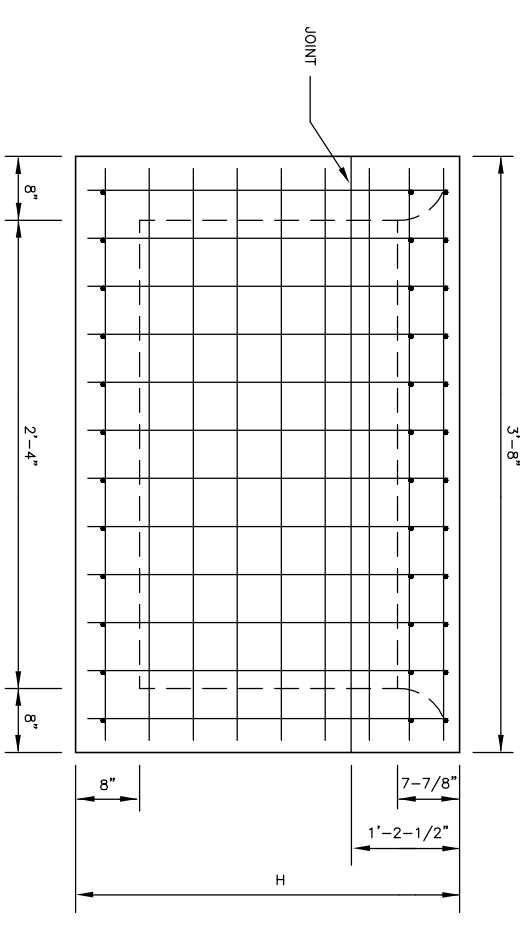


REAR WALL


REBAR SIZES, SPACING, AND CLEARANCES PER NOTE 3.

GENERAL NOTES


1. USE THE CONCRETE MIX SPECIFIED FOR THE CITY OF WICHITA CONCRETE PAVEMENT THROUGHOUT. ALL EXPOSED EDGES SHALL BE FINISHED WITH AN EDGING TOOL.
2. INLET INVERT SHALL BE SHAPED WITH 8 SACK MIX CONCRETE TO CREATE FLOW CHANNELS AND TO INCREASE HYDRAULIC EFFICIENCY SUCH THAT THE INLET WILL BE SELF CLEANING BETWEEN ALL INLET AND/OR OUTLET PIPES.
3. ALL BARS ARE #4 WITH 6" SPACING AND SHALL HAVE A MINIMUM CLEARANCE OF 1-1/2" UNLESS OTHERWISE NOTED ON THE PLANS.
4. NO DEDUCTIONS WILL BE MADE IN PAY LENGTH OF CURB, GUTTER, OR CURB AND GUTTER THROUGH THE INLET AREA.
5. USE DEETER 2441 INLET FRAMES WITH GRATES OR APPROVED EQUAL. INLET FRAMES TO BE PROOF LOAD TESTED TO 40,000 LBS. ON UNSUPPORTED SIDE.
6. REINFORCING BARS SHALL BE CUT OR BENT AROUND PIPES. NO DEDUCTION IN CONCRETE QUANTITIES SHALL BE MADE FOR PIPE OPENINGS.
7. THE VANES OF THE GRATE SHALL BE ORIENTED TO INTERCEPT FLOW FROM THE DIRECTION SHOWN BY FLOW ARROWS ON THE PLANS.

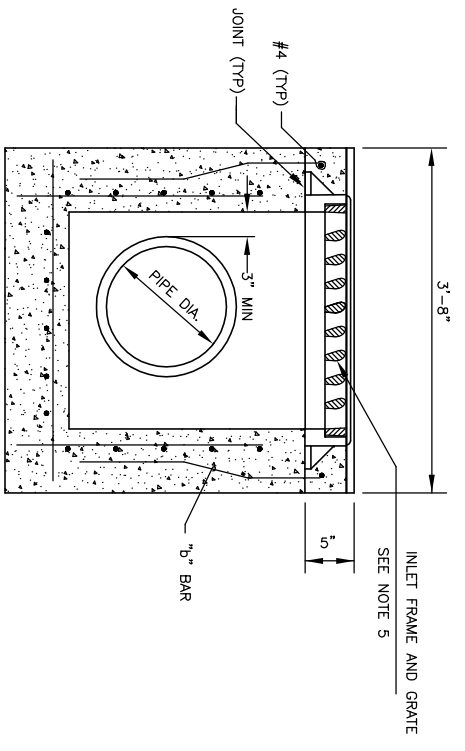

SECTION D - D

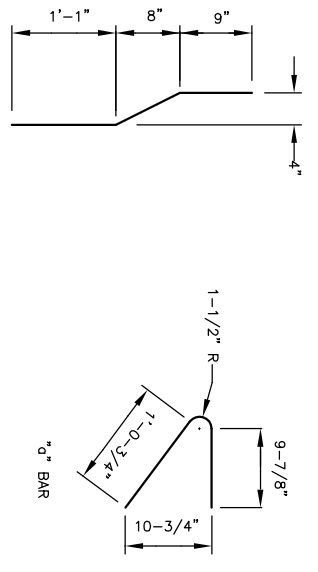

BENDING DIAGRAM

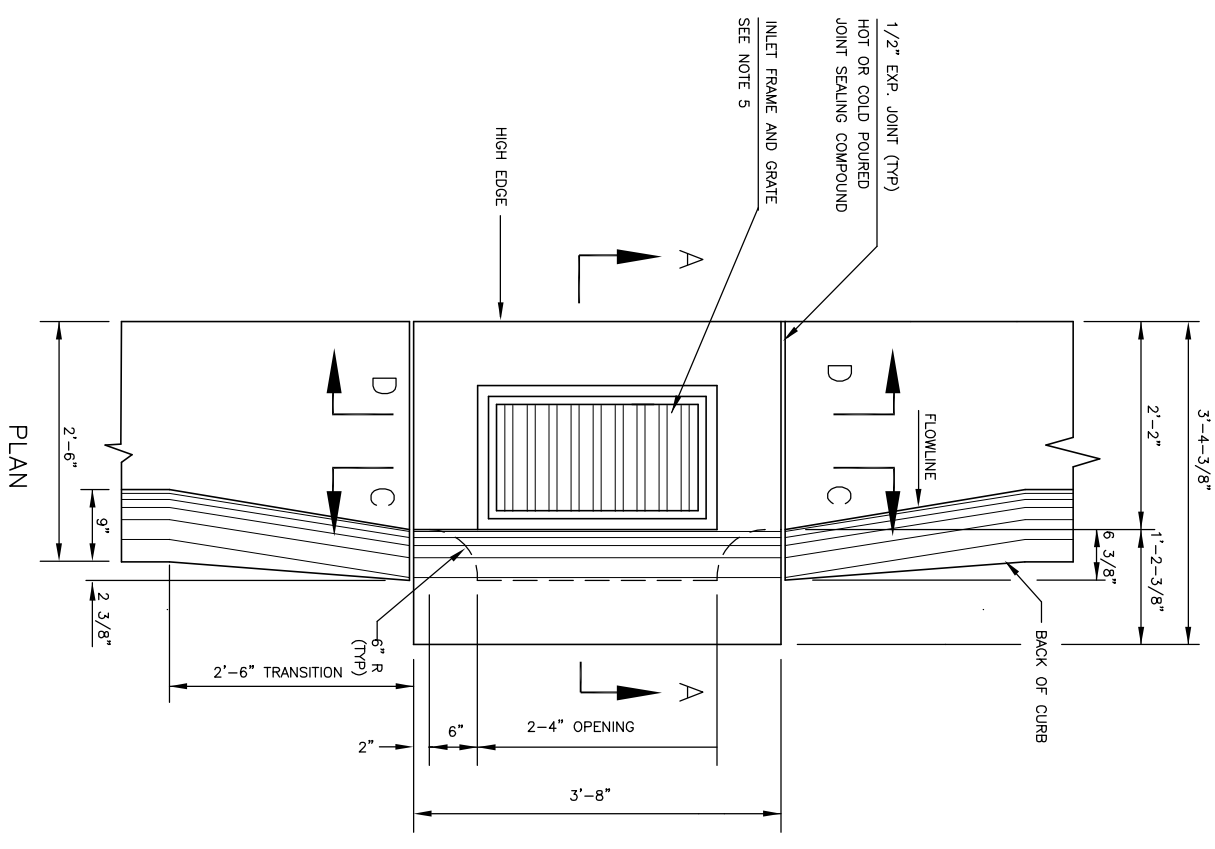

PLAN

J:\CMT\04178\dwg\DETAILS\Inlet\_Type2.dwg 03/24/2005 09:26:31 AM CST

KANSAS DEPARTMENT OF TRANSPORTATION

STANDARD TYPE II CURB INLET

OPENING = 3 5/8" x 2'-4"

PROJECT NO. 87 N-0190-01 SEDGWICK CO.

M K E C ENGINEERING CONSULTANTS, INC. WICHITA, KANSAS

DESIGNED BY: LKA	CHECKED BY: LKA
DRAWN BY: WJU	DATE: 2004
SHEET 27 OF 96	