


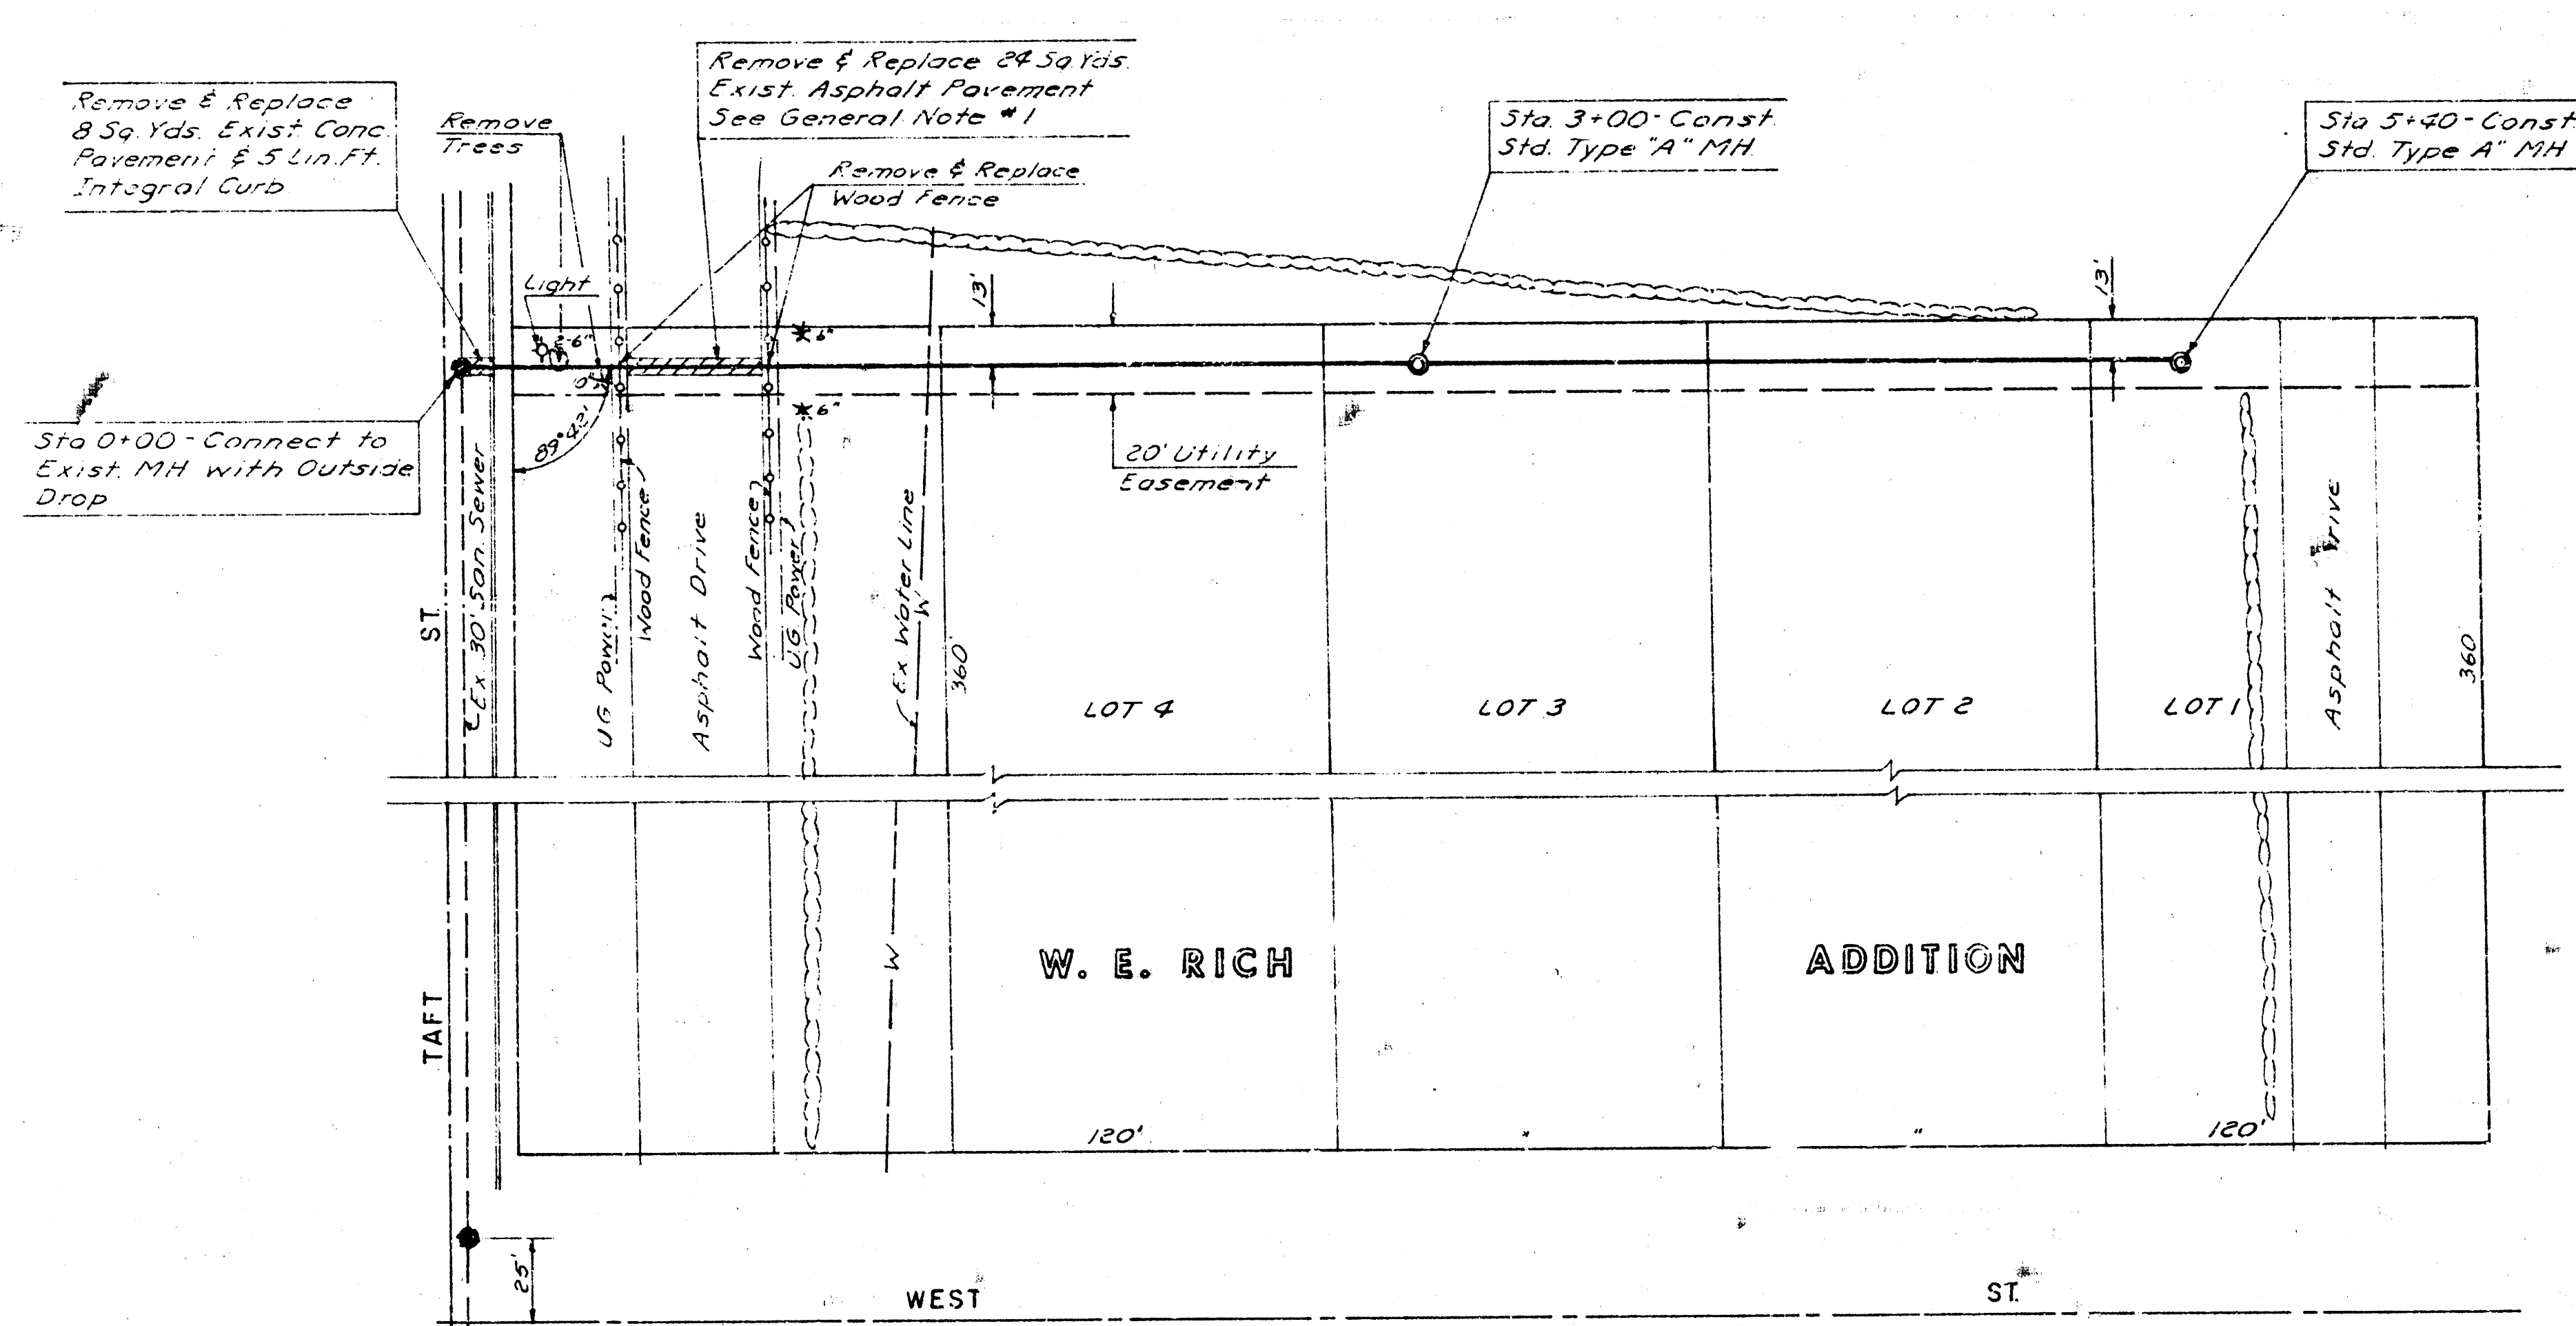

Scale: 1" = 40'

GENERAL NOTES


- Contractor shall insure that entrance to Drive in Theatre is left open to traffic after 6:00 PM. This shall be accomplished by either completing excavation, laying of pipe and back-filling by this time or by phasing construction to insure that one-half of pavement will be left open to traffic. Contractor shall notify manager of theatre prior to beginning construction. Min. Funt. thickness: 5".
- Contractor shall be responsible for verifying location of underground power lines and water line prior to excavating the trench. Care shall be exercised so that these lines are not disturbed.
- Contractor shall install a 5' stub and plug pipe on the North side of manhole at Sta. 3+00. This point is the end of Phase I construction.

APPROVED FOR RECORD  
 DATE: 5-16-74  
 BY: [Signature]

NOTE TO CONTRACTOR  
 This project is to be completed in accordance with the specifications of the Standard Specifications for Highway Construction, 1973 Edition, published by the American Association of Highway Engineers and Constructors, Inc., 1115 North 17th Street, Suite 100, Phoenix, Arizona 85002. The project is to be completed in accordance with the plans and specifications of the project.

ESTIMATE OF QUANTITIES

| Item                                | Phase I | Phase II |
|-------------------------------------|---------|----------|
| 8" VCP Lin. Ft.                     | 305     | 235      |
| Type 'A' Manhole Ea.                | 1       | 1        |
| Connect to Exst. Manhole Ea.        | 1       | 1        |
| Remove & Replace Conc. Funt. 3 Y.   | 24      | 24       |
| Remove & Replace Asphalt Funt. 5 Y. | 5       | 5        |
| Remove & Replace Integral Curb L.F. | 189     | 113      |
| Flushed Sand Fill in Place Tons.    | 2       | 2        |
| Trees Removed Ea.                   | 1.5     | 1.5      |
| Remove & Replace Wood Fence L.S.    | 1.5     | 1.5      |

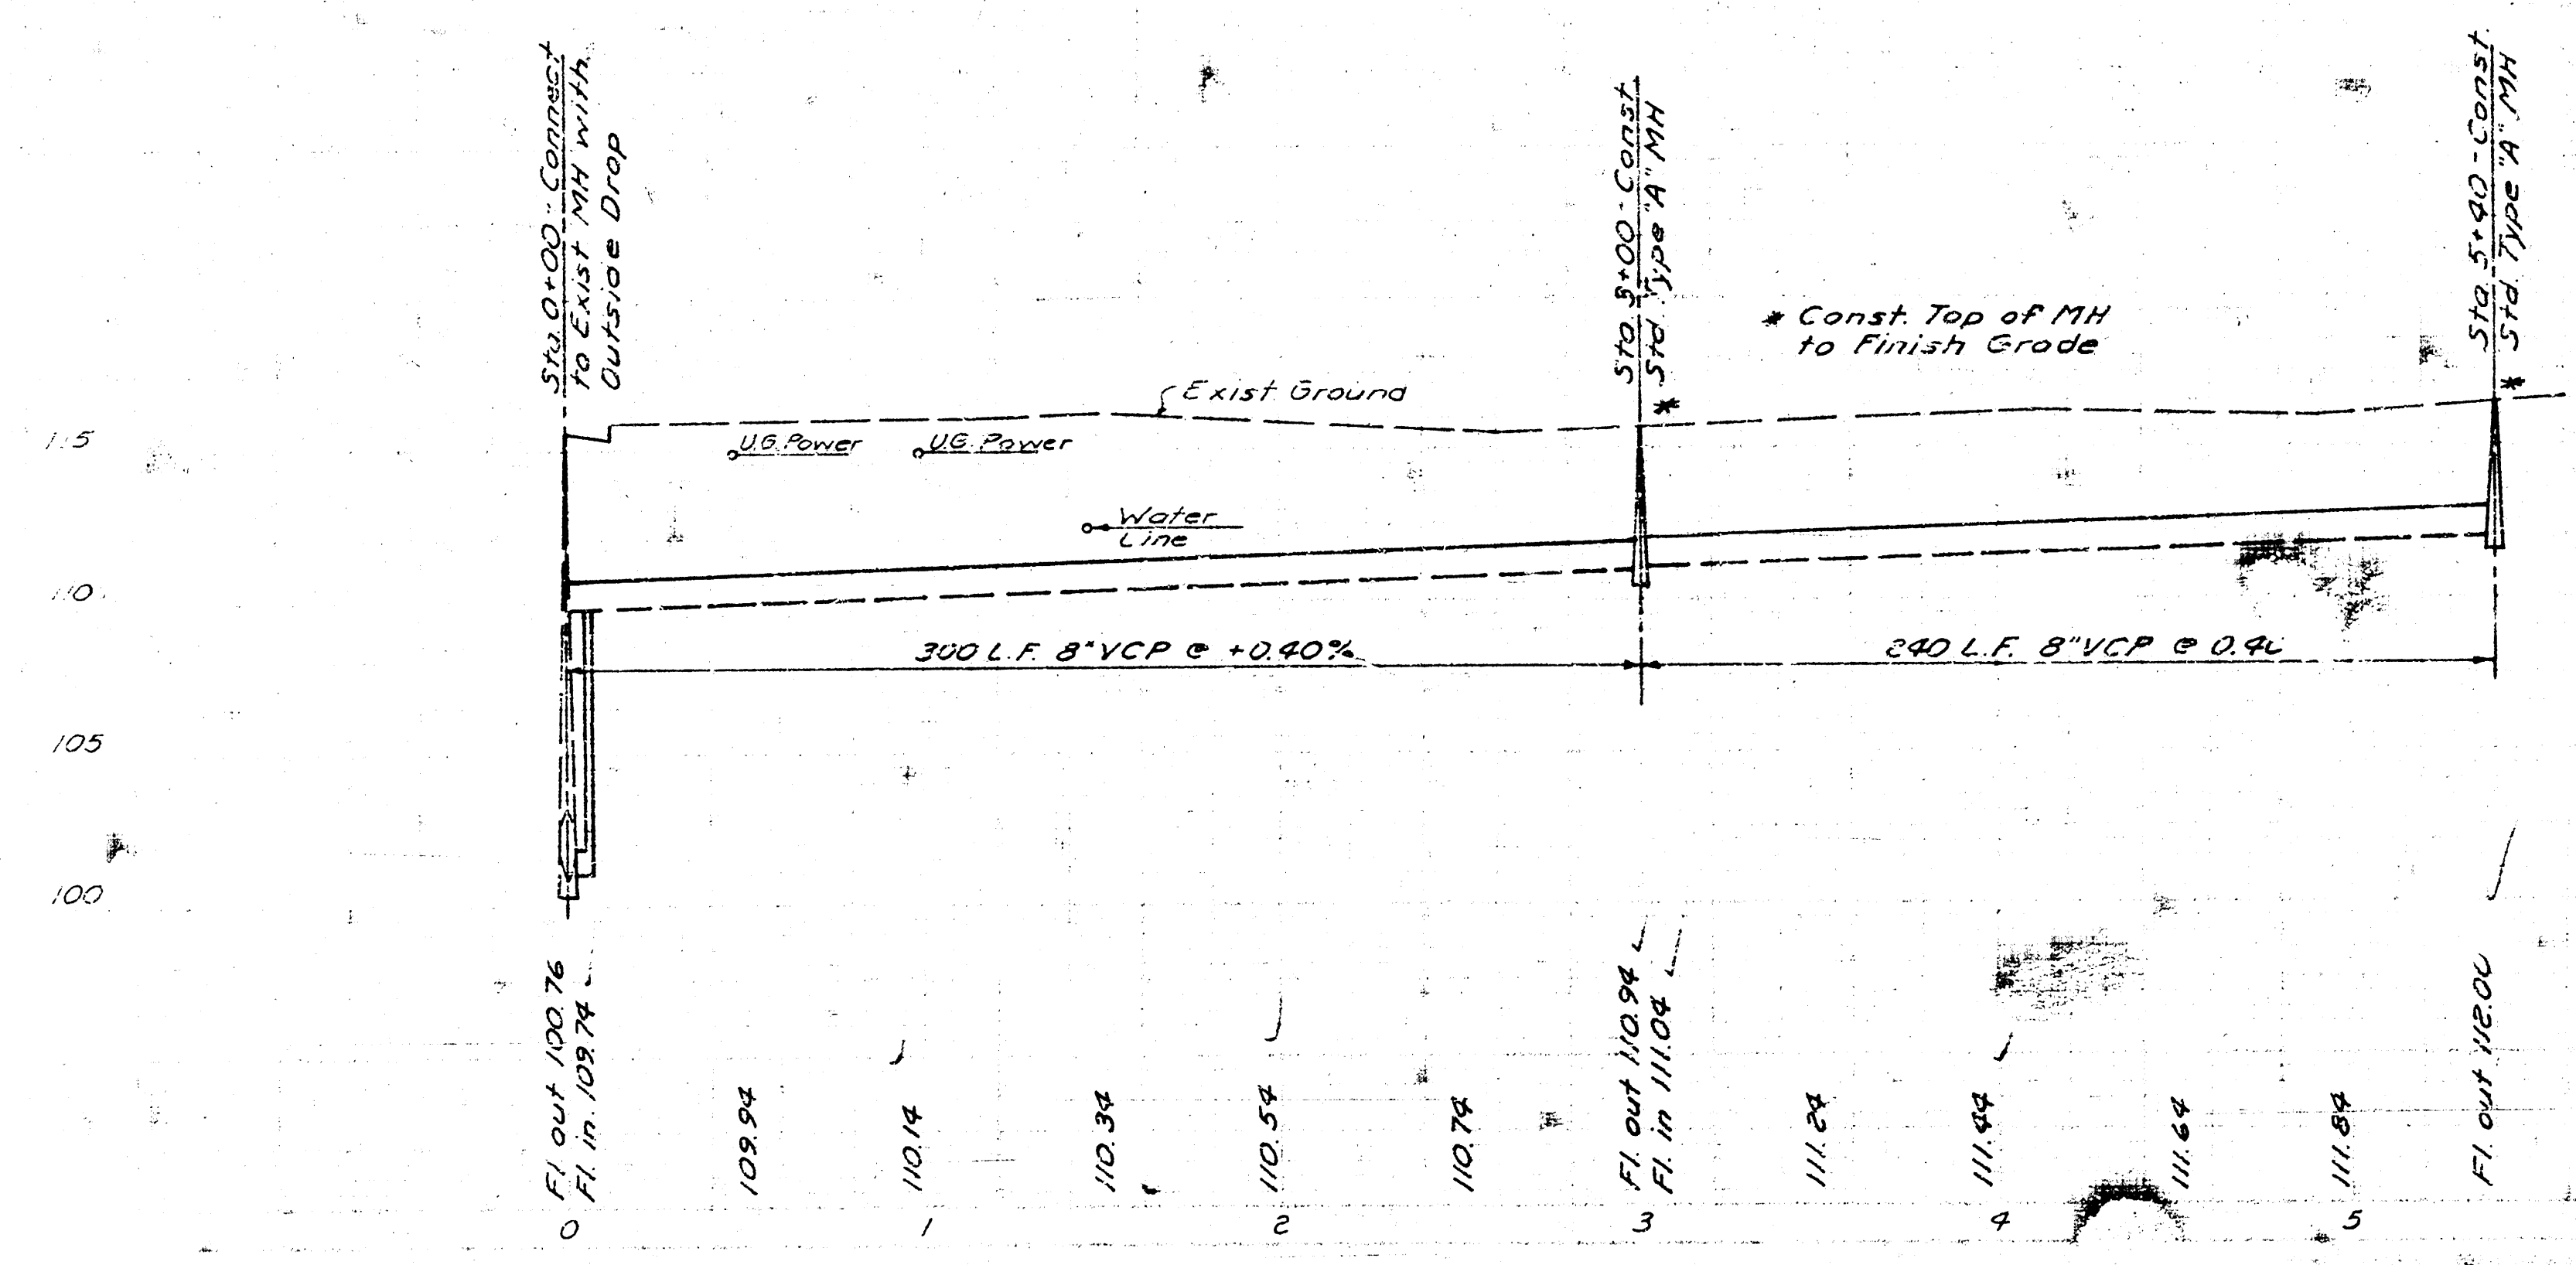

PLAN PROFILE  
 SANITARY SEWER

382174-103