



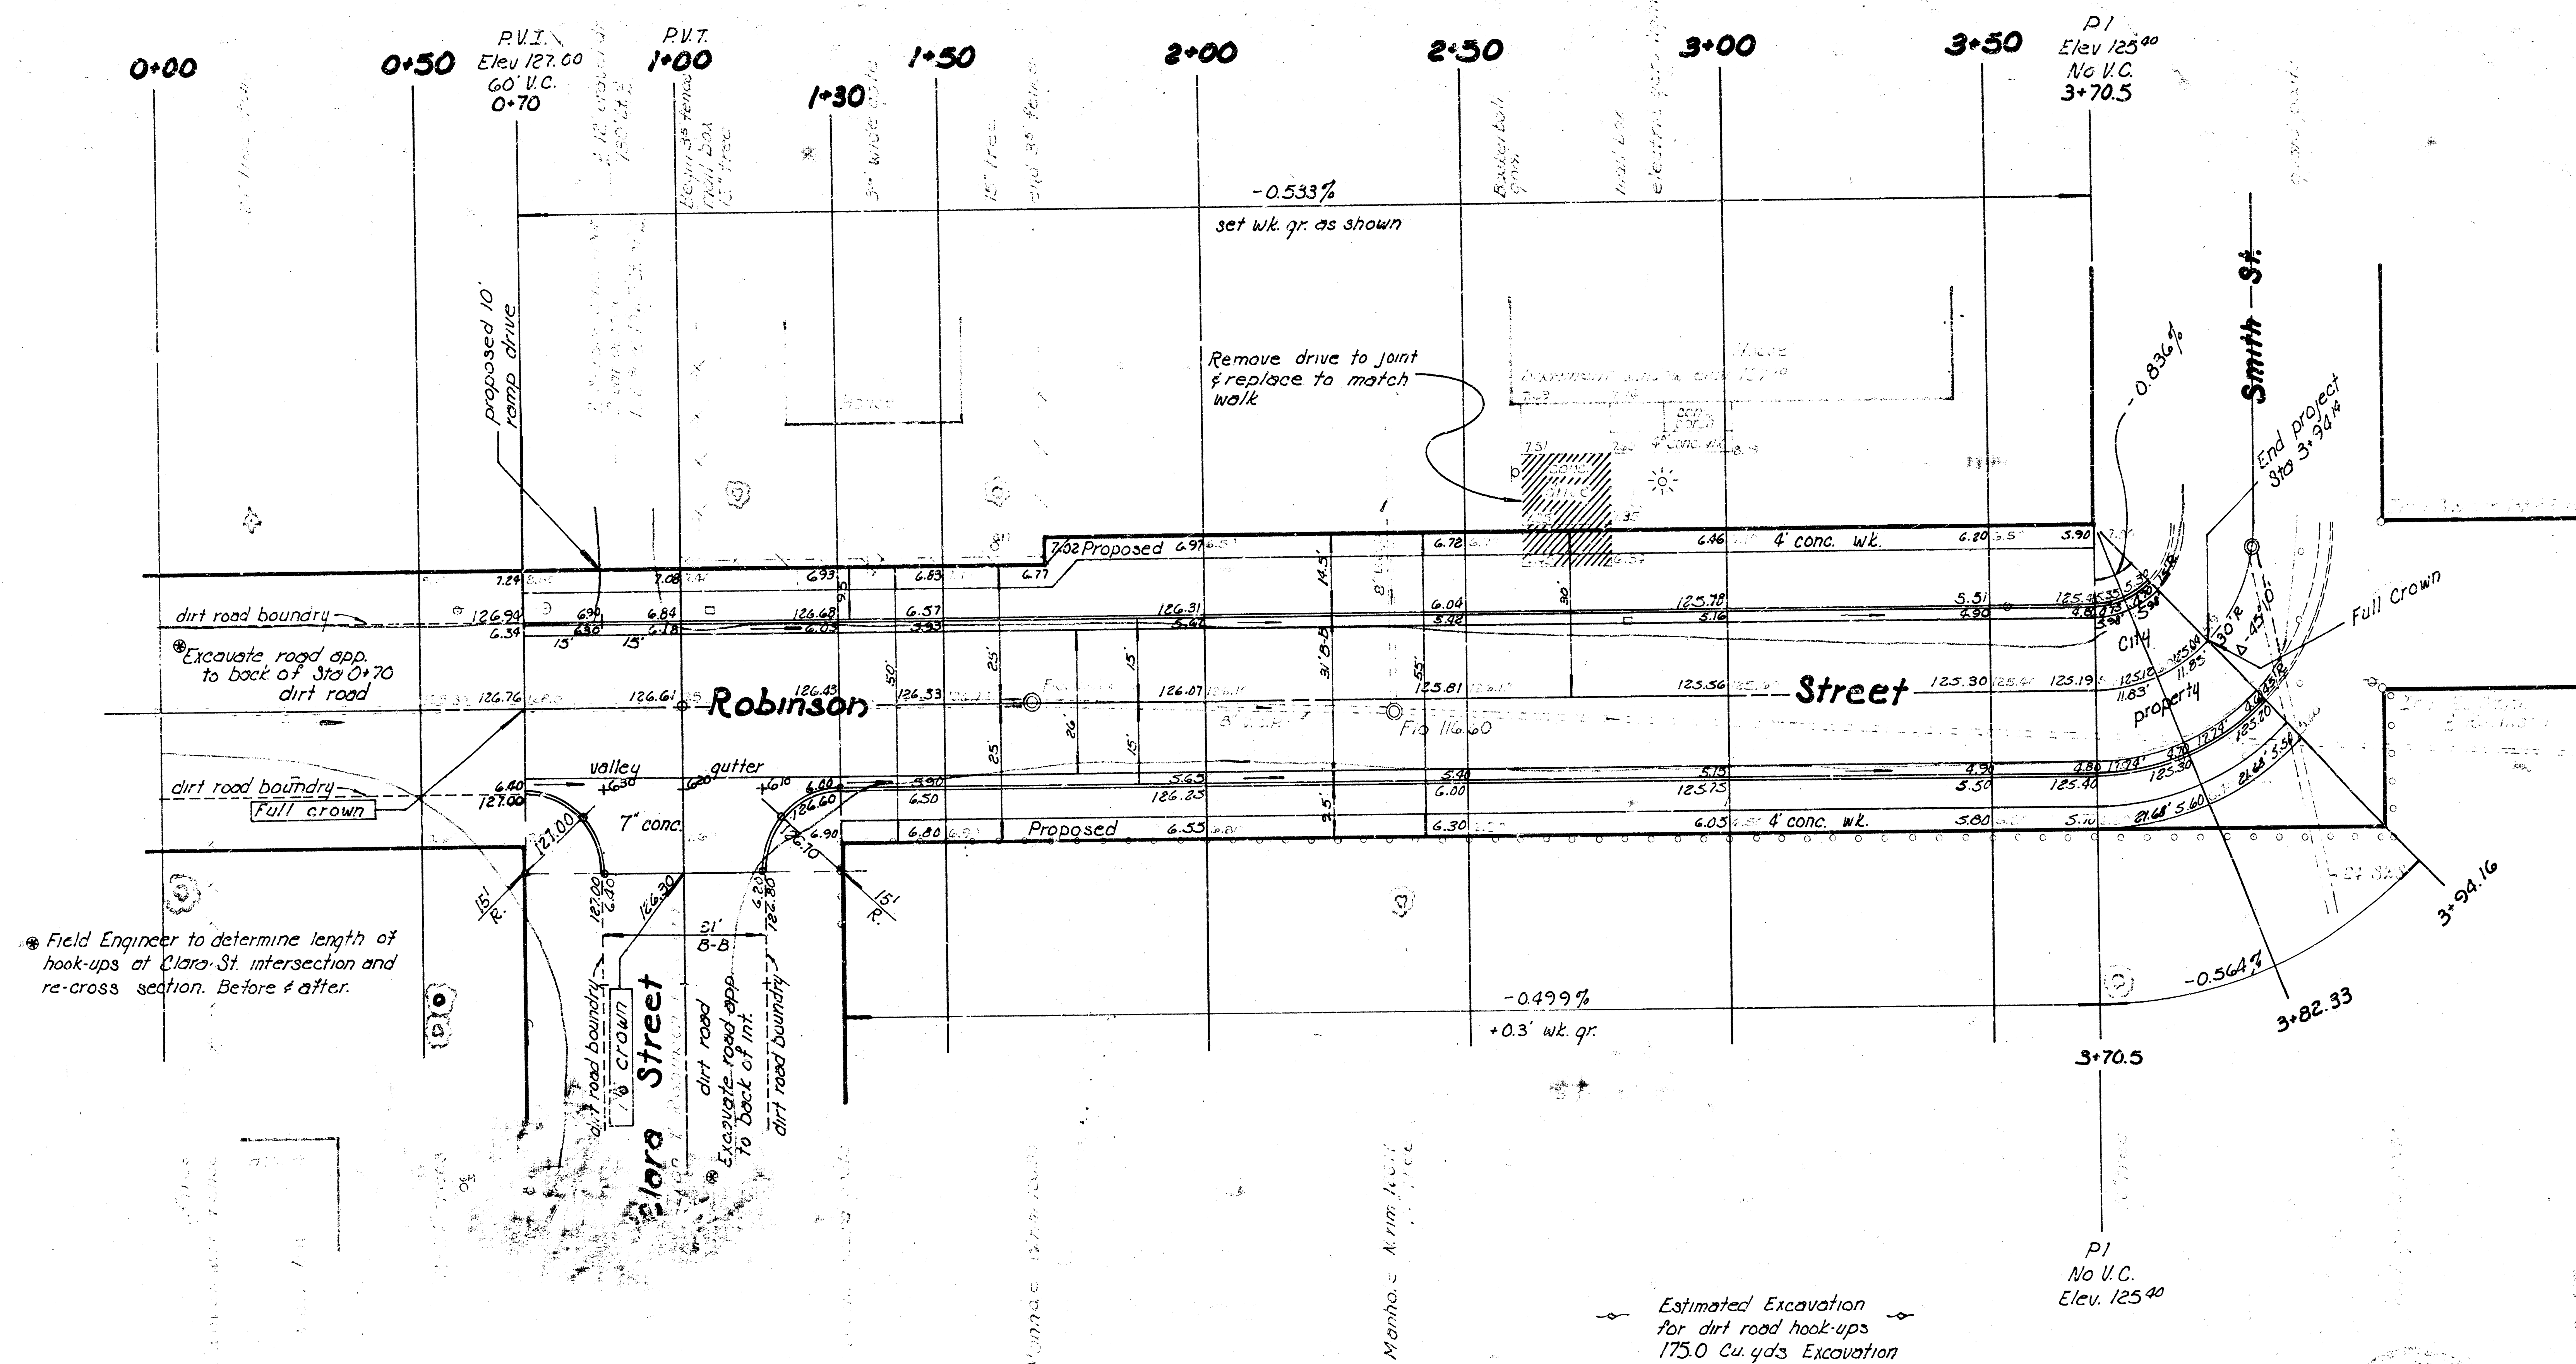

- Note: Contractor to clear right-of-way, grade parking and compact fill in sidewalk areas. Sidewalks to be constructed by "others".
- Note: Type of sub-grade treatment shall be as determined by the field engineer. Sub-grade treatment may consist of lime treatment, cement treatment, sub-grade modification, or any combination of these.
- Note: Baseline is $\pm$ Robinson.
- Note: Contractor to excavate and grade dirt hook-ups of intersection at Clara and Robinson as shown on plans and as further determined by the Engineer. Field Engineer to take original and final cross sections to determine excavation quantity.
- Note to Engineer - Take ties to all irons to be removed by this project and replace.

Property Earthwork	
Excavation 362.1 Cu. yds.	Compacted Fill 0.0 Cu. yds.
+10% 36.2 Cu. yds.	
Total 398.3 Cu. yds.	Total 0.0 Cu. yds.

City Earthwork	
Excavation 146.5 Cu. yds.	Compacted Fill 0.0 Cu. yds.
+10% 14.7 Cu. yds.	
Total 161.2 Cu. yds.	Total 0.0 Cu. yds.

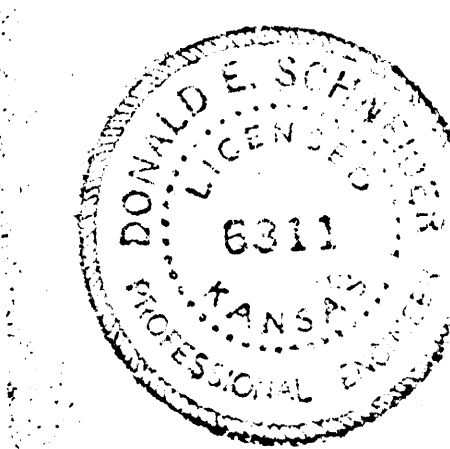

ROBINSON ST.
W. L. CLARA
 TO E. L. SMITH
 ASPHALTIC CONCRETE PAVEMENT
 31' B-B WITH COMB. CB. & GTR.
 CITY OF WICHITA, KANSAS
 R. W. LINN CITY ENGINEER
 PROJECT NO. DAKS568060
 DATE: APRIL 1973