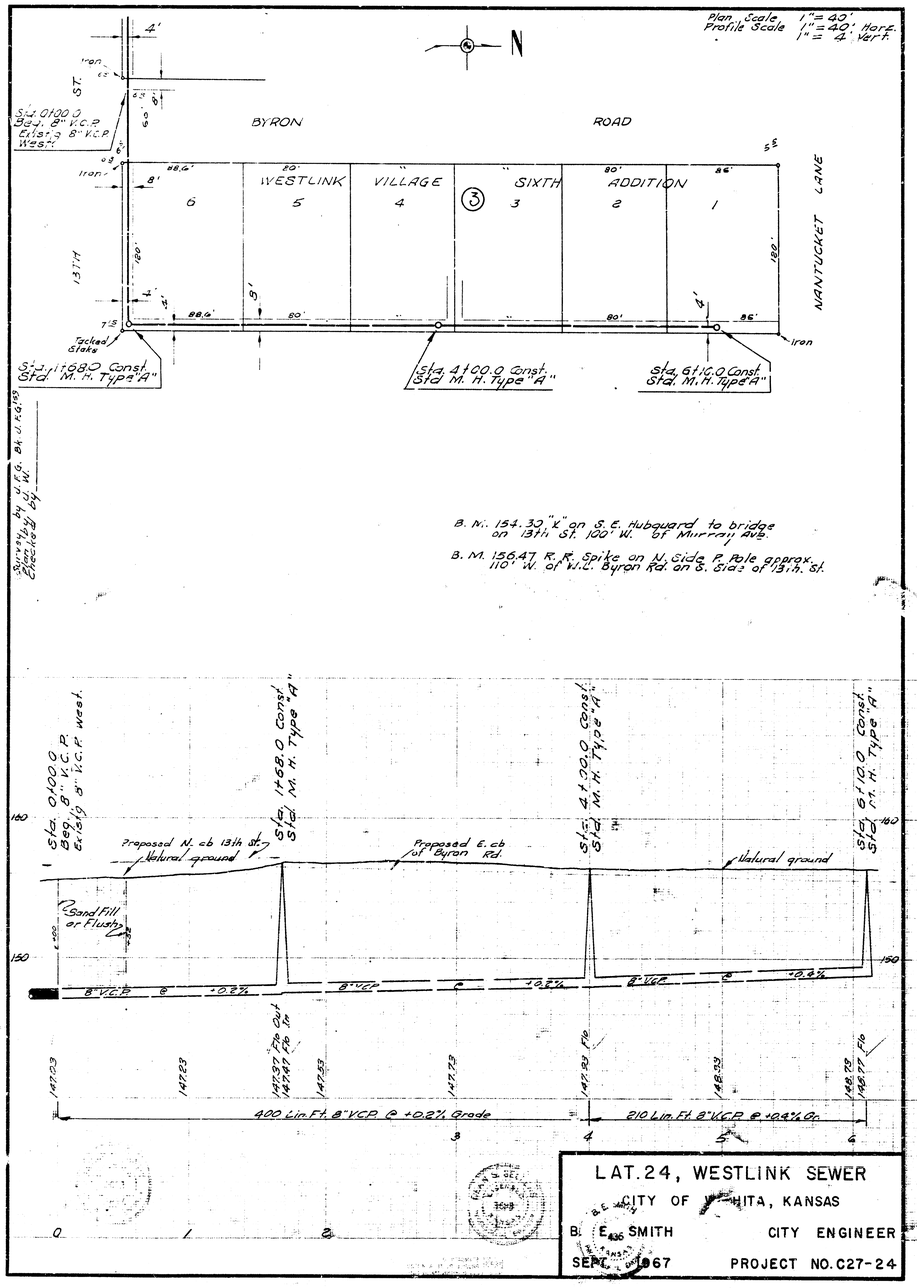
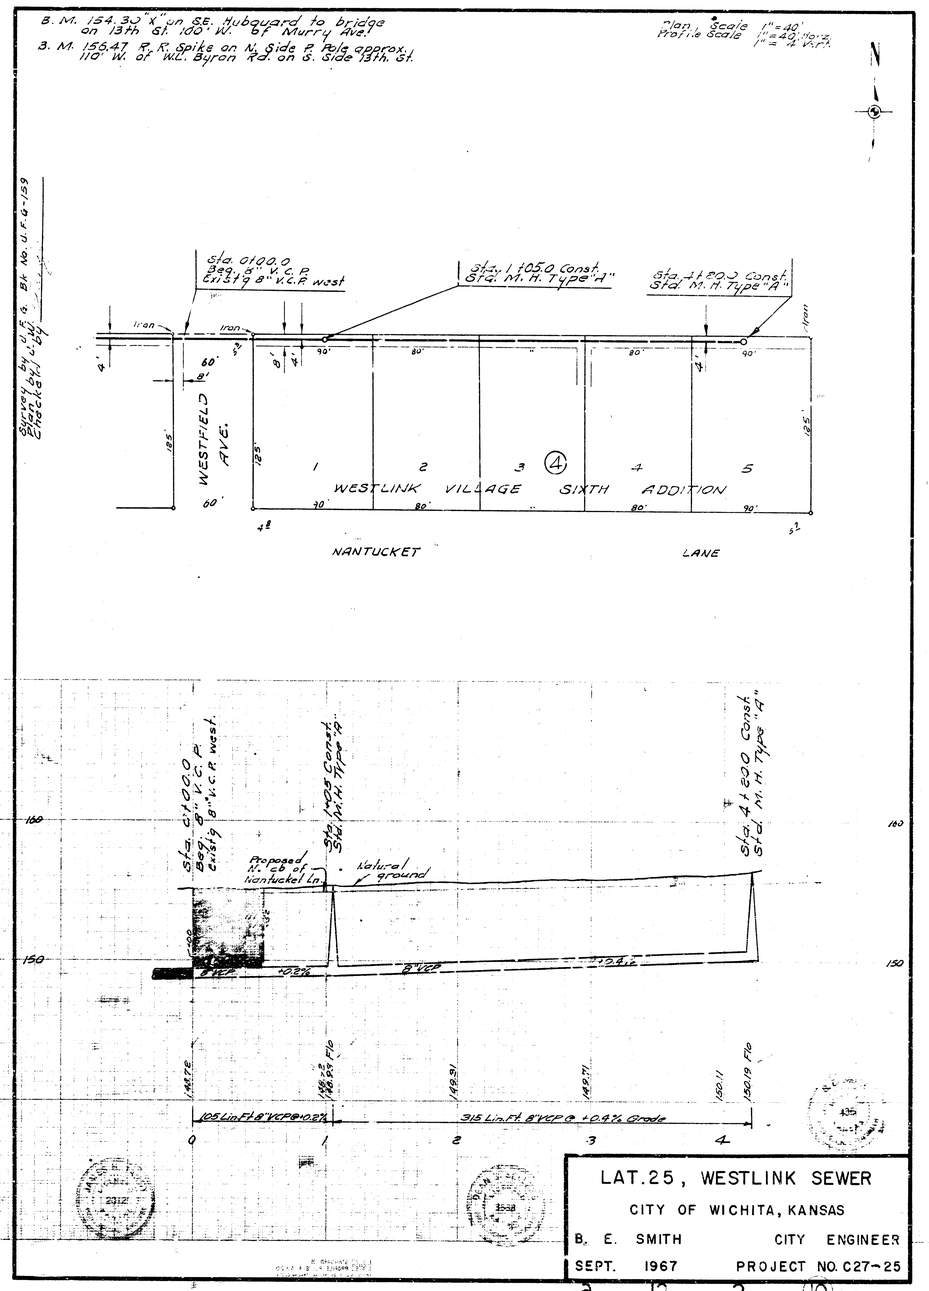

Plan Scale 1"=40'
Profile Scale 1"=40' Horz.
1"=4' Vert.
N
BYRON ROAD
WESTLINK VILLAGE SIXTH ADDITION
NANTUCKET LANE
13TH ST.
Sta. 0100.0 Beg. 8" V.C.P. Exist'g 8" V.C.P. West.
Sta. 1+68.0 Const. Std. M.H. Type "A"
Sta. 4+00.0 Const. Std. M.H. Type "A"
Sta. 6+10.0 Const. Std. M.H. Type "A"
Tacked Stakes
Iron
B. M. 154.33 "X" on S.E. Hubguard to bridge on 13th St. 100' W. of Murray Ave.
B. M. 156.47 R.R. Spike on N. Side P. Pole approx. 110' W. of W.C. Byron Rd. on S. Side of 13th St.
Surveyed by U.F.G. Bk. U.F.G.-159
Plan by U.F.G.
Checked by C.W.
400 Lin. Ft. 8" VCP @ +0.2% Grade
210 Lin. Ft. 8" VCP @ +0.4% Gr.
Proposed N. cb 13th St.
Natural ground
Proposed E. cb of Byron Rd.
Sand Fill or Flush
8" V.C.P. @ +0.2%
8" VCP @ +0.4%
LAT. 24, WESTLINK SEWER
CITY OF WICHITA, KANSAS
B. E. SMITH CITY ENGINEER
SEPT. 1967 PROJECT NO. C27-24


B. M. 154.33 "X" on SE. Hubguard to bridge on 13th St. 100' W. of Murry Ave.
B. M. 156.47 R.R. Spike on N. Side P. Pole approx. 110' W. of W.C. Byron Rd. on S. Side 13th St.
Plan Scale 1"=40'
Profile Scale 1"=40' Horiz.
1"=4' Vert.
N
Survey by U.F.G. Bk. No. U.F.G.-159
Plan by U.F.G.
Checked by C.W.
Sta. 0100.0 Beg. 8" V.C.P. Exist'g 8" V.C.P. west
Sta. 1+05.0 Const. Std. M.H. Type "A"
Sta. 4+00.0 Const. Std. M.H. Type "A"
WESTFIELD AVE.
WESTLINK VILLAGE SIXTH ADDITION
NANTUCKET LANE
Iron
Sta. 0+00.0
Proposed N. cb of Nantucket Ln.
Natural ground
8" VCP @ +0.2%
8" VCP @ +0.4%
105 Lin. Ft. 8" VCP @ +0.2%
315 Lin. Ft. 8" VCP @ +0.4% Grade
LAT. 25, WESTLINK SEWER
CITY OF WICHITA, KANSAS
B. E. SMITH CITY ENGINEER
SEPT. 1967 PROJECT NO. C27-25