

CITY OF WICHITA, KANSAS

STREET IMPROVEMENTS (WEST MAPLE STREET)

EAST LINE ROBIN ROAD TO 360' W. OF W.L. BRUNSWICK

MICHAEL E. LINDEBAK, CITY ENGINEER


PHASE II LANDSCAPING PLAN

PROJ. NO. 472-76-245-81638-000-000-001

INDEX NO. 705327

GENERAL NOTES

1. INFORMATION SHOWN ON PLANS NOT DIRECTLY RELATED TO THE TREE PLANTINGS IS NOT A PART OF THIS CONTRACT AND SHALL BE CONSIDERED AS DELETED.
2. ALL AREAS DISTURBED BY THE CONTRACTOR SHALL BE RESTORED TO A CONDITION ACCEPTABLE TO THE ENGINEER. THIS WORK SHALL BE SUBSIDIARY TO OTHER BID ITEMS.
3. EXACT LOCATION FOR TREE PLANTINGS TO BE DETERMINED BY THE ENGINEER.
4. LANDSCAPE CONTRACTOR IS TO VERIFY THE LOCATION OF ALL UNDERGROUND UTILITIES PRIOR TO INSTALLATION OF PLANT MATERIAL (INCLUDING SANITARY SEWERS). UTILITIES CAN BE FLAGGED BY CALLING 687-2470.
5. TREES SHALL BE ORNAMENTAL TYPE (SPRINGSNOW CRABAPPLE, HAWTHORNE, CHANTICLEER PEAR & GOLDEN RAINTREE) AND RANGE IN SIZE FROM 2-1/2' TO 3'. TREES SHALL BE BALLED AND BAGGED.

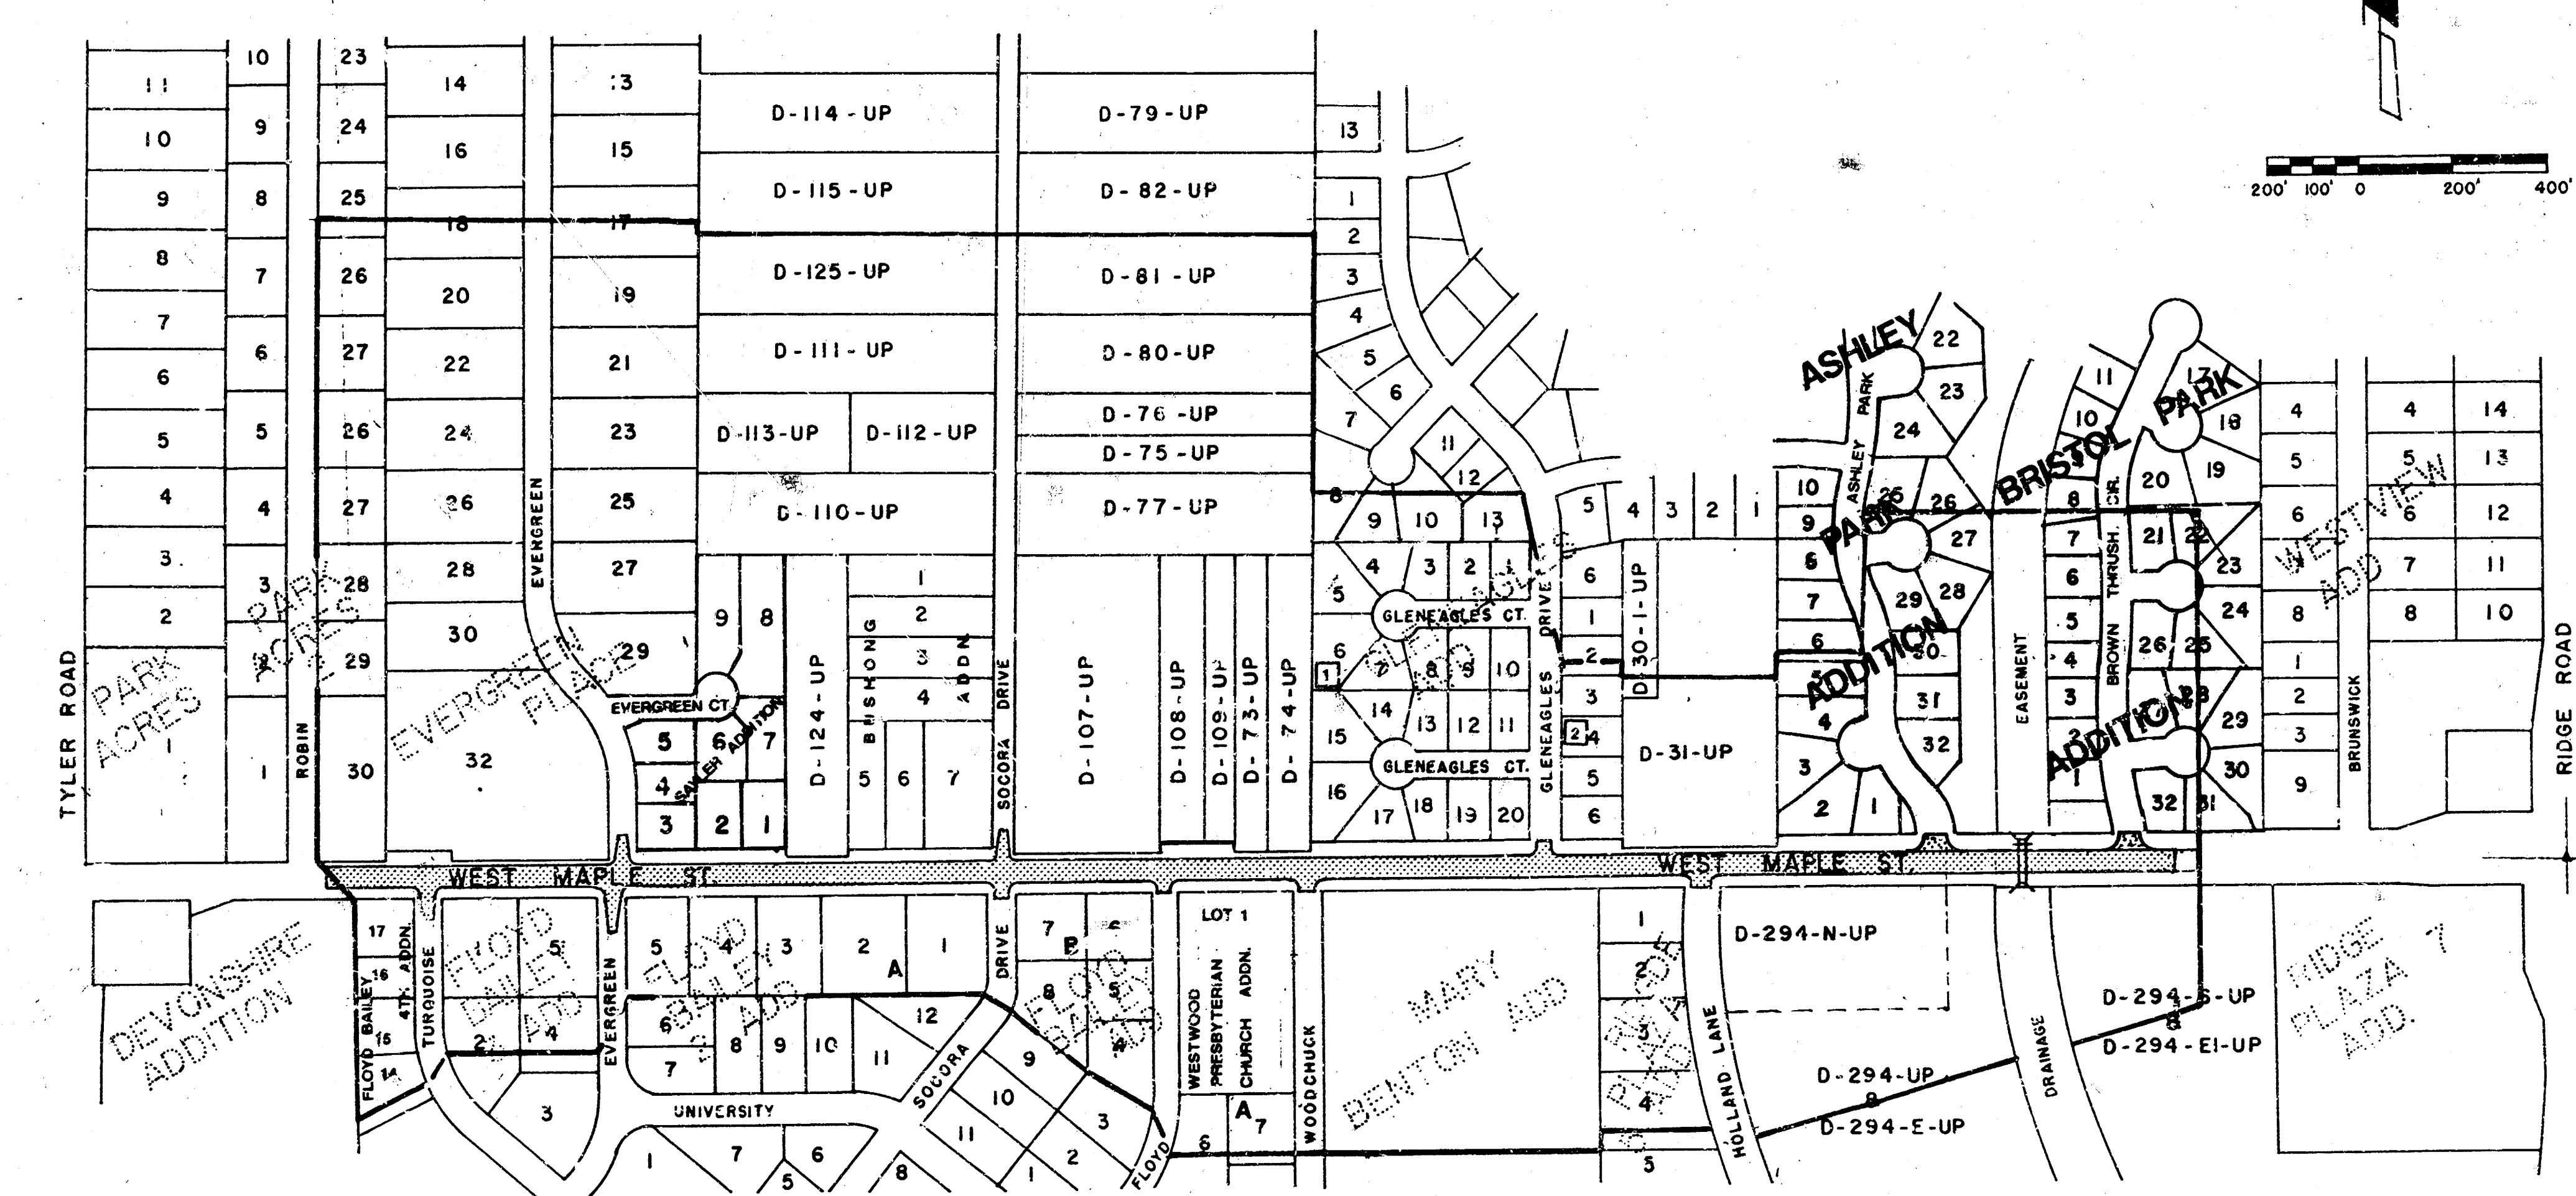

INDEX


SHEET NO.	DESCRIPTION
1.	TITLE SHEET
2-8	PLAN (TREE LOCATIONS)
9.	TREE PLANTING SCHEDULE with DETAILS

PLANS PREPARED BY

Booker/Freund
Engineers Architects Planners

WICHITA, KANSAS



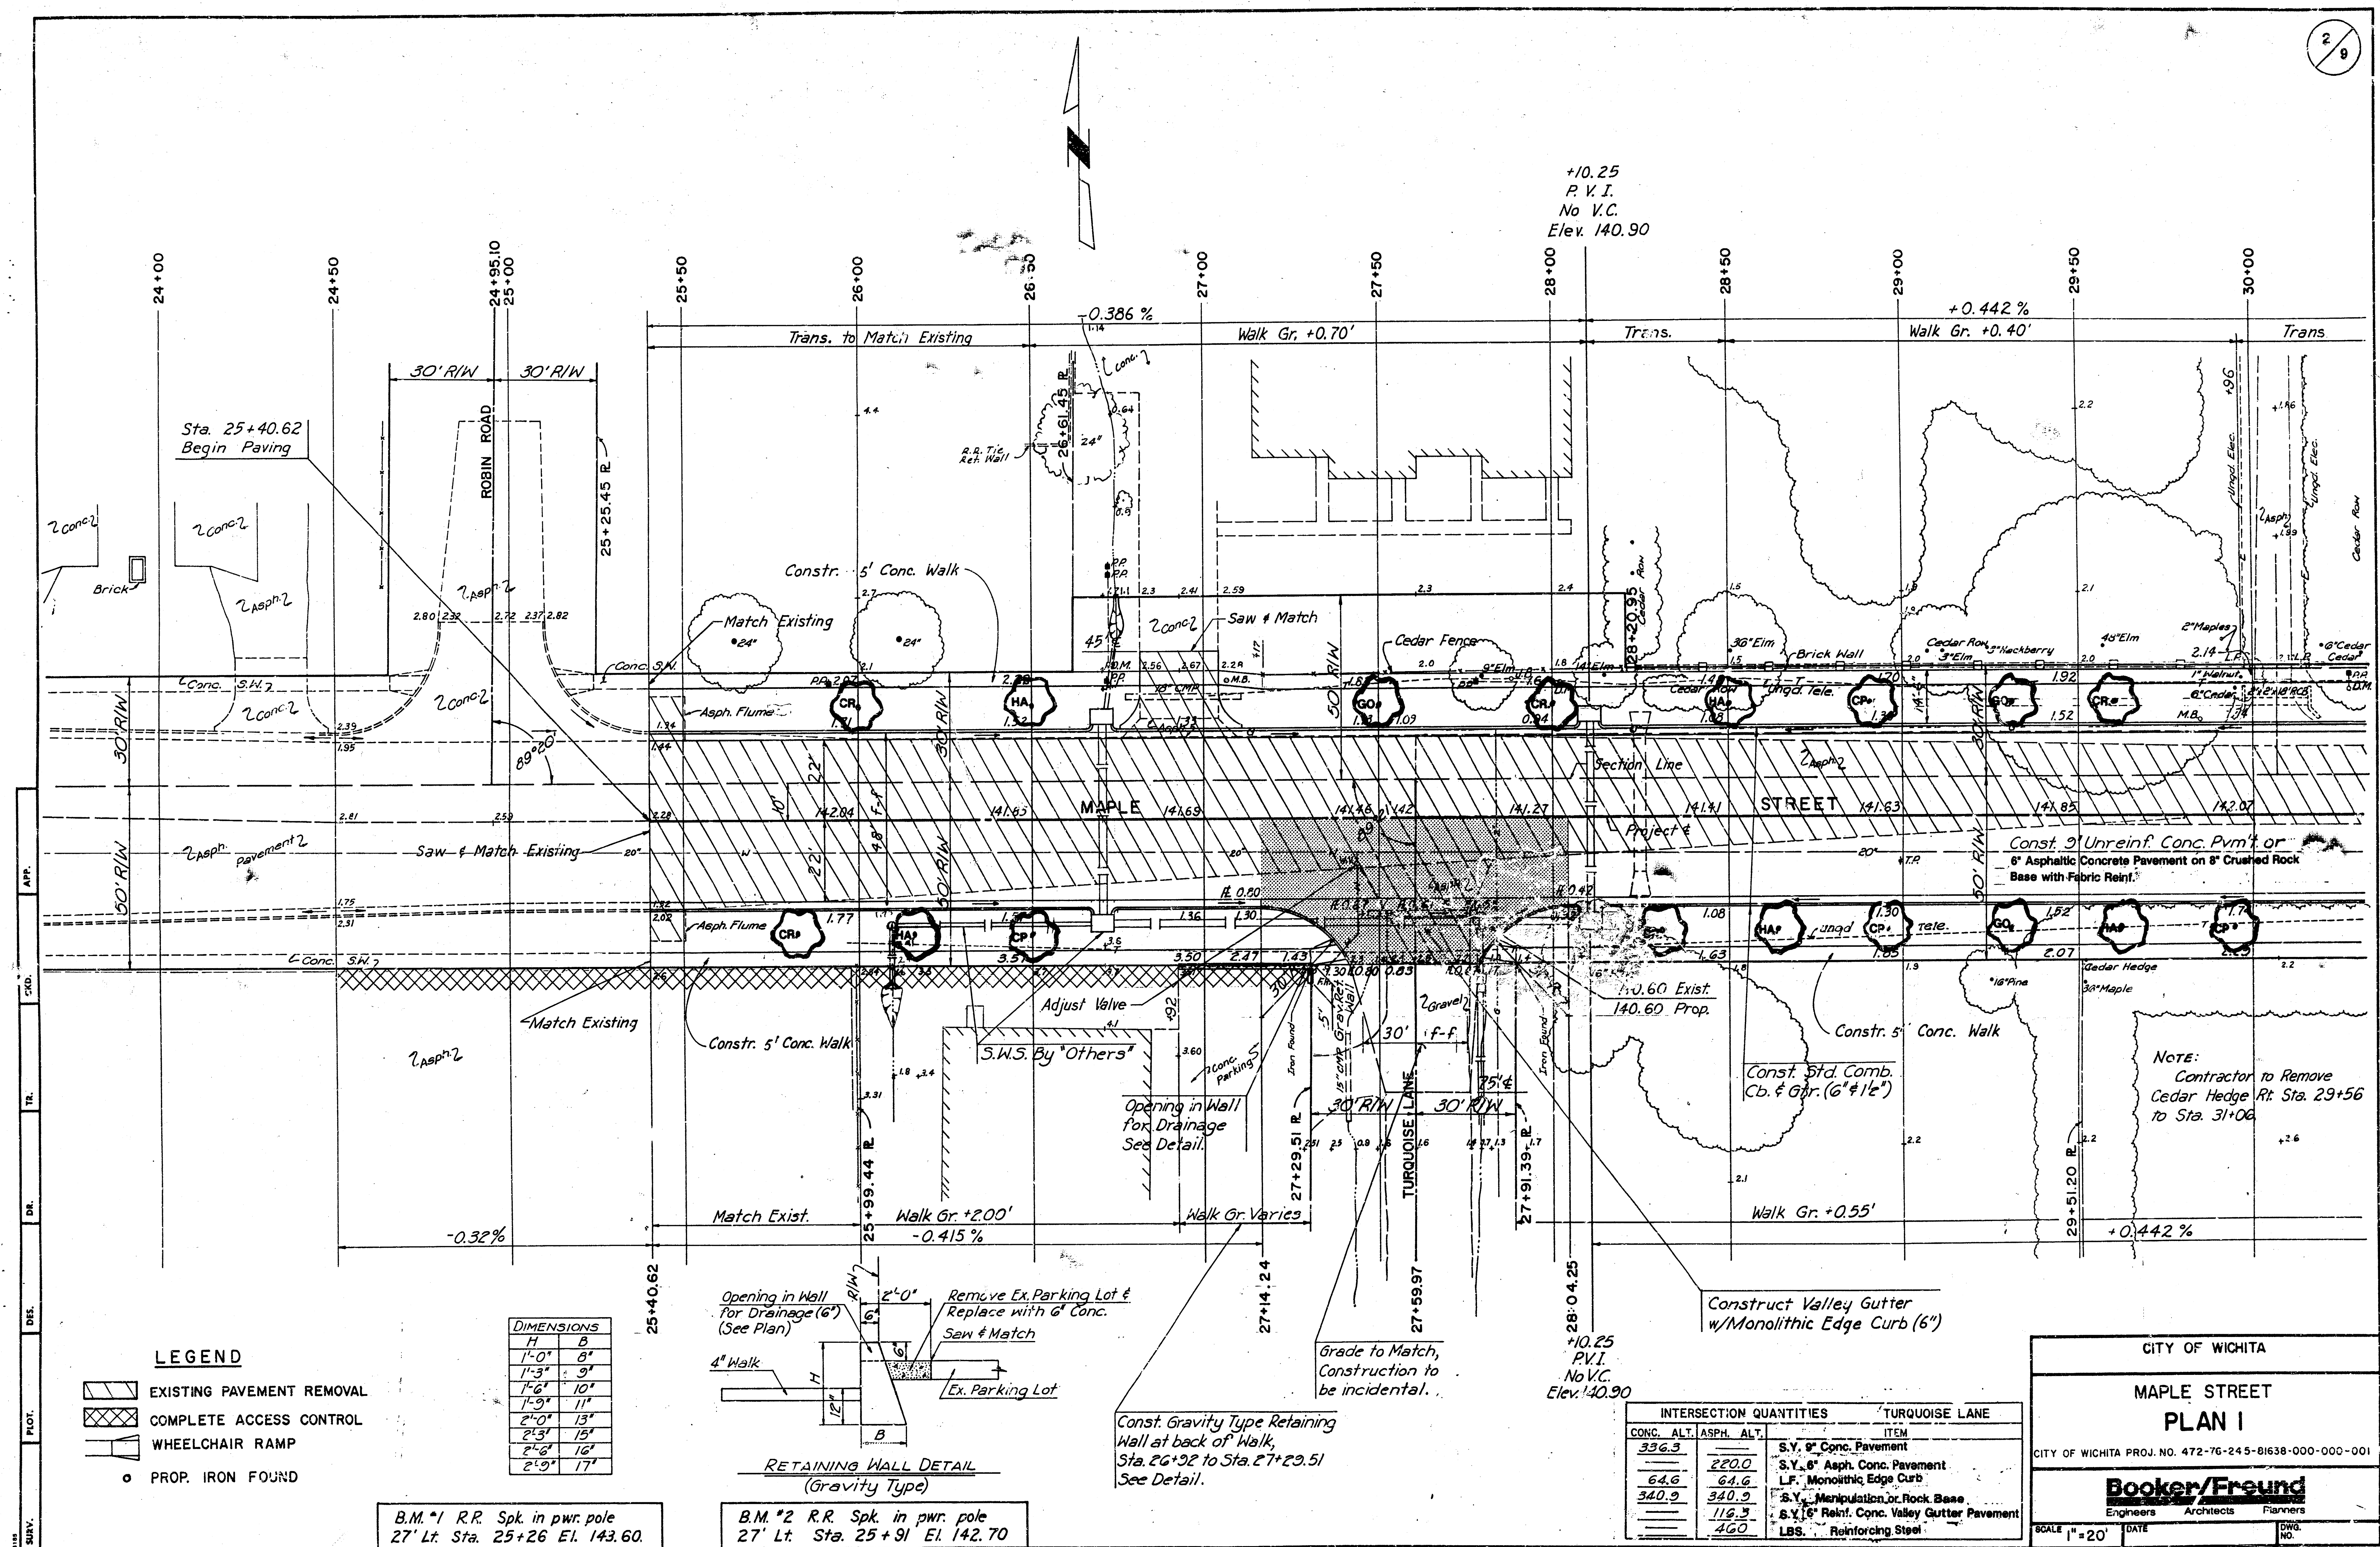


INTERSECTION QUANTITIES		EVERGREEN NORTH
CONC.	ALT.	ITEM
336.3	220.0	S.Y. 9" CONC. PVMT.
64.6	64.6	S.Y. 6" Asph. Conc. Pavement
340.9	340.9	L.F. MONOLITHIC CURB
116.3	116.3	S.Y. Manipulation or Rock Base
460	460	S.Y. 6" Reinf. Conc. Valley Gutter Pvm't.
		LBS. REINFORCING STEEL

+50
P.V.I.
No V.C.
Elev. 141.96

+25
P.V.I.
No V.C.
Elev. 141.08

+25
P.V.I.
No V.C.
Elev. 141.72

Grade to Match
Construction to
be Incidental

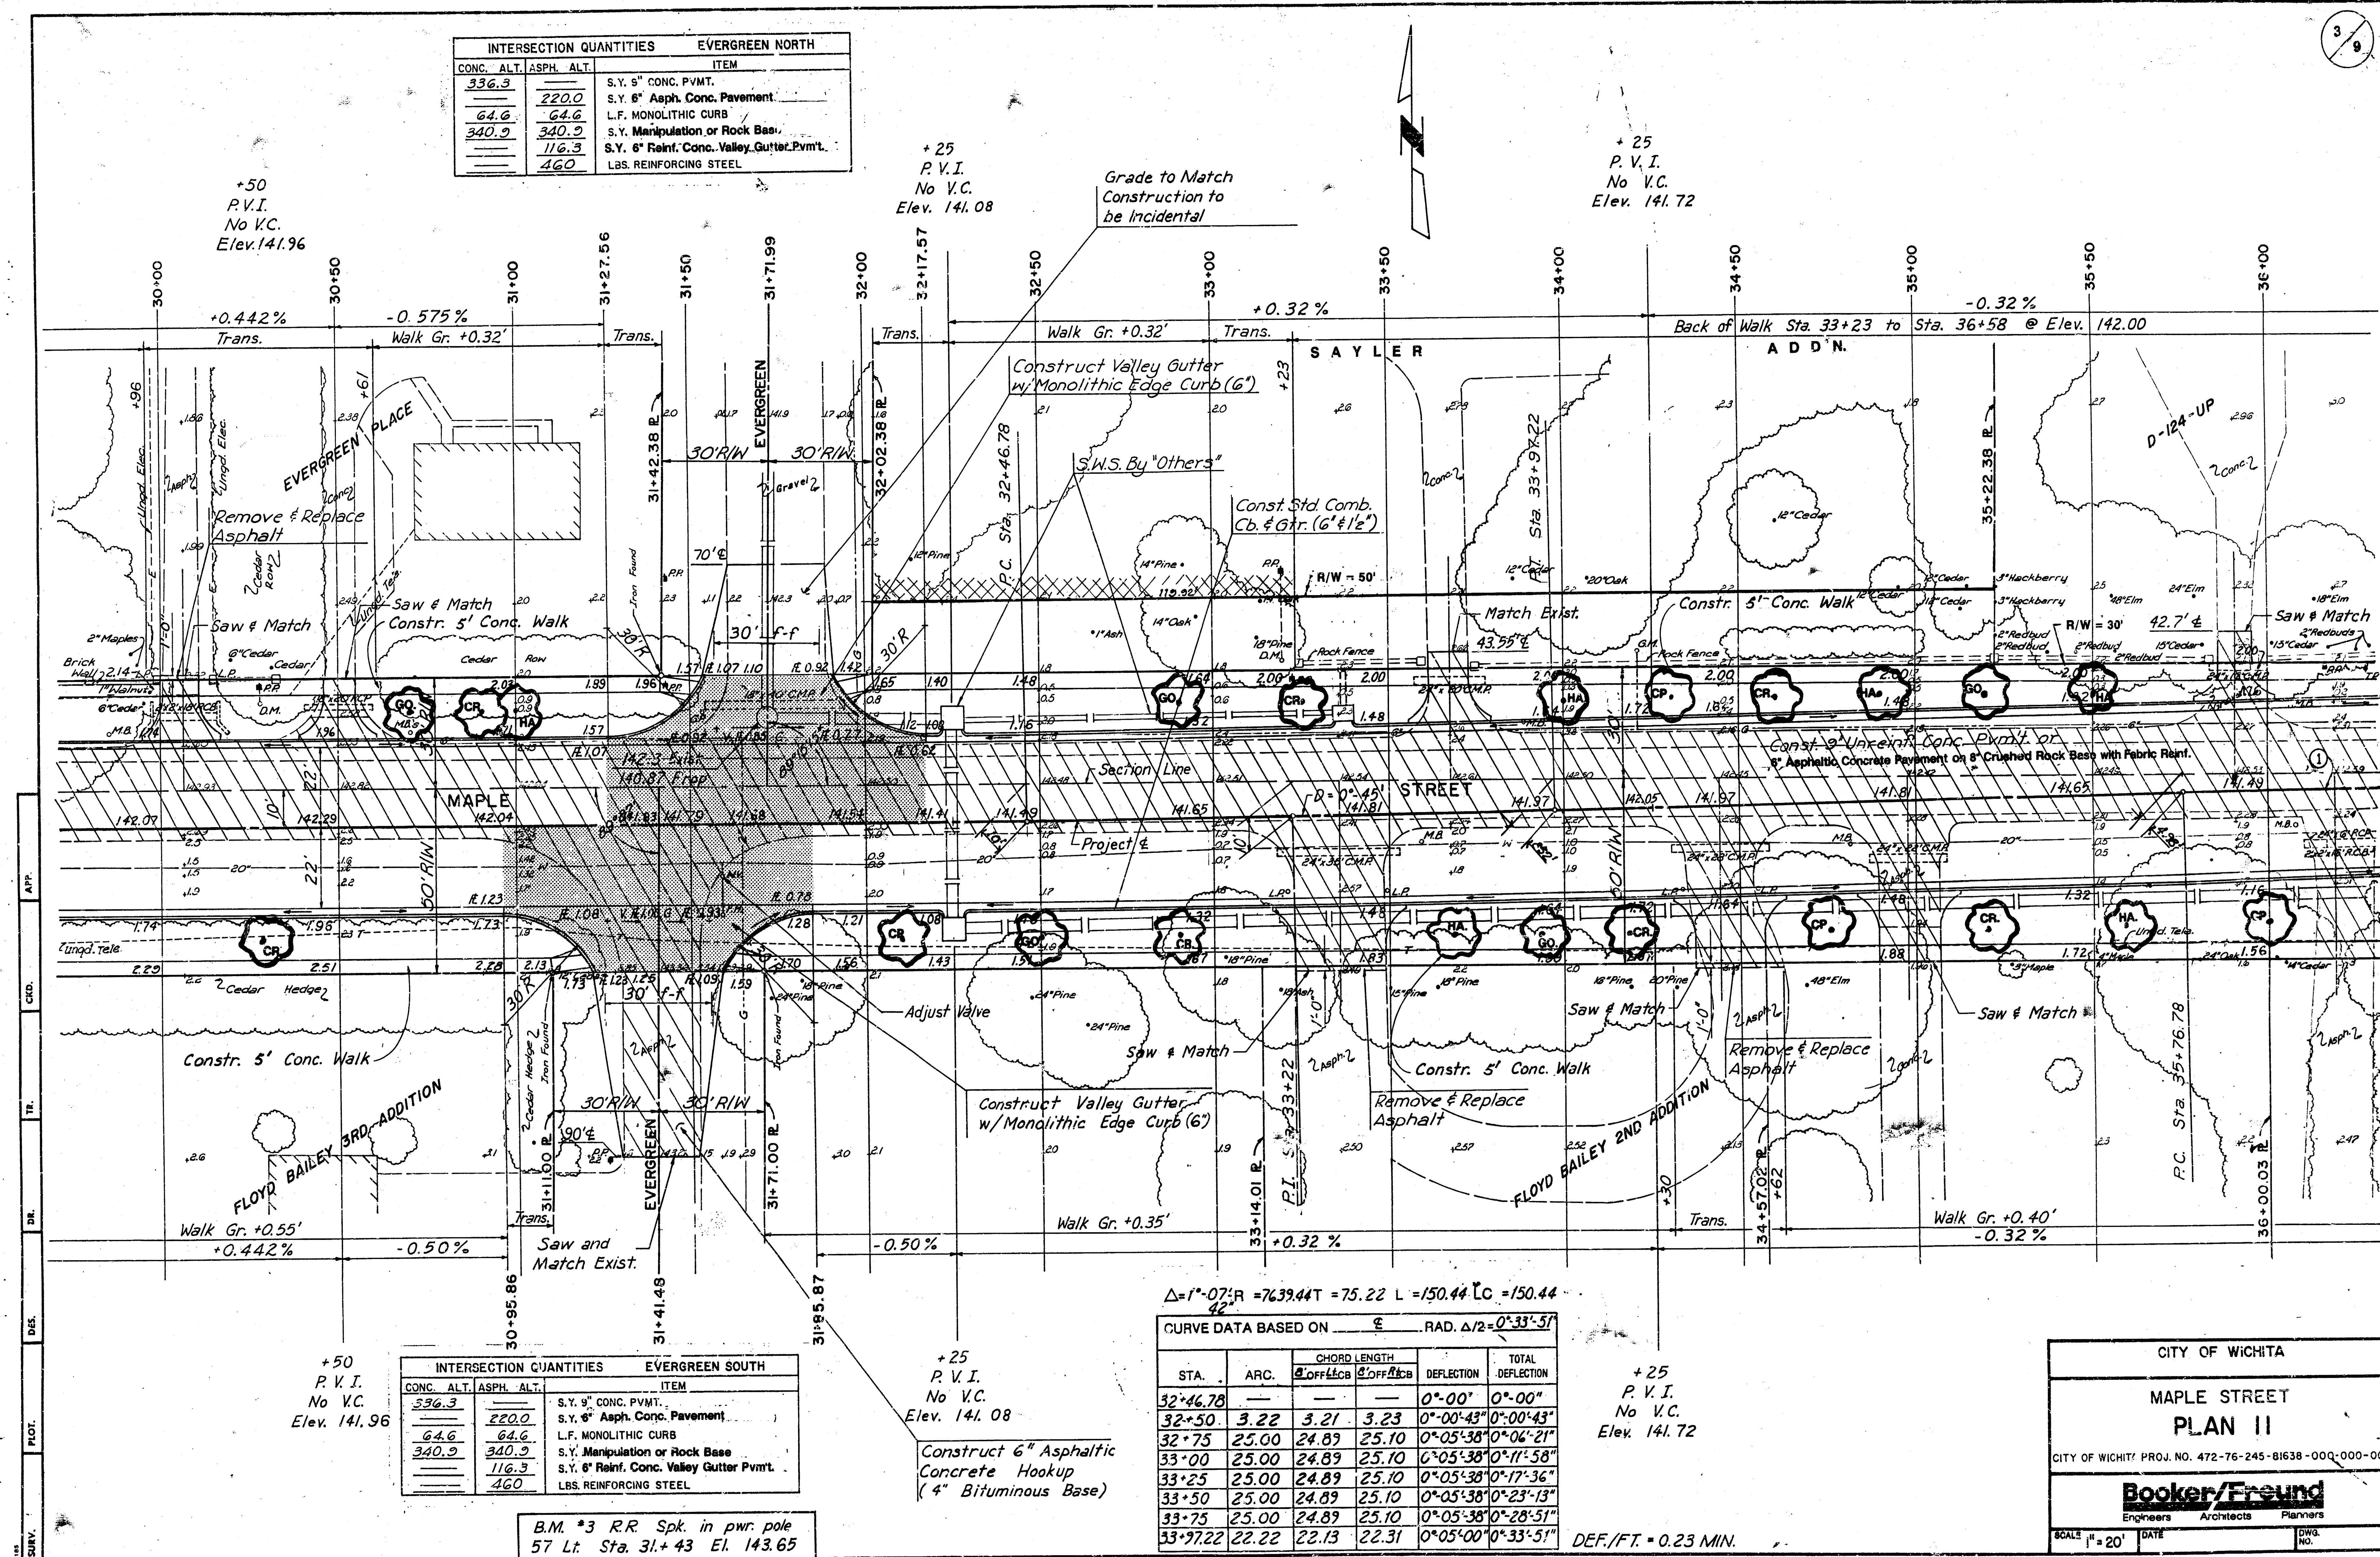

$\Delta = 1^{\circ}07'30''$ $R = 7639.44$ $L = 75.22$ $L = 150.44$ $LC = 150.44$

CURVE DATA BASED ON $\Delta = 1^{\circ}07'30''$ $R = 7639.44$ $L = 75.22$ $L = 150.44$ $LC = 150.44$

STA.	ARC.	CHORD LENGTH	CHORD BEARS	DEFLECTION	TOTAL DEFLECTION
32+46.78					
32+50	3.22	3.21	3.23	0°00'43"	0°00'43"
32+75	25.00	24.89	25.10	0°05'38"	0°06'21"
33+00	25.00	24.89	25.10	0°05'38"	0°11'58"
33+25	25.00	24.89	25.10	0°05'38"	0°17'36"
33+50	25.00	24.89	25.10	0°05'38"	0°23'13"
33+75	25.00	24.89	25.10	0°05'38"	0°28'51"
33+97.22	22.22	22.13	22.31	0°05'00"	0°33'51"

+25
P.V.I.
No V.C.
Elev. 141.72

DEF./FT. = 0.23 MIN.

INTERSECTION QUANTITIES		EVERGREEN SOUTH
CONC.	ALT.	ITEM
336.3	220.0	S.Y. 9" CONC. PVMT.
64.6	64.6	S.Y. 6" Asph. Conc. Pavement
340.9	340.9	L.F. MONOLITHIC CURB
116.3	116.3	S.Y. Manipulation or Rock Base
460	460	S.Y. 6" Reinf. Conc. Valley Gutter Pvm't.
		LBS. REINFORCING STEEL

+50
P.V.I.
No V.C.
Elev. 141.96

+25
P.V.I.
No V.C.
Elev. 141.08

Construct 6" Asphaltic
Concrete Hookup
(4" Bituminous Base)

B.M. *3 R.R. Spk. in pwr. pole
57 Lt. Sta. 31+43 El. 143.65

CITY OF WICHITA

MAPLE STREET
PLAN II

CITY OF WICHITA PROJ. NO. 472-76-245-81638-000-000-001

Booker/Freund

Engineers Architects Planners

SCALE 1" = 20' DATE DWG. NO.


NOTE:
There is to be no construction within an area lying north of the proposed sidewalk from Sta. 36+56 to Sta. 39+54, except as required for entrance driveways.

Construct Valley Gutter w/ Monolithic Edge Curb (6")

Construct 6" Asphaltic Concrete Hookup (4" Bituminous Base)

INTERSECTION QUANTITIES		SOCORA NORTH	
CONC. ALT.	ASPH. ALT.	ITEM	
276.0	171.2	S.Y. 9" CONC. PVMT.	
62.8	62.8	S.Y. 6" Asphaltic Concrete Pavement	
280.5	280.5	L.F. MONOLITHIC CURB	
	104.8	S.Y. Manipulation or Rock Base	
	414	S.Y. 6" Reinf. Conc. Valley Gutter Pavmt.	
		LBS. REINFORCING STEEL	

+36
P.V.I.
No V.C.
Elev. 139.60

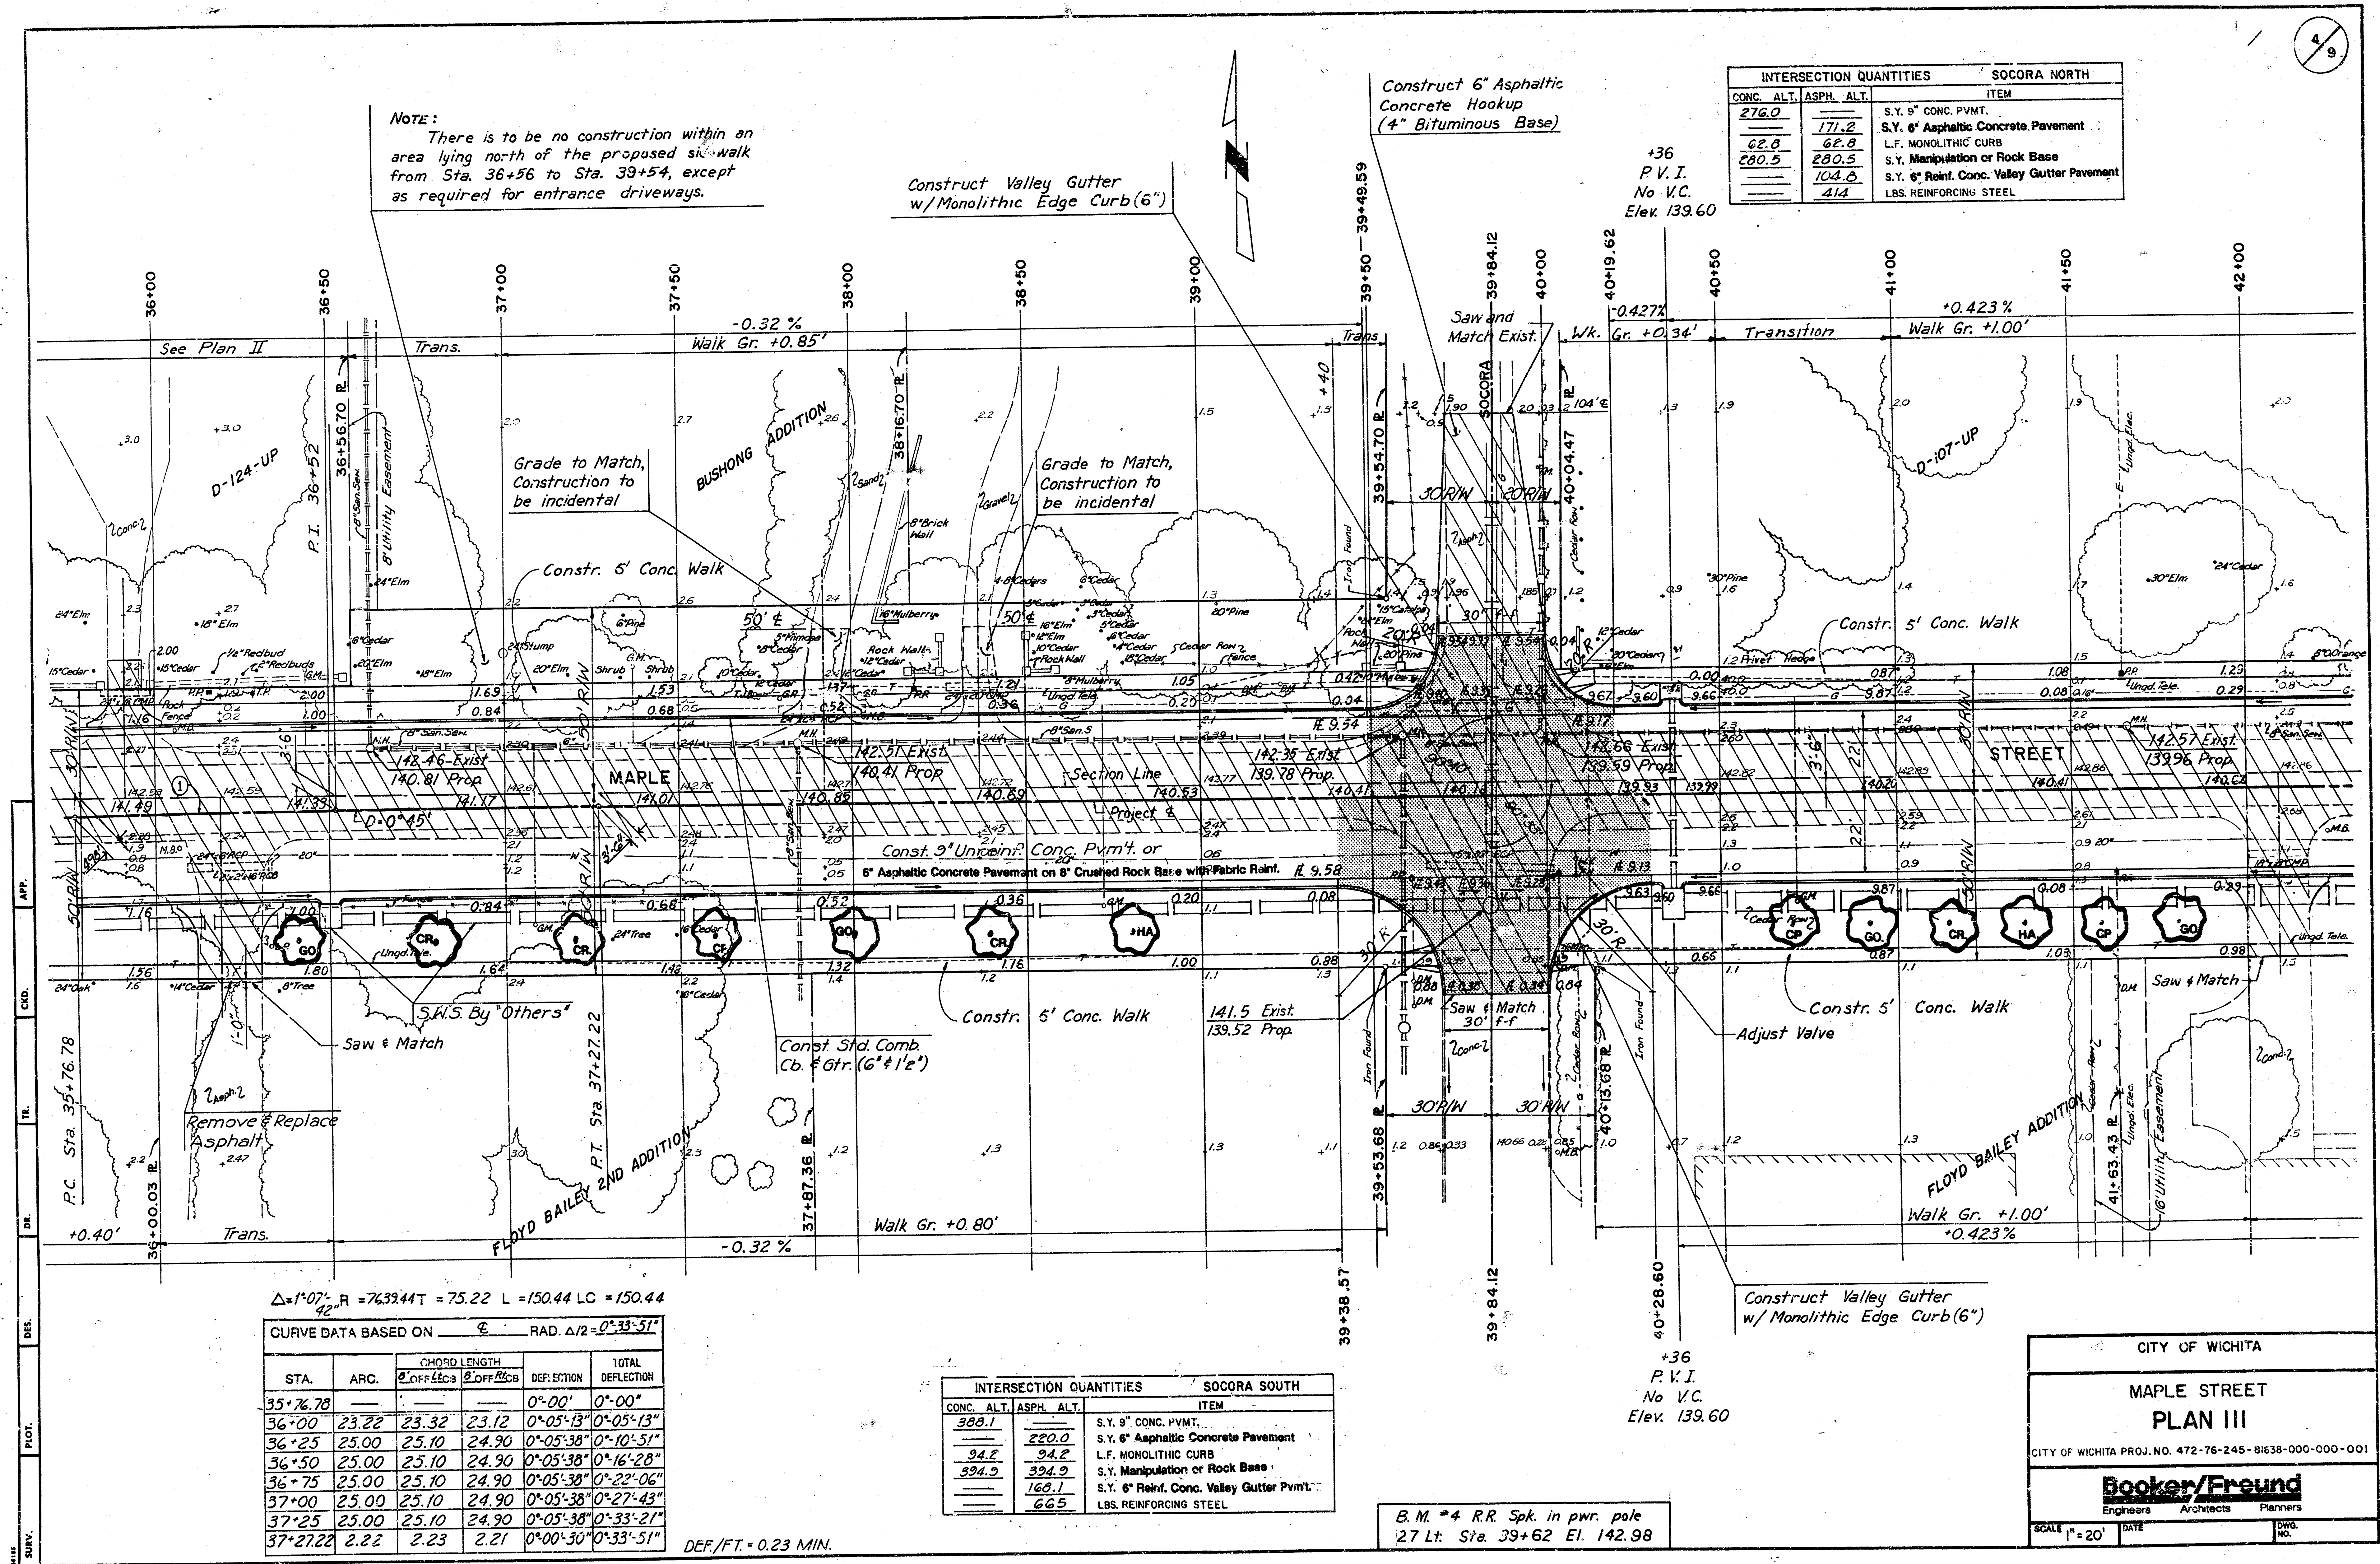

$\Delta=1^{\circ}07'$, R = 7639.44T = 75.22 L = 150.44 LC = 150.44

CURVE DATA BASED ON $\frac{E}{2}$ RAD. $\Delta/2 = 0^{\circ}33'51''$					
STA.	ARC.	CHORD LENGTH	DEFLECTION	TOTAL DEFLECTION	
		$\frac{E}{2}$ OFF ECTS	$\frac{E}{2}$ OFF ECTS		
35+76.78				0°00'	0°00'
36+00	23.22	23.32	23.12	0°05'13"	0°05'13"
36+25	25.00	25.10	24.90	0°05'38"	0°10'51"
36+50	25.00	25.10	24.90	0°05'38"	0°16'28"
36+75	25.00	25.10	24.90	0°05'38"	0°22'06"
37+00	25.00	25.10	24.90	0°05'38"	0°27'43"
37+25	25.00	25.10	24.90	0°05'38"	0°33'21"
37+27.22	2.22	2.23	2.21	0°00'50"	0°33'51"

DEF/FT = 0.23 MIN.

INTERSECTION QUANTITIES		SOCORA SOUTH	
CONC. ALT.	ASPH. ALT.	ITEM	
388.1	220.0	S.Y. 9" CONC. PVMT.	
94.2	94.2	S.Y. 6" Asphaltic Concrete Pavement	
394.9	394.9	L.F. MONOLITHIC CURB	
	168.1	S.Y. Manipulation or Rock Base	
	665	S.Y. 6" Reinf. Conc. Valley Gutter Pavmt.	
		LBS. REINFORCING STEEL	

B.M. #4 R.R. Spk. in pwr. pole
27 Lt. Sta. 39+62 El. 142.98

+36
P.V.I.
No V.C.
Elev. 139.60

Construct Valley Gutter w/ Monolithic Edge Curb (6")

CITY OF WICHITA

MAPLE STREET
PLAN III


CITY OF WICHITA PROJ. NO. 472-76-245-81638-000-001

Booker/Freund
Engineers Architects Planners

SCALE 1" = 20' DATE DWA NO.

NOTE:
There is to be no construction within an area lying north of the proposed sidewalk from Sta. 46+46 to Sta. 51+11.

+25
P.V.I.
90' V.C.
Elev. 142.65

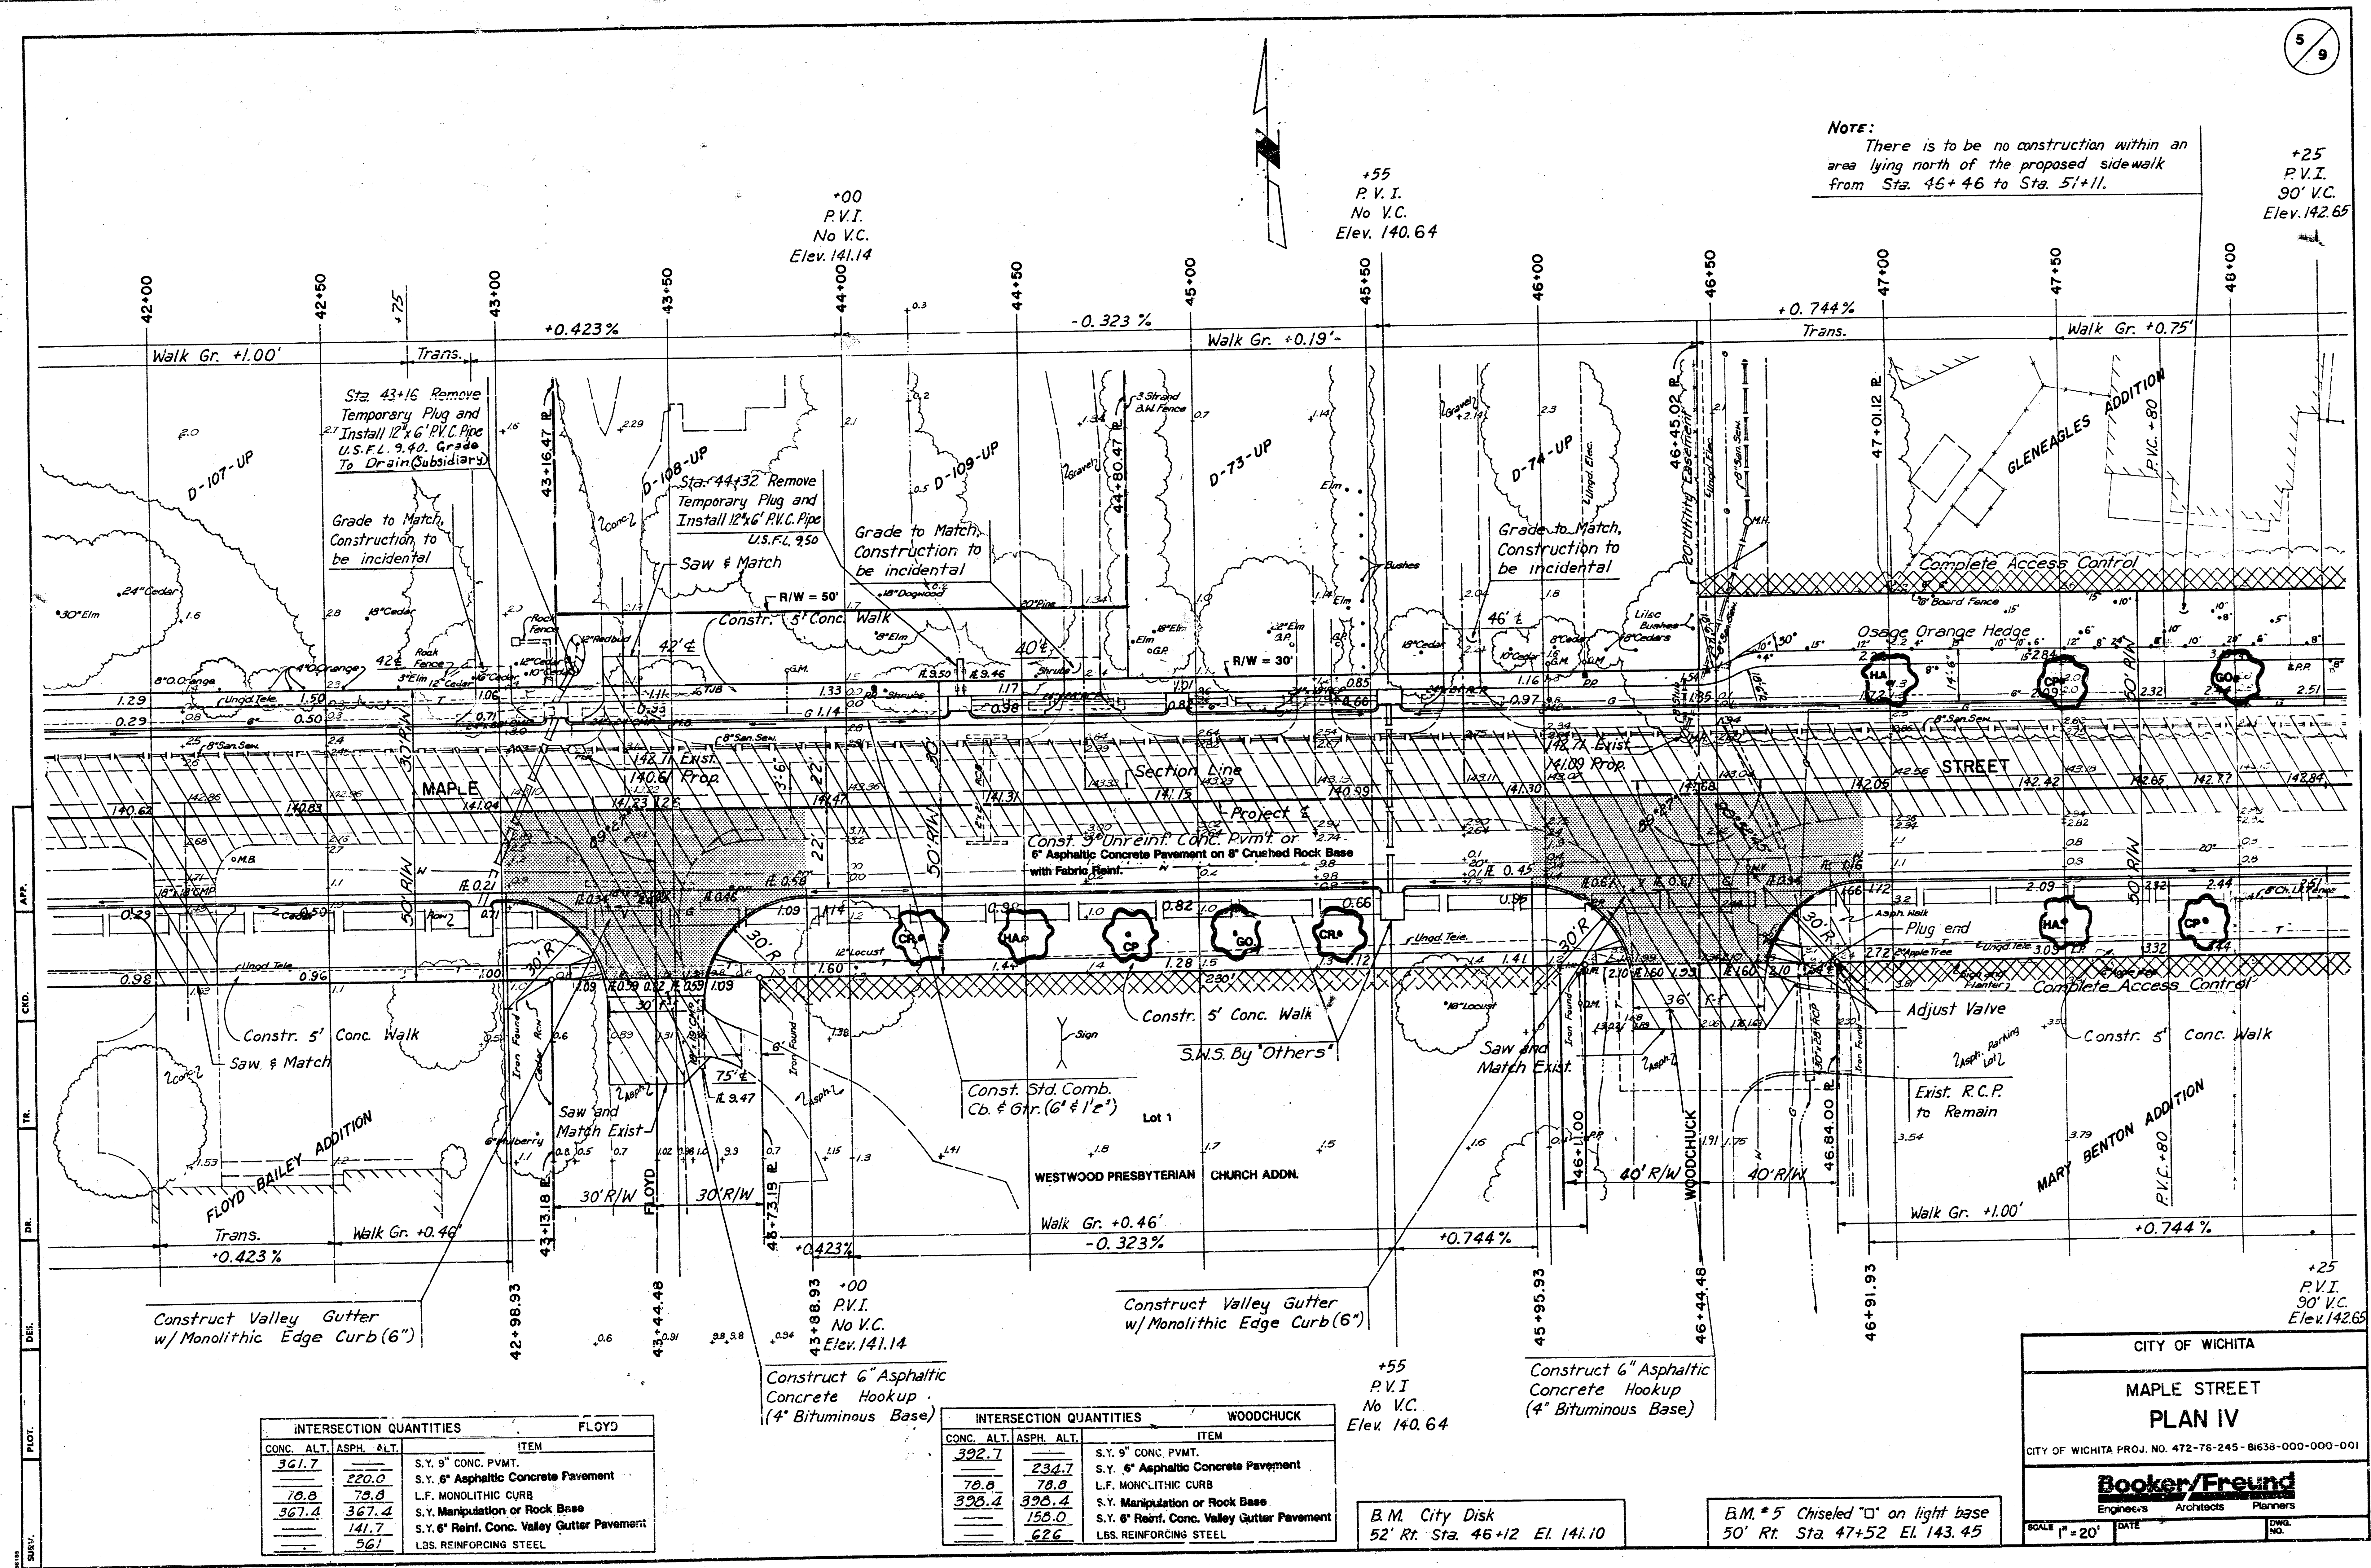

Construct Valley Gutter w/ Monolithic Edge Curb (6")

+00
P.V.I.
No V.C.
Elev. 141.14

Construct 6" Asphaltic Concrete Hookup (4" Bituminous Base)

+55
P.V.I.
No V.C.
Elev. 140.64

Construct 6" Asphaltic Concrete Hookup (4" Bituminous Base)

+25
P.V.I.
90' V.C.
Elev. 142.65

INTERSECTION QUANTITIES			FLOYD
CONC.	ALT.	ASPH.	ALT.
361.7			
	220.0		
78.8			
367.4			
	141.7		
	561		
ITEM			
S.Y. 9" CONC. P.V.M.T.			
S.Y. 6" Asphaltic Concrete Pavement			
L.F. MONOLITHIC CURB			
S.Y. Manipulation or Rock Base			
S.Y. 6" Reinf. Conc. Valley Gutter Pavement			
LBS. REINFORCING STEEL			

INTERSECTION QUANTITIES			WOODCHUCK
CONC.	ALT.	ASPH.	ALT.
392.7			
	234.7		
78.8			
398.4			
	158.0		
	626		
ITEM			
S.Y. 9" CONC. P.V.M.T.			
S.Y. 6" Asphaltic Concrete Pavement			
L.F. MONOLITHIC CURB			
S.Y. Manipulation or Rock Base			
S.Y. 6" Reinf. Conc. Valley Gutter Pavement			
LBS. REINFORCING STEEL			

B.M. City Disk
52' Rr. Sta. 46+12 El. 141.10

B.M. #5 Chiseled "D" on light base
50' Rr. Sta. 47+52 El. 143.45

CITY OF WICHITA

MAPLE STREET
PLAN IV


CITY OF WICHITA PROJ. NO. 472-76-245-81638-000-000-001

Booker/Freund
Engineers Architects Planners

SCALE 1"=20' DATE _____ DWG. NO. _____

[illegible]

INTERSECTION QUANTITIES		ASHLEY PARK
CONC. ALT.	ASPH. ALT.	ITEM
508.1	—	S.Y. 9" Conc. Pavmt'
—	268.9	S.Y. 6" Asph. Conc. Pavement
34.2	94.2	L.F. Monolithic Edge Curb
514.2	514.2	S.Y. Manipulation or Rock Base
—	230.2	S.Y. 6" Reinf. Conc. Valley Gutter Pavmt'
—	105.2	lbs. Reinforcing Steel

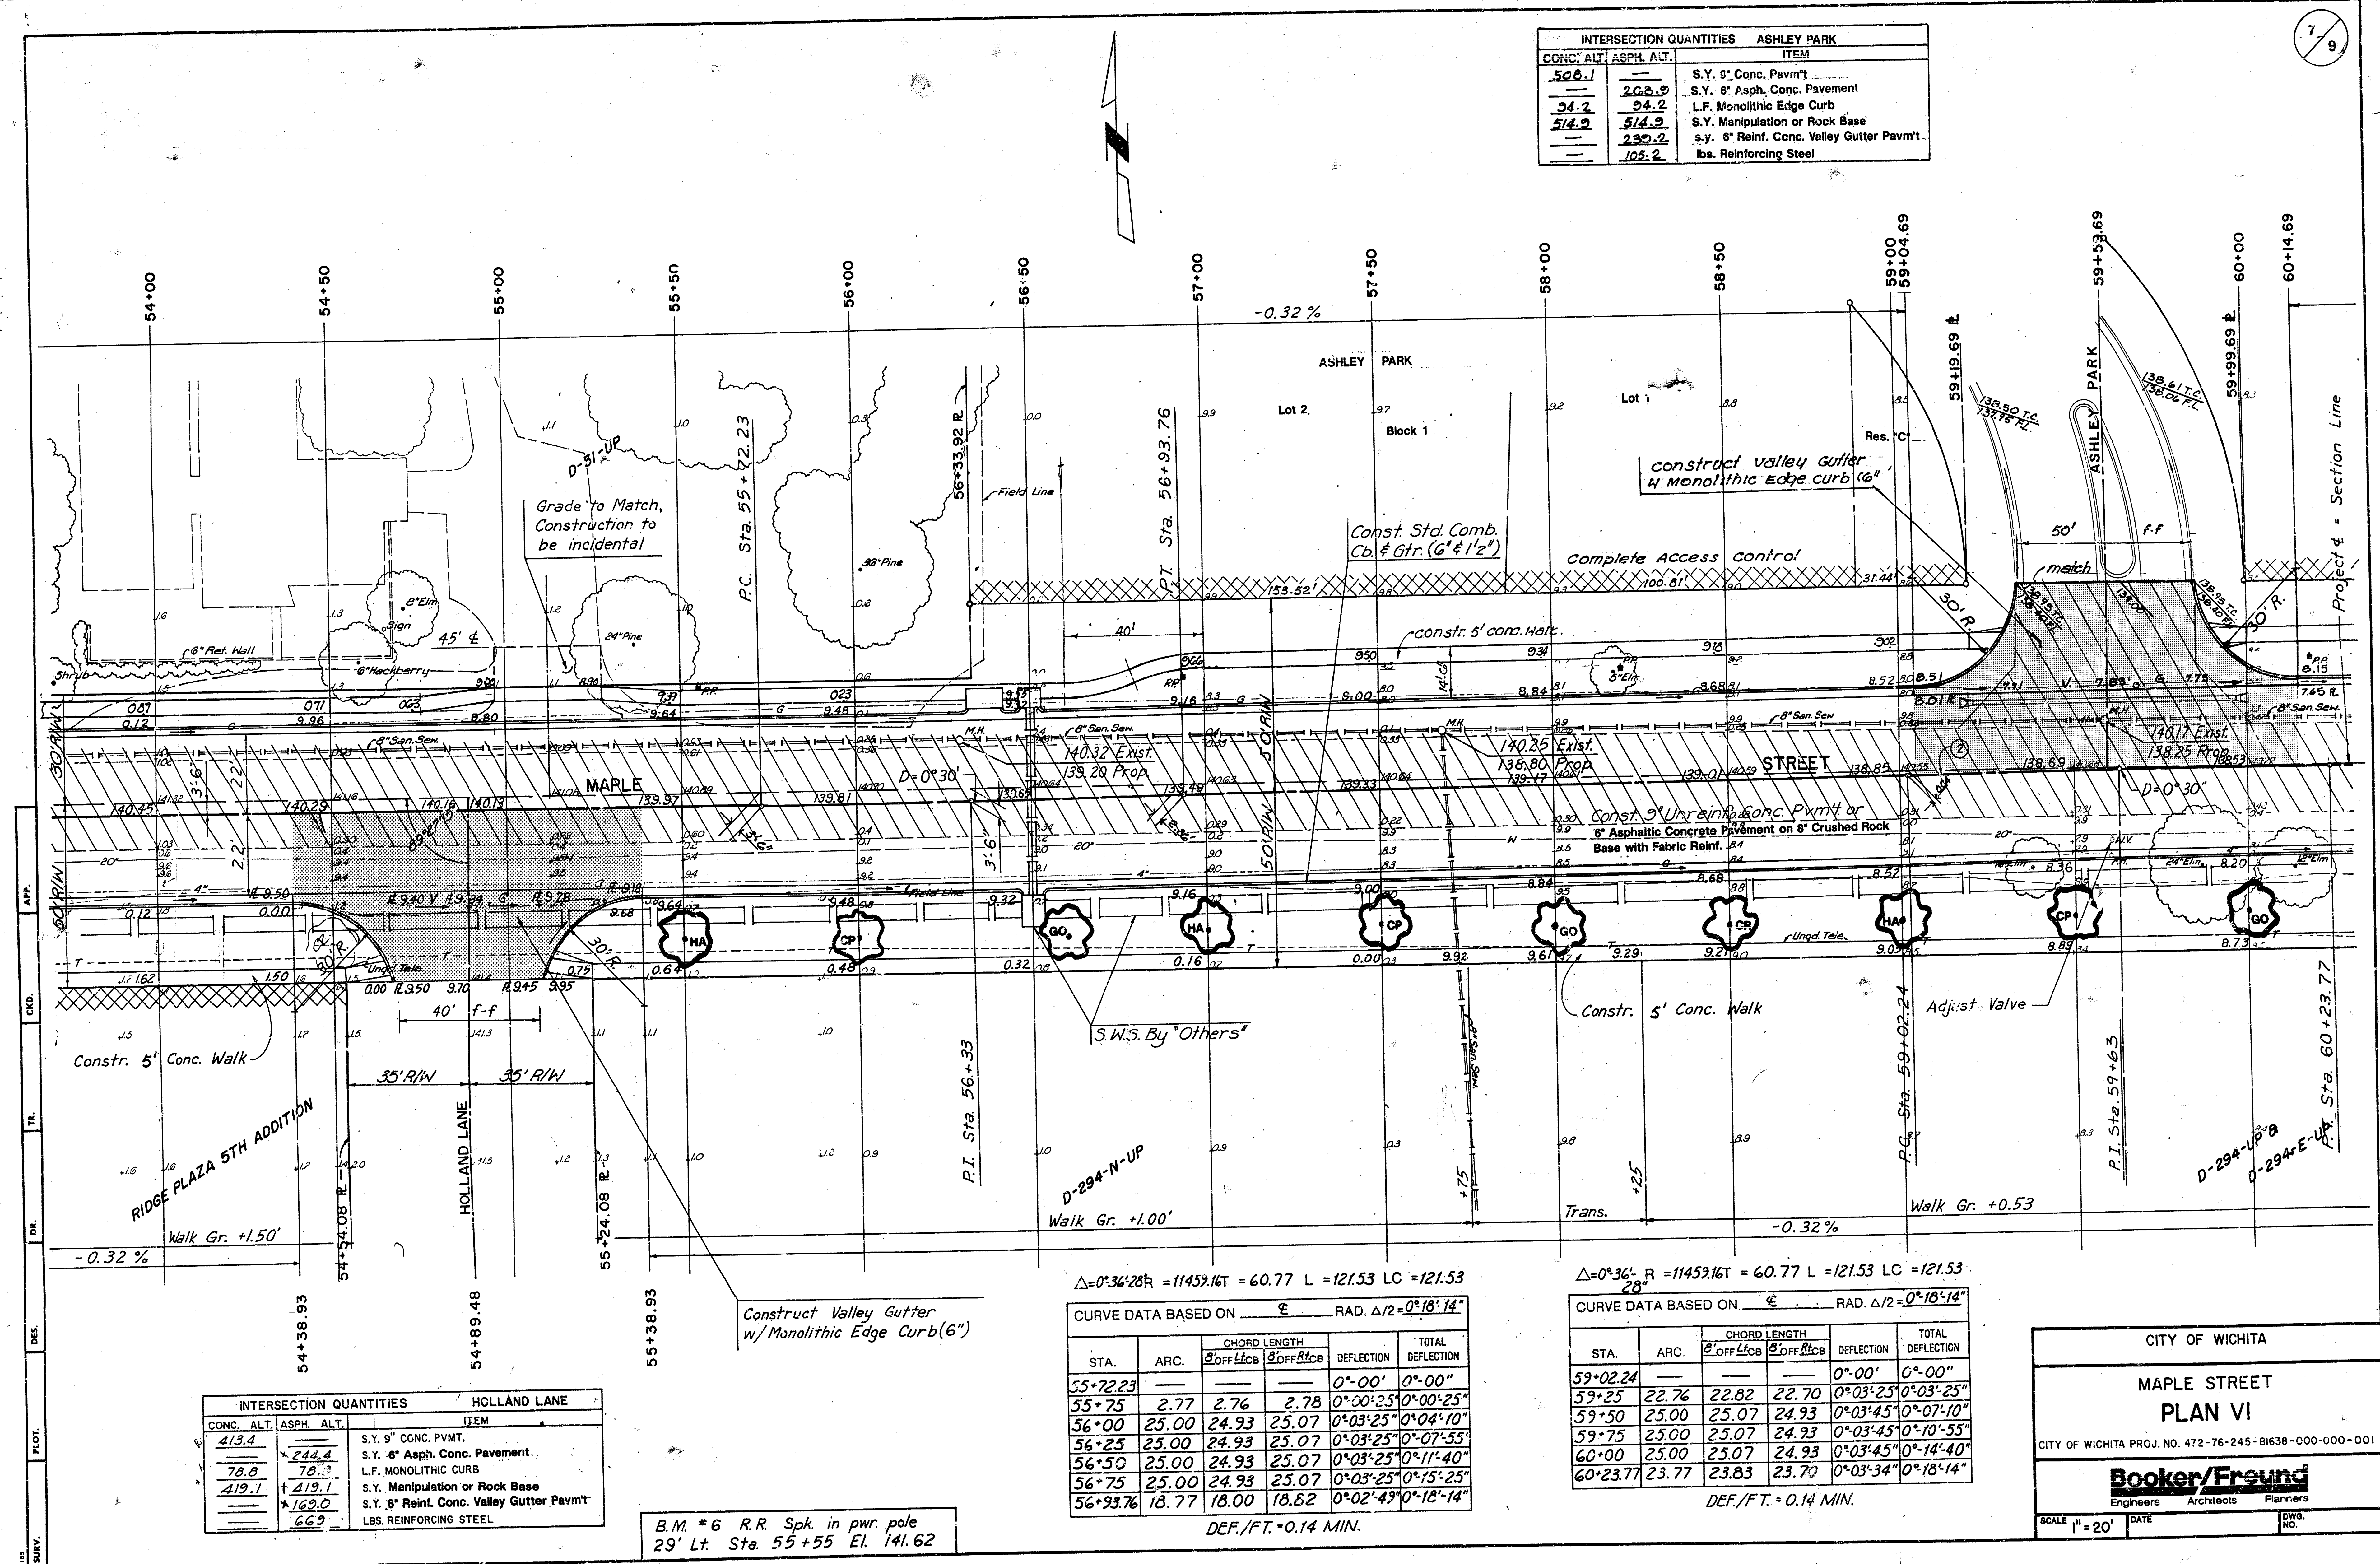

INTERSECTION QUANTITIES		HOLLAND LANE
CONC. ALT.	ASPH. ALT.	ITEM
413.4	—	S.Y. 9" CONC. PVMT.
—	244.4	S.Y. 6" Asph. Conc. Pavment.
78.8	78.8	L.F. MONOLITHIC CURB
419.1	419.1	S.Y. Manipulation or Rock Base
—	169.0	S.Y. 6" Reinf. Conc. Valley Gutter Pavmt'
—	66.9	LBS. REINFORCING STEEL

B.M. #6 R.R. Spk. in pwr. pole
29' Lt. Sta. 55+55 El. 141.62

$\Delta=0^{\circ}36'28''$ R = 11459.16T = 60.77 L = 121.53 LC = 121.53

CURVE DATA BASED ON $\Delta=0^{\circ}36'28''$ RAD. $\Delta/2=0^{\circ}18'14''$

STA.	ARC.	CHORD LENGTH	DEFLECTION	TOTAL DEFLECTION
55+72.23	—	—	0°00'00"	0°00'00"
55+75	2.77	2.76	0°00'25"	0°00'25"
56+00	25.00	24.93	0°03'25"	0°04'10"
56+25	25.00	24.93	0°03'25"	0°07'55"
56+50	25.00	24.93	0°03'25"	0°11'40"
56+75	25.00	24.93	0°03'25"	0°15'25"
56+93.76	18.77	18.00	0°02'49"	0°18'14"

DEF./FT. = 0.14 MIN.

$\Delta=0^{\circ}36'28''$ R = 11459.16T = 60.77 L = 121.53 LC = 121.53

CURVE DATA BASED ON $\Delta=0^{\circ}36'28''$ RAD. $\Delta/2=0^{\circ}18'14''$

STA.	ARC.	CHORD LENGTH	DEFLECTION	TOTAL DEFLECTION
59+02.24	—	—	0°00'00"	0°00'00"
59+25	22.76	22.82	0°03'25"	0°03'25"
59+50	25.00	25.07	0°03'45"	0°07'10"
59+75	25.00	25.07	0°03'45"	0°10'55"
60+00	25.00	25.07	0°03'45"	0°14'40"
60+23.77	23.77	23.83	0°03'34"	0°18'14"

DEF./FT. = 0.14 MIN.

CITY OF WICHITA

MAPLE STREET
PLAN VI

CITY OF WICHITA PROJ. NO. 472-76-245-81638-C00-000-001

Booker/Freund
Engineers Architects Planners

SCALE 1" = 20' DATE _____ DWA. NO. _____

FERTILIZER: A RATIO AND APPLICATION RATE THAT EQUALS OR EXCEEDS THE REQUIRED MINIMUM RATE PER ACRE OF N, P₂O₅, K₂O LISTED IN SUMMARY OF QUANTITIES WILL BE ACCEPTABLE.

10-10-5-e