
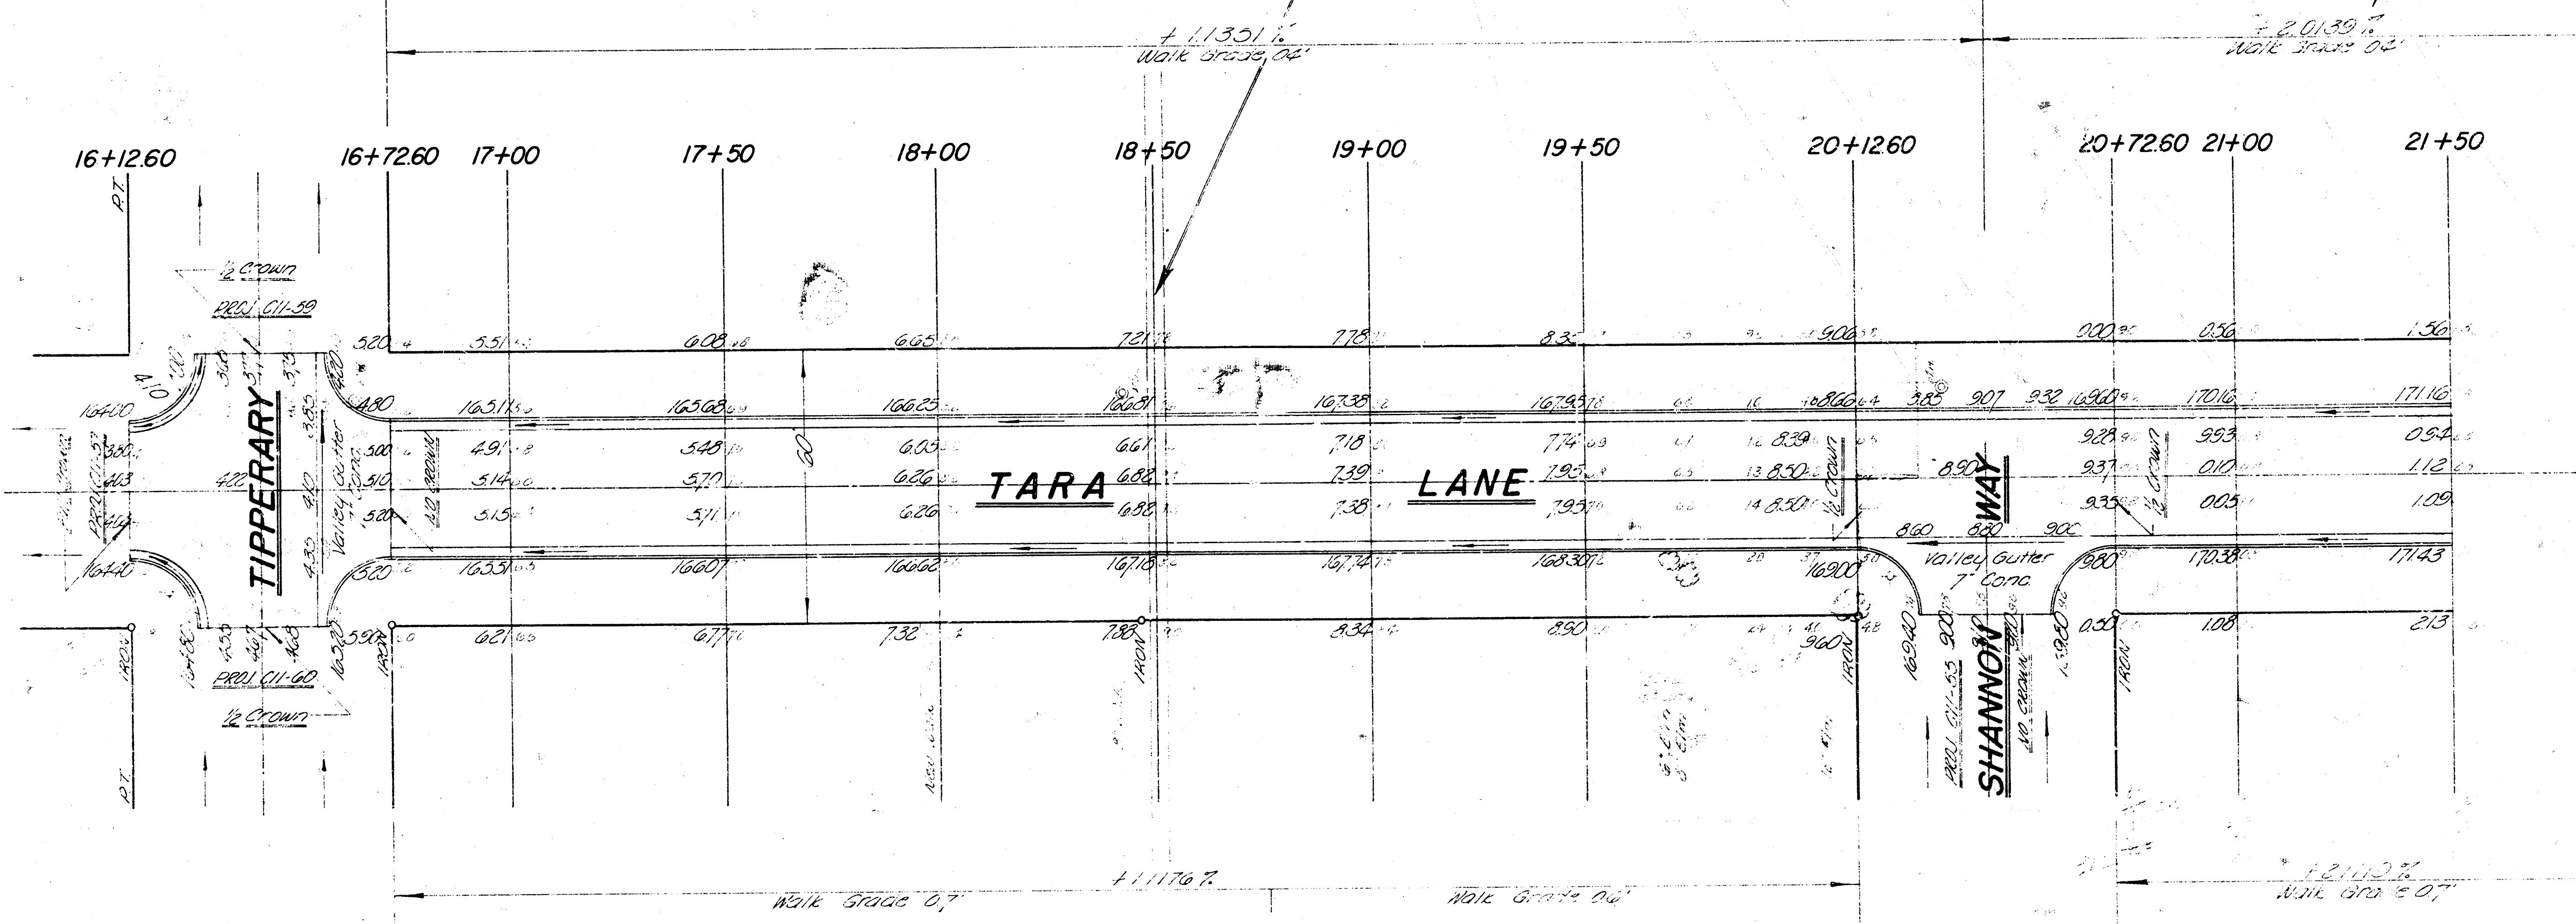


BASELINE TO E. PROPERTY LINE


Note
Use extreme "CAUTION" when
working over H.G. & E. & Bell Conduits.

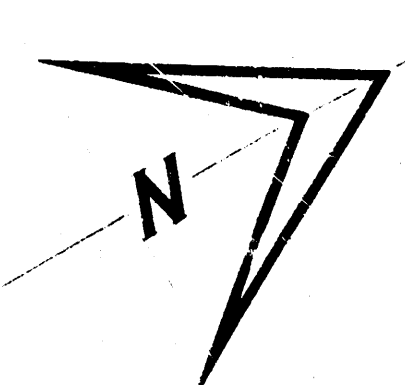

EXCAVATION		COMP. FILL	
1720	156.7	327.5	15.4
1720	157	32.5	1.5
1891.9	172.4	340.3	16.9

TARA LANE
S.L. TIPPERARY TO W.L. LOT 5
26'-2'-30' A.C.
CITY OF WICHITA, KANSAS
B.E. SMITH CITY ENGINEER
DATE: APRIL 1962 PROJ. C11-58

PROJ. BY E. J. JONES

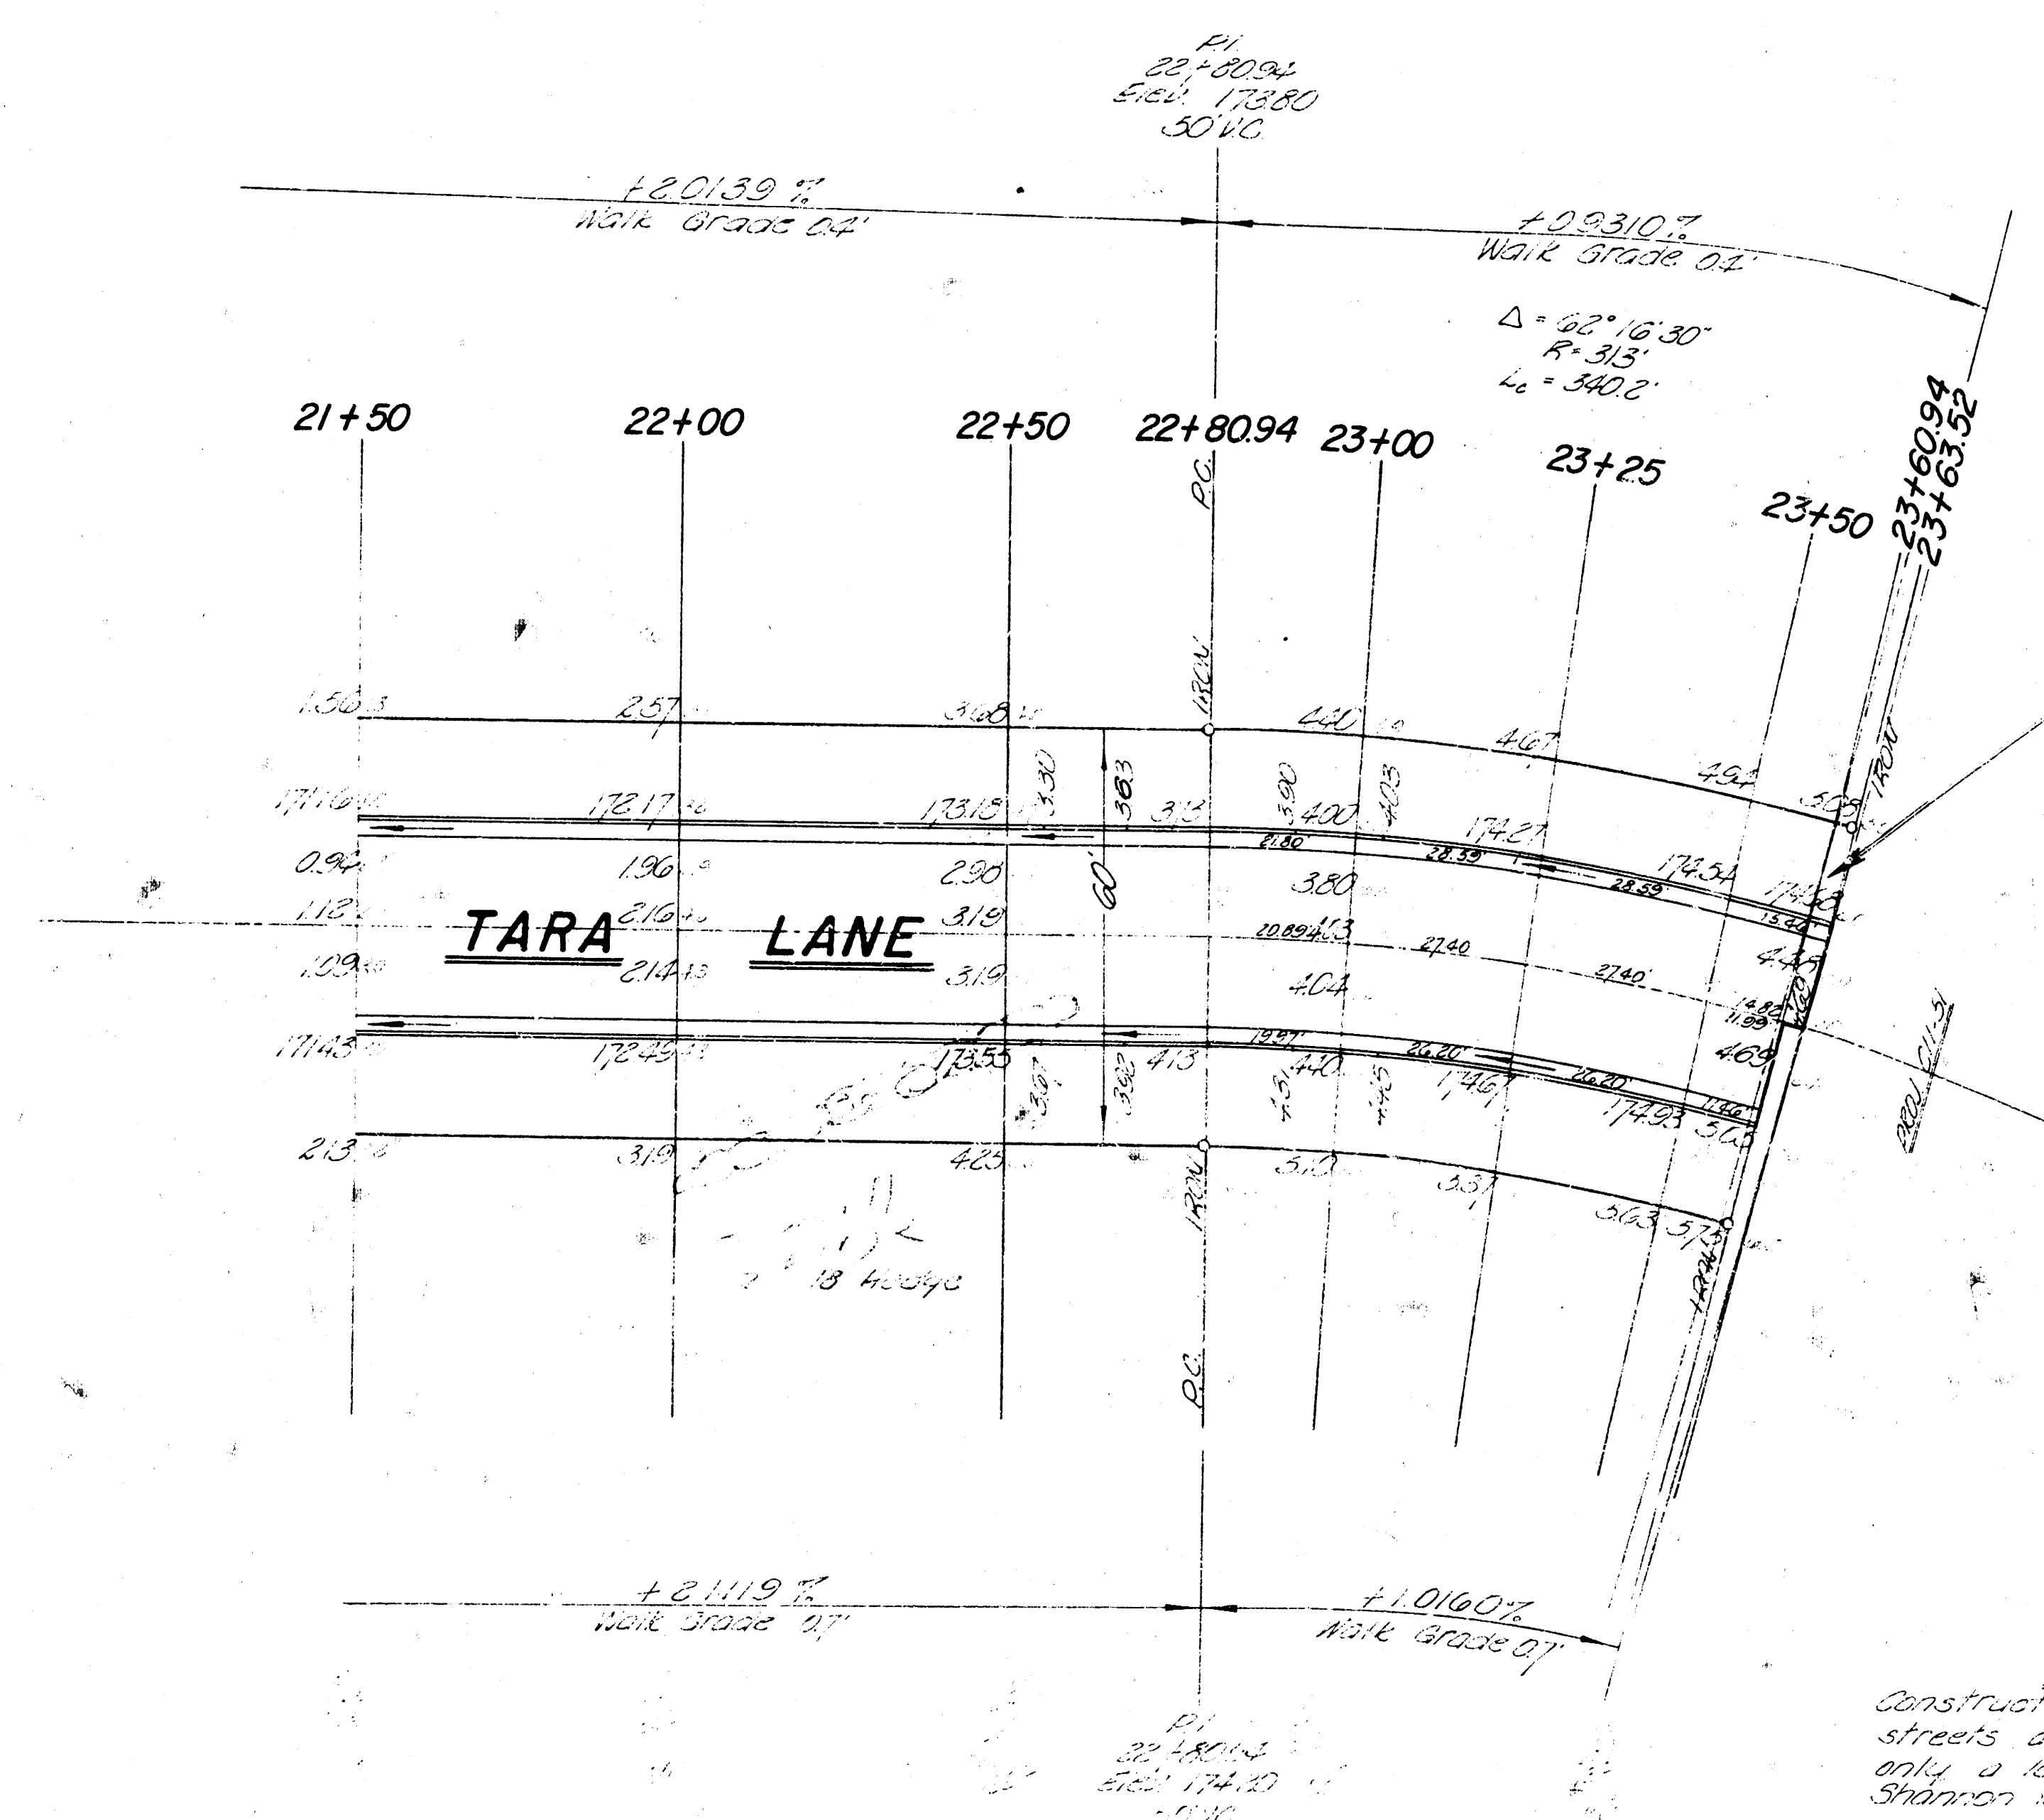

Note
Use extreme **CAUTION** when
working over K&E & Bell Conduits

CURVE DATA					
Radius & S. B. = 310.30' Length = 340.30' Min. per ft. = 3.40%					
Sta	ARC	Chords		Defl.	± Defl.
		3 E	8 1/2 S	8 1/2 W	
22+80.94	190.8	190.8	19.25	22.22	1° 41' 40.0
23+25	2500	24.89	25.55	29.22	4° 01' 57.6
23+50					6° 19' 15.0
23+75					9° 36' 38.4
24+00					12° 53' 49.8
24+25					16° 11' 07.2
24+50					19° 28' 24.6
24+75					22° 45' 42.0
25+00					26° 02' 59.4
25+25					29° 20' 16.8
25+50					32° 37' 34.2
25+75					35° 54' 51.6
26+00	2500	24.89	25.55	29.22	25° 12' 00.0
26+25	2114	21.14	21.61	24.70	3° 10' 15.0

INTERSECTION NOTE:
Construct intersections as shown unless cross
streets are being paved at same time. Use
only a 10' valley gutter section (T'one) if
Shannon is paved at same time as this project.