

**PAVING MODIFICATIONS IN CONNECTION WITH
RUBBERIZATION OF RAILROAD CROSSING
AT 13 TH ST. NO. AND MEAD**

**PROJ. NO. 828-70-286-50219-430-000-000
CONSTRUCTION CONTRACT COSTS**

**PROJ. NO. 828-70-286-50219-110-000-000
CONSTRUCTION INSPECTION COSTS**

CITY OF WICHITA, KANSAS

M. E. LINDEBAK - CITY ENGINEER


INDEX

<i>TITLE SHEET</i>	<i>SHEET 1</i>
<i>LETTERS</i>	<i>SHEET 2</i>
<i>PLAN</i>	<i>SHEET 3</i>

GENERAL NOTES

1. TWO LANES OF THROUGH TRAFFIC SHALL BE MAINTAINED, ONE IN EACH DIRECTION, DURING THE INSTALLATION OF RUBBERIZED CROSSING MATERIAL, REMOVAL OF EXISTING PAVEMENT, AND RECONSTRUCTION OF NEW PAVEMENT UNLESS THE CITY ELECTS TO NOT REQUIRE SUCH THROUGH TRAFFIC TO BE CARRIED DURING CONSTRUCTION. CONSTRUCTION SIGNING AND CONSTRUCTION OF TEMPORARY PAVEMENT REQUIRED TO FACILITATE MAINTENANCE OF SUCH THROUGH TRAFFIC WILL BE THE RESPONSIBILITY OF THE PAVING CONTRACTOR AS FURTHER PROMULGATED BY PROJECT SPECIAL PROVISIONS.

2. SAWED JOINT NECESSARY TO FACILITATE PAVEMENT REMOVAL WILL NOT BE PAID FOR DIRECTLY AND THIS COST SHALL BE CONSIDERED AS SUBSIDIARY TO THE OTHER PAY ITEMS OF WORK IN THE CONTRACT.

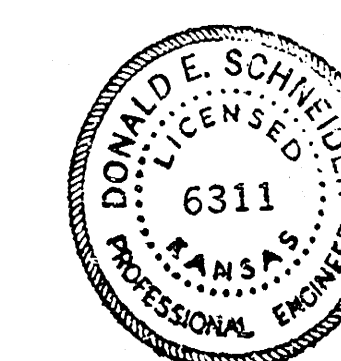

RUBBERIZED CROSSING MATERIAL SUPPLIER SHALL FURNISH ALL MATERIALS AND FASTENERS NECESSARY TO PROPERLY INSTALL THE RUBBERIZED CROSSING, INCLUDING RUBBER TIE SHIM CAP BOARD, AND ANY OTHER INCIDENTALS NECESSARY TO COMPLETE THE INSTALLATION. ALL SUCH MATERIALS SUPPLIED BY THE RUBBERIZED CROSSING MANUFACTURER SHALL BE INSTALLED BY THE INVOLVED RAILROAD COMPANY IN ACCORDANCE WITH THE RECOMMENDATIONS OF THE MATERIAL SUPPLIER.

INDIVIDUAL PIECES OF RUBBER CAR BOARD SHALL NOT BE LESS THAN SIX (6) FEET LONG EXCEPT WHEN NECESSARY TO FURNISH SHORTER PIECES TO MATCH THE RUBBERIZED CROSSING LENGTH. SHORTER LENGTHS OF INDIVIDUAL RUBBER CAR BOARD PIECES SHALL NOT BE LESS THAN THREE (3) FEET. RUBBER CAR BOARDS SHALL BE INSTALLED SUCH THAT WHEN THE ABUTTING PAVEMENT IS COMPLETED THERE WILL BE SMOOTH VERTICAL SURFACES FORMED AT THE JUNCTURE BETWEEN THE PAVEMENT AND RUBBER CAR BOARD FOR THE FULL DEPTH OF THE PAVEMENT WITHOUT ANY PAVEMENT COMING INTO DIRECT CONTACT WITH THE RAILROAD CROSSING TIES. ONE THICKNESS OF TARPAPER SHALL BE INSTALLED BY THE PAVING CONTRACTOR ON ALL MATING SURFACES BETWEEN THE PAVEMENT AND THE RAILROAD CROSSING MATERIAL TO BREAK ANY BOND BETWEEN THE PAVEMENT AND THE RAILROAD CROSSING MATERIAL.


LOCATION OF RUBBER TIE SHIM CAP BOARD AS SHOWN ON DETAIL DRAWING WILL REQUIRE INSTALLATION OF REDWOOD SHIMS ON THE ENDS OF RAILROAD CROSS TIES WHICH ARE LESS THAN 4' - 3" FOR 8' - 6" TIES AND 4' - 6" FOR 9' - 0" TIES FROM CENTERLINE OF THE TRACK. LOCATION OF RUBBER TIE SHIM CAP BOARD AS SHOWN ON DETAIL DRAWING WILL ALSO REQUIRE ENDS OF RAILROAD CROSS TIES BE CUT OFF WHERE ENDS OF SUCH TIES ARE MORE THAN 4' - 3" FOR 8' - 6" TIES AND 4' - 6" FOR 9' - 0" TIES FROM THE CENTERLINE OF THE TRACK.

EXISTING PAVEMENT SHALL BE REMOVED BY THE PAVING CONTRACTOR. PAVEMENT IMMEDIATELY ADJACENT TO THE CROSSING SHALL BE REMOVED PRIOR TO THE INSTALLATION OF NEW RAILROAD CROSSING MATERIALS. PAVING CONTRACTOR SHALL COORDINATE THE PAVEMENT REMOVAL AT EACH CROSSING LOCATION WITH THE INVOLVED RAILROAD COMPANY. ALL EXPOSED JOINTS BETWEEN NEW CONSTRUCTION AND EXISTING PAVEMENT, WALK OR DRIVES SHALL BE TO NEAT LINES FORMED EITHER BY SAW CUT OR EXISTING JOINT.

LENGTHS OF RUBBERIZED CROSSING MATERIAL SHOWN ON THE PLANS IN MOST CASES ARE TO EXTEND THREE (3) FEET BEYOND BOTH SIDES OF THE PAVED MAIN TRAFFICWAY AT EACH LOCATION. WOOD PLANKING SHALL BE INSTALLED BY THE INVOLVED RAILROAD COMPANY OUTSIDE THE LIMITS OF THE RUBBERIZED INSTALLATION FOR SIDEWALK, DRIVEWAY AND OTHER CROSSINGS WHERE NECESSARY. THE INVOLVED RAILROAD COMPANIES SHALL ADJUST THEIR RAILS TO ELEVATIONS AS SHOWN ON THE PLANS FOR EACH CROSSING LOCATION. VARIATIONS FROM THE TOP OF RAIL ELEVATIONS SHOWN WILL BE PERMITTED ONLY WHEN APPROVED BY THE FIELD ENGINEER FOR ANTICIPATED TRACK SETTLEMENT.

SURFACE OF NEW PAVEMENT AND RUBBERIZED CROSSING MATERIAL SHALL BE SET TO IDENTICAL ELEVATIONS AT THEIR POINT OF JUNCTURE ONLY WHEN THE RAILROAD COMPANY USES APPROVED MECHANICAL EQUIPMENT TO COMPACT RAILROAD FILL AND BALLAST SUCH TO PRECLUDE TRACK SETTLEMENT. RAILROAD CROSSING MATERIAL SHALL BE PLACED IN A MINIMUM OF ONE-FOURTH (1/4) INCH TO ONE (1) INCH ELEVATIONS OR PAVEMENT ELEVATIONS SHALL BE DETERMINED BY THE RAILROAD COMPANY. THE RAILROAD COMPANY SHALL ALLOW FOR TRACK SETTLEMENT WHEN THE RAILROAD COMPANY USES HAND METHODS FOR COMPACTION OF RAILROAD FILL AND BALLAST OR USES OTHER COMPACTION METHODS WHICH MAY NOT PRECLUDE TRACK SETTLEMENT. THE EXACT ELEVATION DIFFERENTIAL BETWEEN CROSSING MATERIAL AND PAVEMENT SHALL BE DETERMINED BY THE RAILROAD BASED ON THE ELEVATION FOR TRACK SETTLEMENT WITH CONCURRENCE BY THE ENGINEER.

INDIVIDUAL SECTIONS OF THE RUBBERIZED CROSSING MATERIAL SHALL BE OFFSET AT LEAST ONE TIE SPACE FROM EACH OTHER SUCH THAT THE ENDS OF THE RUBBERIZED CROSSING WILL MORE CLOSELY CONFORM TO SIDEWALK OR PAVEMENT CURB ALIGNMENTS WHERE RAILROAD CROSSINGS ARE SKEWED THIRTY (30) DEGREES OR MORE TO THE STREET.

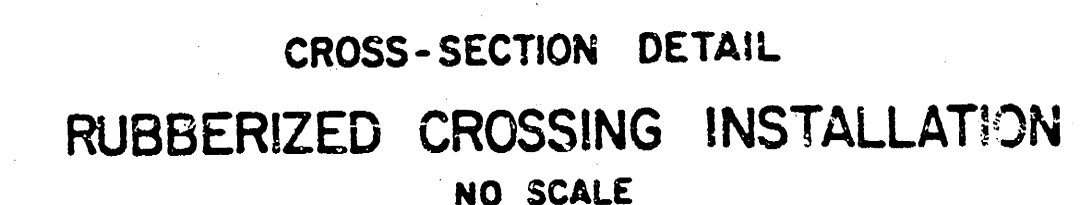

NOTE: ONE THICKNESS OF TAR PAPER SHALL BE INSTALLED BY PAVING CONTRACTOR ON ALL MATING SURFACES BETWEEN PAVEMENT AND RAILROAD CROSSING MATERIAL TO BREAK ANY BOND BETWEEN PAVEMENT AND RAILROAD CROSSING MATERIAL.

EXISTING PLANK OR OTHER TYPE OF RAILROAD CROSSING TO BE REMOVED BY RAILROAD.

Symm. About C

4'-6" ± TO C TRACK

TIE

BOTTOM OF EXISTING PAVEMENT



PAVING CONTRACTOR TO REMOVE EXISTING STREET PAVEMENT AND CONCRETE HEADER AS SHOWN. VOID LEFT BY REMOVAL OF HEADER TO BE FILLED TO BOTTOM OF PROPOSED PAVEMENT REPLACEMENT WITH COMPACTED ROCK BALLAST MATERIAL BY RAILROAD. REMOVAL OF HEADER FULL DEPTH BELOW BOTTOM OF PAVEMENT WILL BE PAID FOR AT THE UNIT PRICE BID FOR RAILROAD HEADER REMOVED.

[illegible]


NOTE: COST OF EXTRATHICKNESS AT RAILROAD CROSSING TO BE SUBSIDIARY TO PRICE BID PER SQ. FT. OF SIDEWALK OR DRIVEWAY.

NOTE: ONE THICKNESS OF TAR PAPER SHALL BE INSTALLED BY PAVING CONTRACTOR ON ALL MATING SURFACES BETWEEN SIDEWALK OR DRIVEWAY CONSTRUCTION AND RAILROAD CROSSING MATERIAL TO BREAK ANY BOND BETWEEN THE SIDEWALK OR DRIVEWAY PAVEMENT AND RAILROAD CROSSING MATERIAL.


CITY OF WICHITA, KANSAS STANDARDS FOR:
RUBBERIZED RAILROAD CROSSING INSTALLATION DETAILS
 AT LOCATIONS: WHERE ALL EXISTING ABUTTING PAVEMENT IS
 REMOVED AND RECONSTRUCTED
 8" REINFORCED CONCRETE PAVEMENT

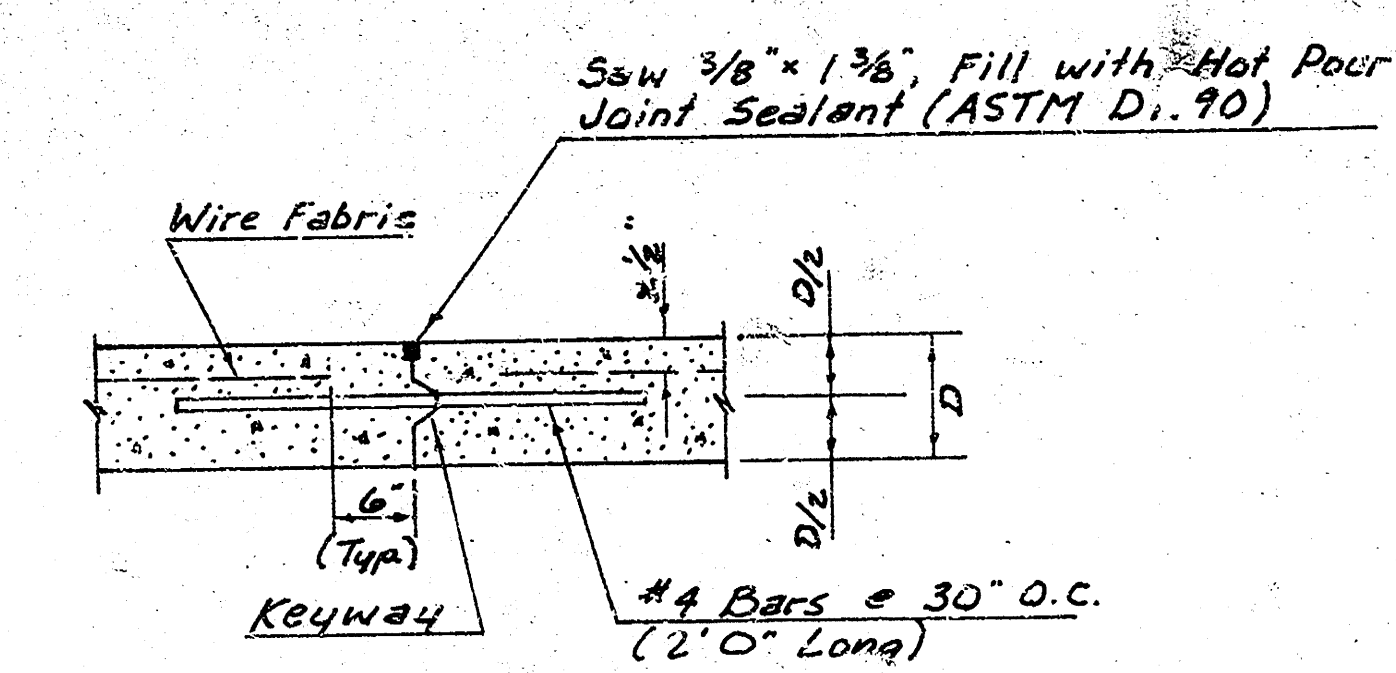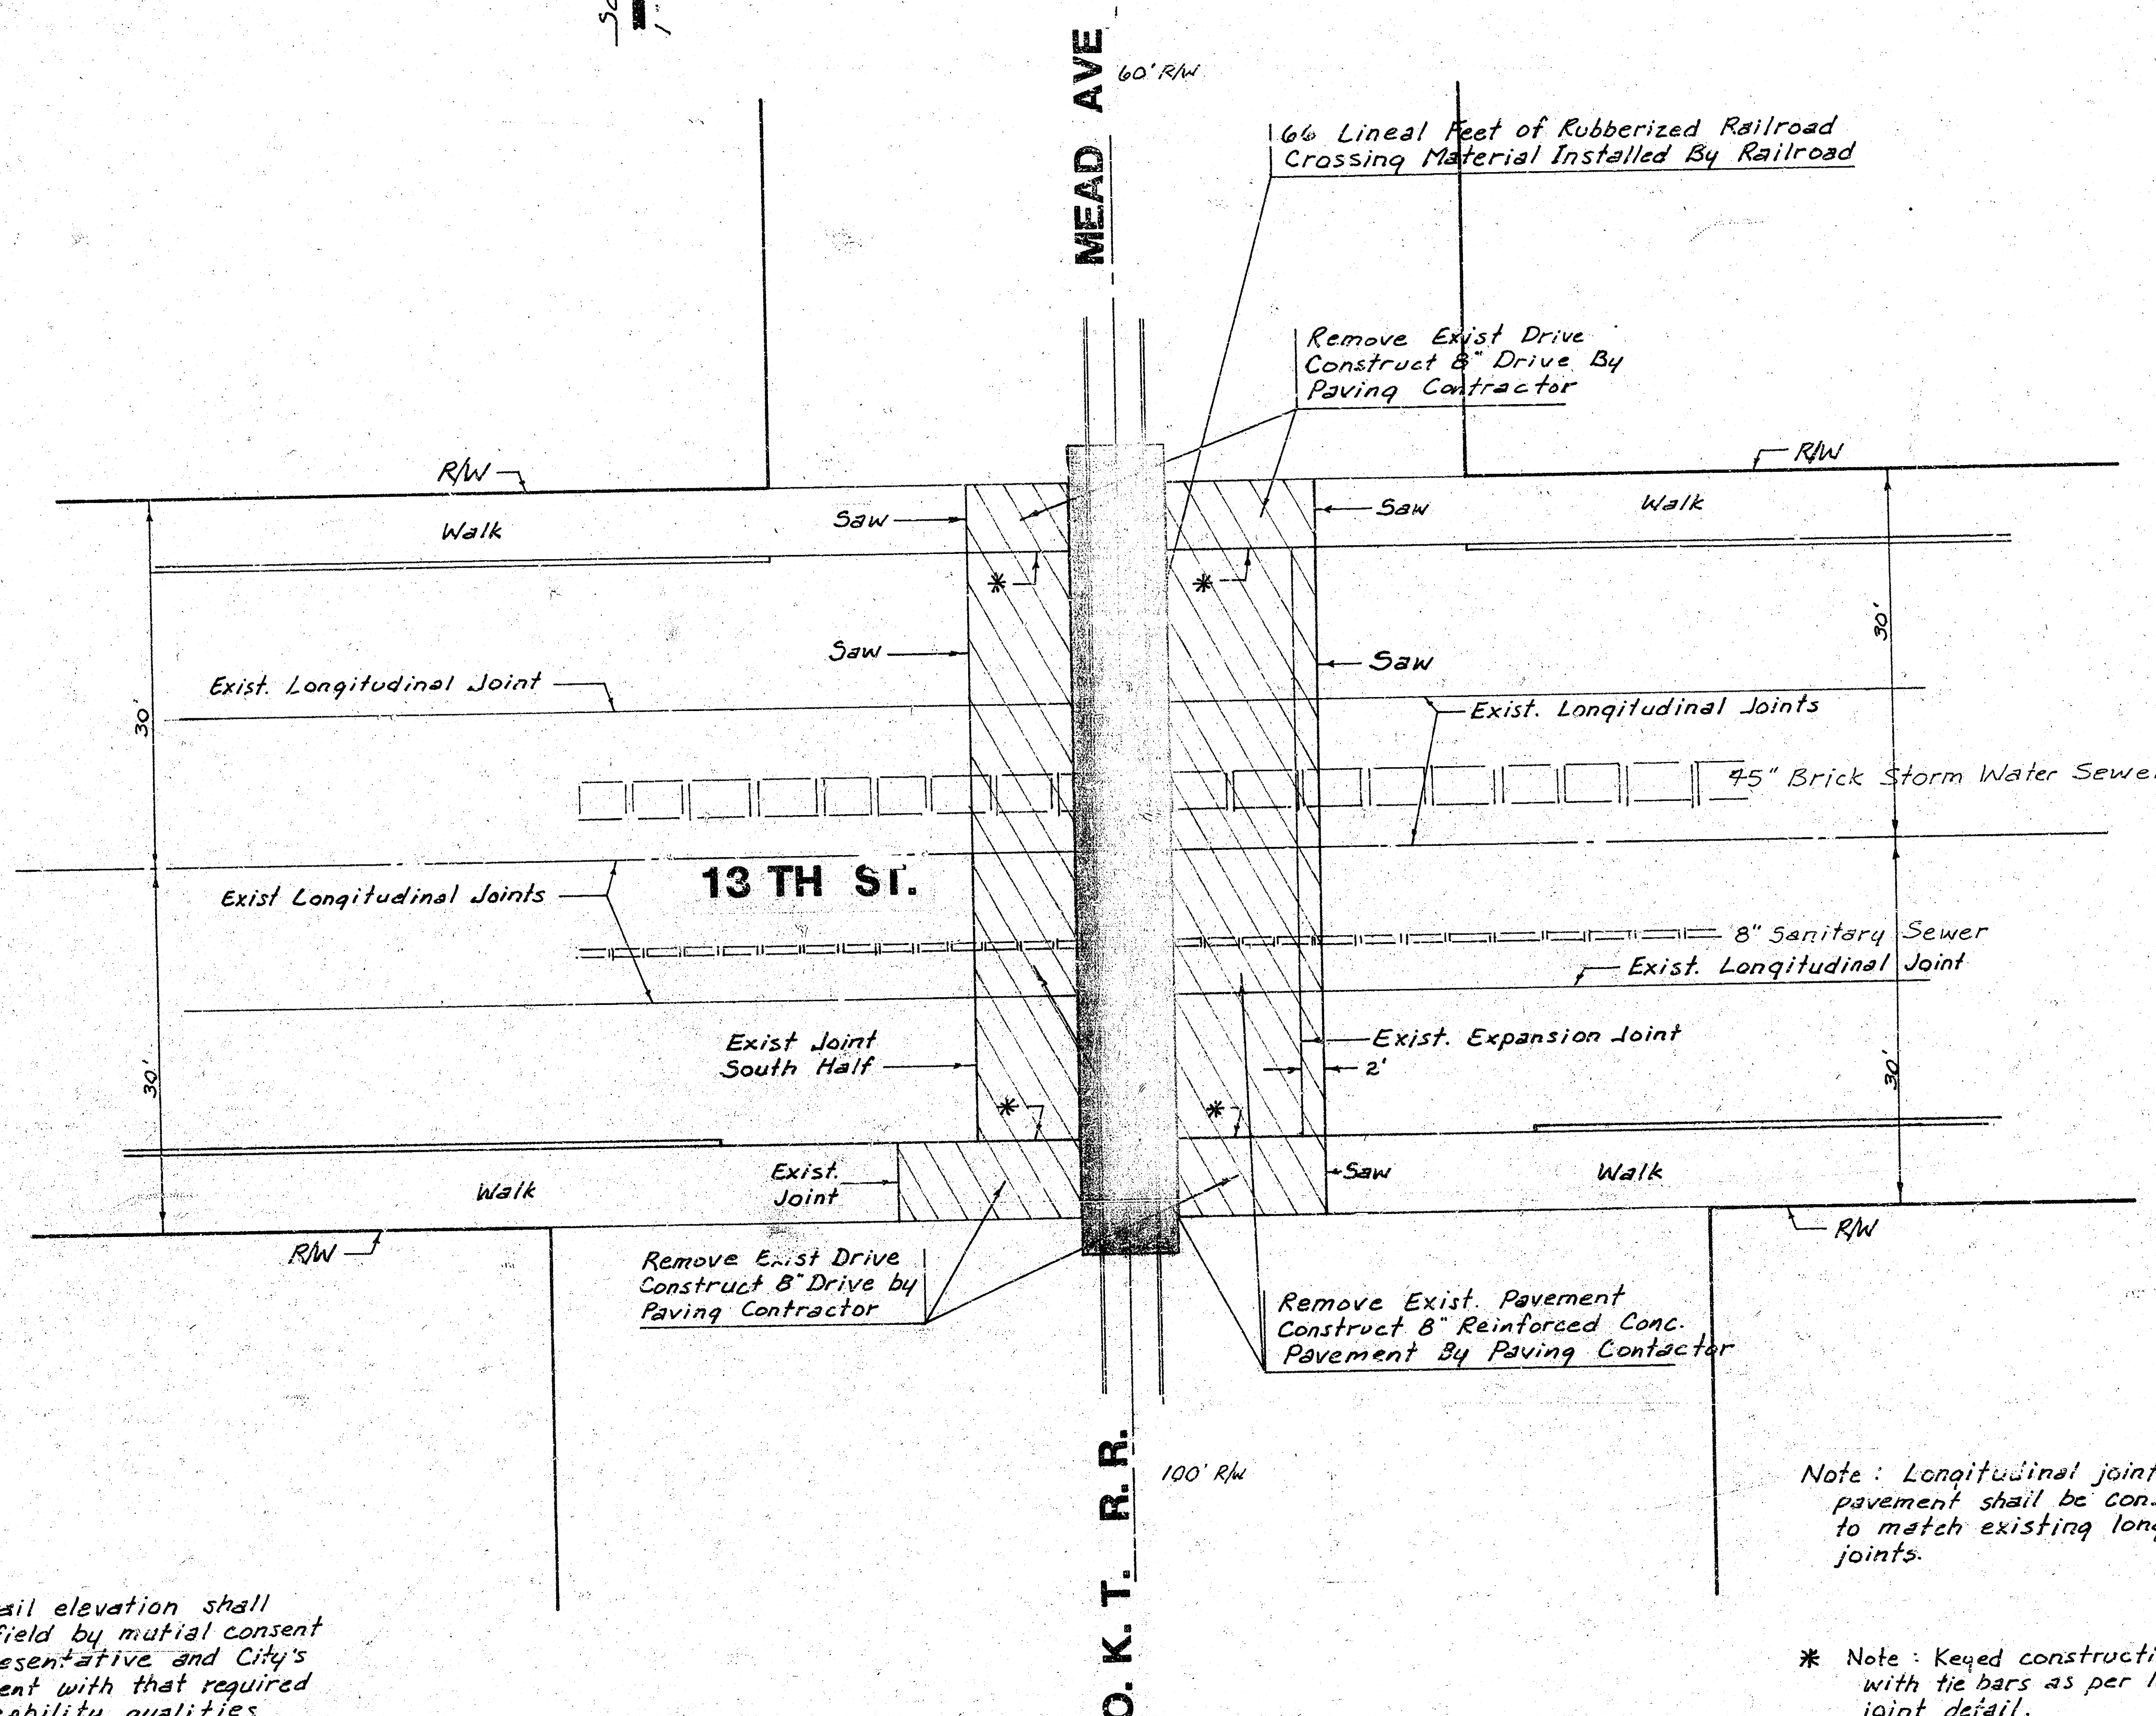


LONGITUDINAL CONSTRUCTION JOINT DETAIL

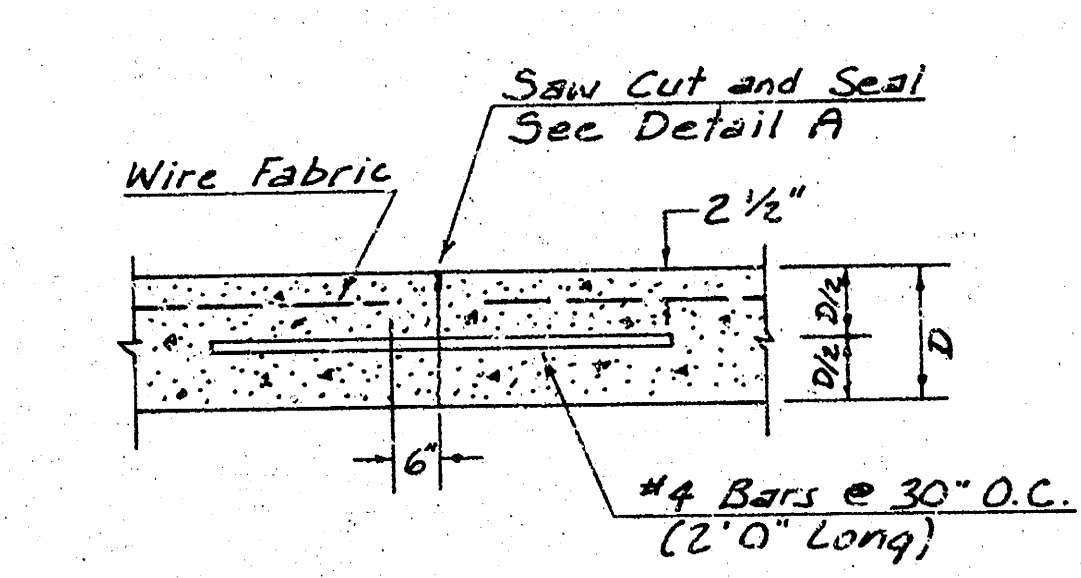

SAWED LONGITUDINAL JOINT DETAIL

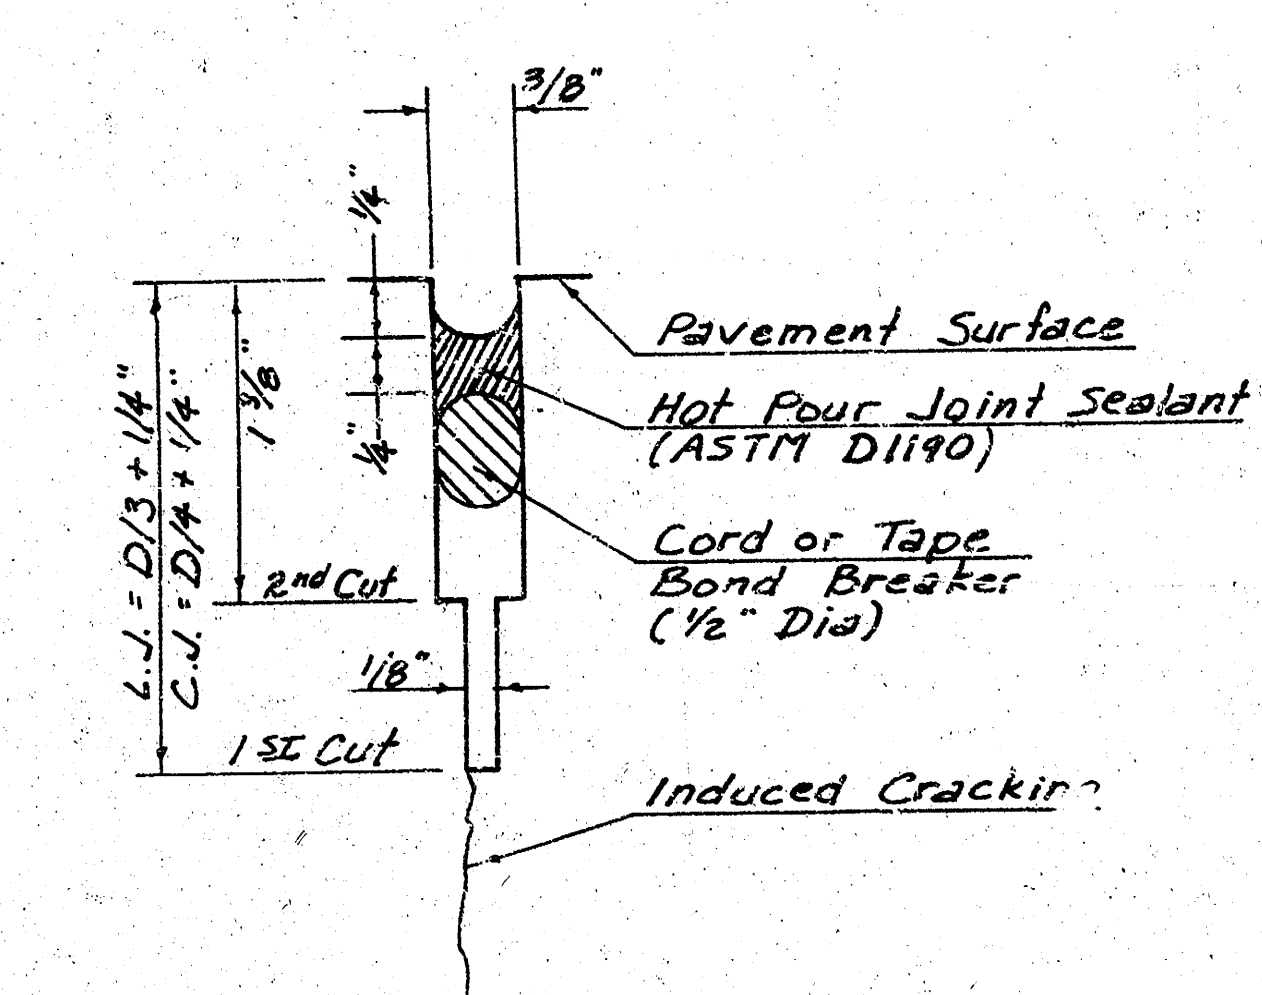

DETAIL A

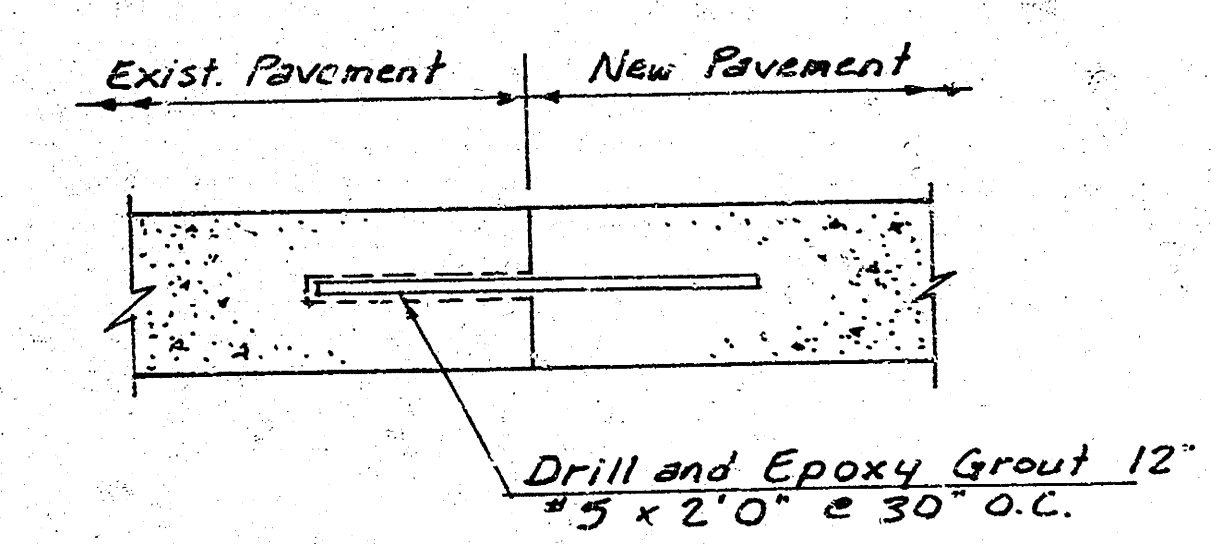

TRANSVERSE CONSTRUCTION JOINT ALONG EXISTING PAVEMENT

Note: Finished top of rail elevation shall be established in the field by mutual consent between railroad representative and City's Field Engineer consistent with that required to provide desired rideability qualities consistent with desired vehicular movement on the street.

PROJECT DESCRIPTION	
RUBBERIZED RAILROAD CROSSING	
13 TH ST. NO. AT MEAD	
PROJECT NUMBER	
828-70-286-50219-430-000-000	