

# LATERAL 54, MAIN 3, SOUTHWEST INTERCEPTOR

PROJ. NO. 468-83060

OCA NO. 743825

CITY OF WICHITA, KANSAS


M. E. LINDEBAK P.E. - CITY ENGINEER

GENERAL NOTES:


1. ALL CONSTRUCTION AND MATERIAL TO COMPLY WITH CITY OF WICHITA SPECIFICATIONS AND STANDARDS.
2. THE CONTRACTOR SHALL NOTIFY THE UTILITY SERVICE COMPANIES TO FLAG THEIR UNDERGROUND LINES AND REQUEST ANY OVERHEAD POLE/LINE ADJUSTMENTS 48 HOURS PRIOR TO CONSTRUCTION.  
KANSAS ONE-CALL 1-800-344-7233
3. THE UNDERGROUND UTILITY SERVICE LINES AND OVERHEAD UTILITY POLE LINES ARE TO BE ADJUSTED AS NECESSARY BY OTHERS PRIOR TO CONSTRUCTION UNLESS THE PLANS SPECIFICALLY CALL FOR THEIR ADJUSTMENT BY THE CONTRACTOR. EXISTING UTILITIES AND THEIR LOCATION, AS SHOWN ON THE PLANS, REPRESENT THE BEST INFORMATION OBTAINABLE FOR DESIGN. LOCATION INFORMATION HAS BEEN OBTAINED FROM THE VARIOUS UTILITY COMPANIES AND IS EITHER FROM COMPANY RECORD DRAWINGS OR COMPANY PROVIDED FIELD LOCATIONS. THE CONTRACTOR WILL BE REQUIRED TO WORK AROUND EXISTING UTILITIES WITHIN THE RIGHT-OF-WAY WHICH DO NOT CONFLICT WITH PROPOSED CONSTRUCTION.
4. THE CONTRACTOR SHALL GIVE ALL PROPERTY OWNERS AND/OR TENANTS DIRECTLY AFFECTED BY THE CONSTRUCTION OF THIS PROJECT A MINIMUM OF FIVE (5) DAYS ADVANCE WRITTEN NOTICE PRIOR TO START OF CONSTRUCTION.
5. ANY TREE OR SHRUB REMOVAL MUST BE APPROVED BY THE FIELD ENGINEER.
6. THE CONTRACTOR SHOULD EXAMINE THE CONSTRUCTION SITE PRIOR TO BIDDING AND BE SATISFIED AS TO THE WORK SHOWN FOR COMPLETION.
7. ANY FENCE REMOVED DURING CONSTRUCTION MUST BE REPLACED AND RESTORED TO ORIGINAL CONDITION.
8. UTILITY EASEMENT AND FENCE RESTORATION SHALL BE SUSPENDED FOR THREE WEEKS FROM THE DATE THE SEWER IS TESTED AND ACCEPTED BY THE ENGINEERING DIVISION, DEPARTMENT OF PUBLIC WORKS, TO ALLOW PROPERTY OWNERS TIME TO INSTALL HOOKUPS TO THE SEWER MAIN. CONTRACTORS SHALL NOTIFY PROPERTY OWNERS, IN WRITING, OF THIS AGREEMENT.

INDEX OF SHEETS

SHEET 1 - TITLE SHEET  
SHEET 2 - PLAN/PROFILE

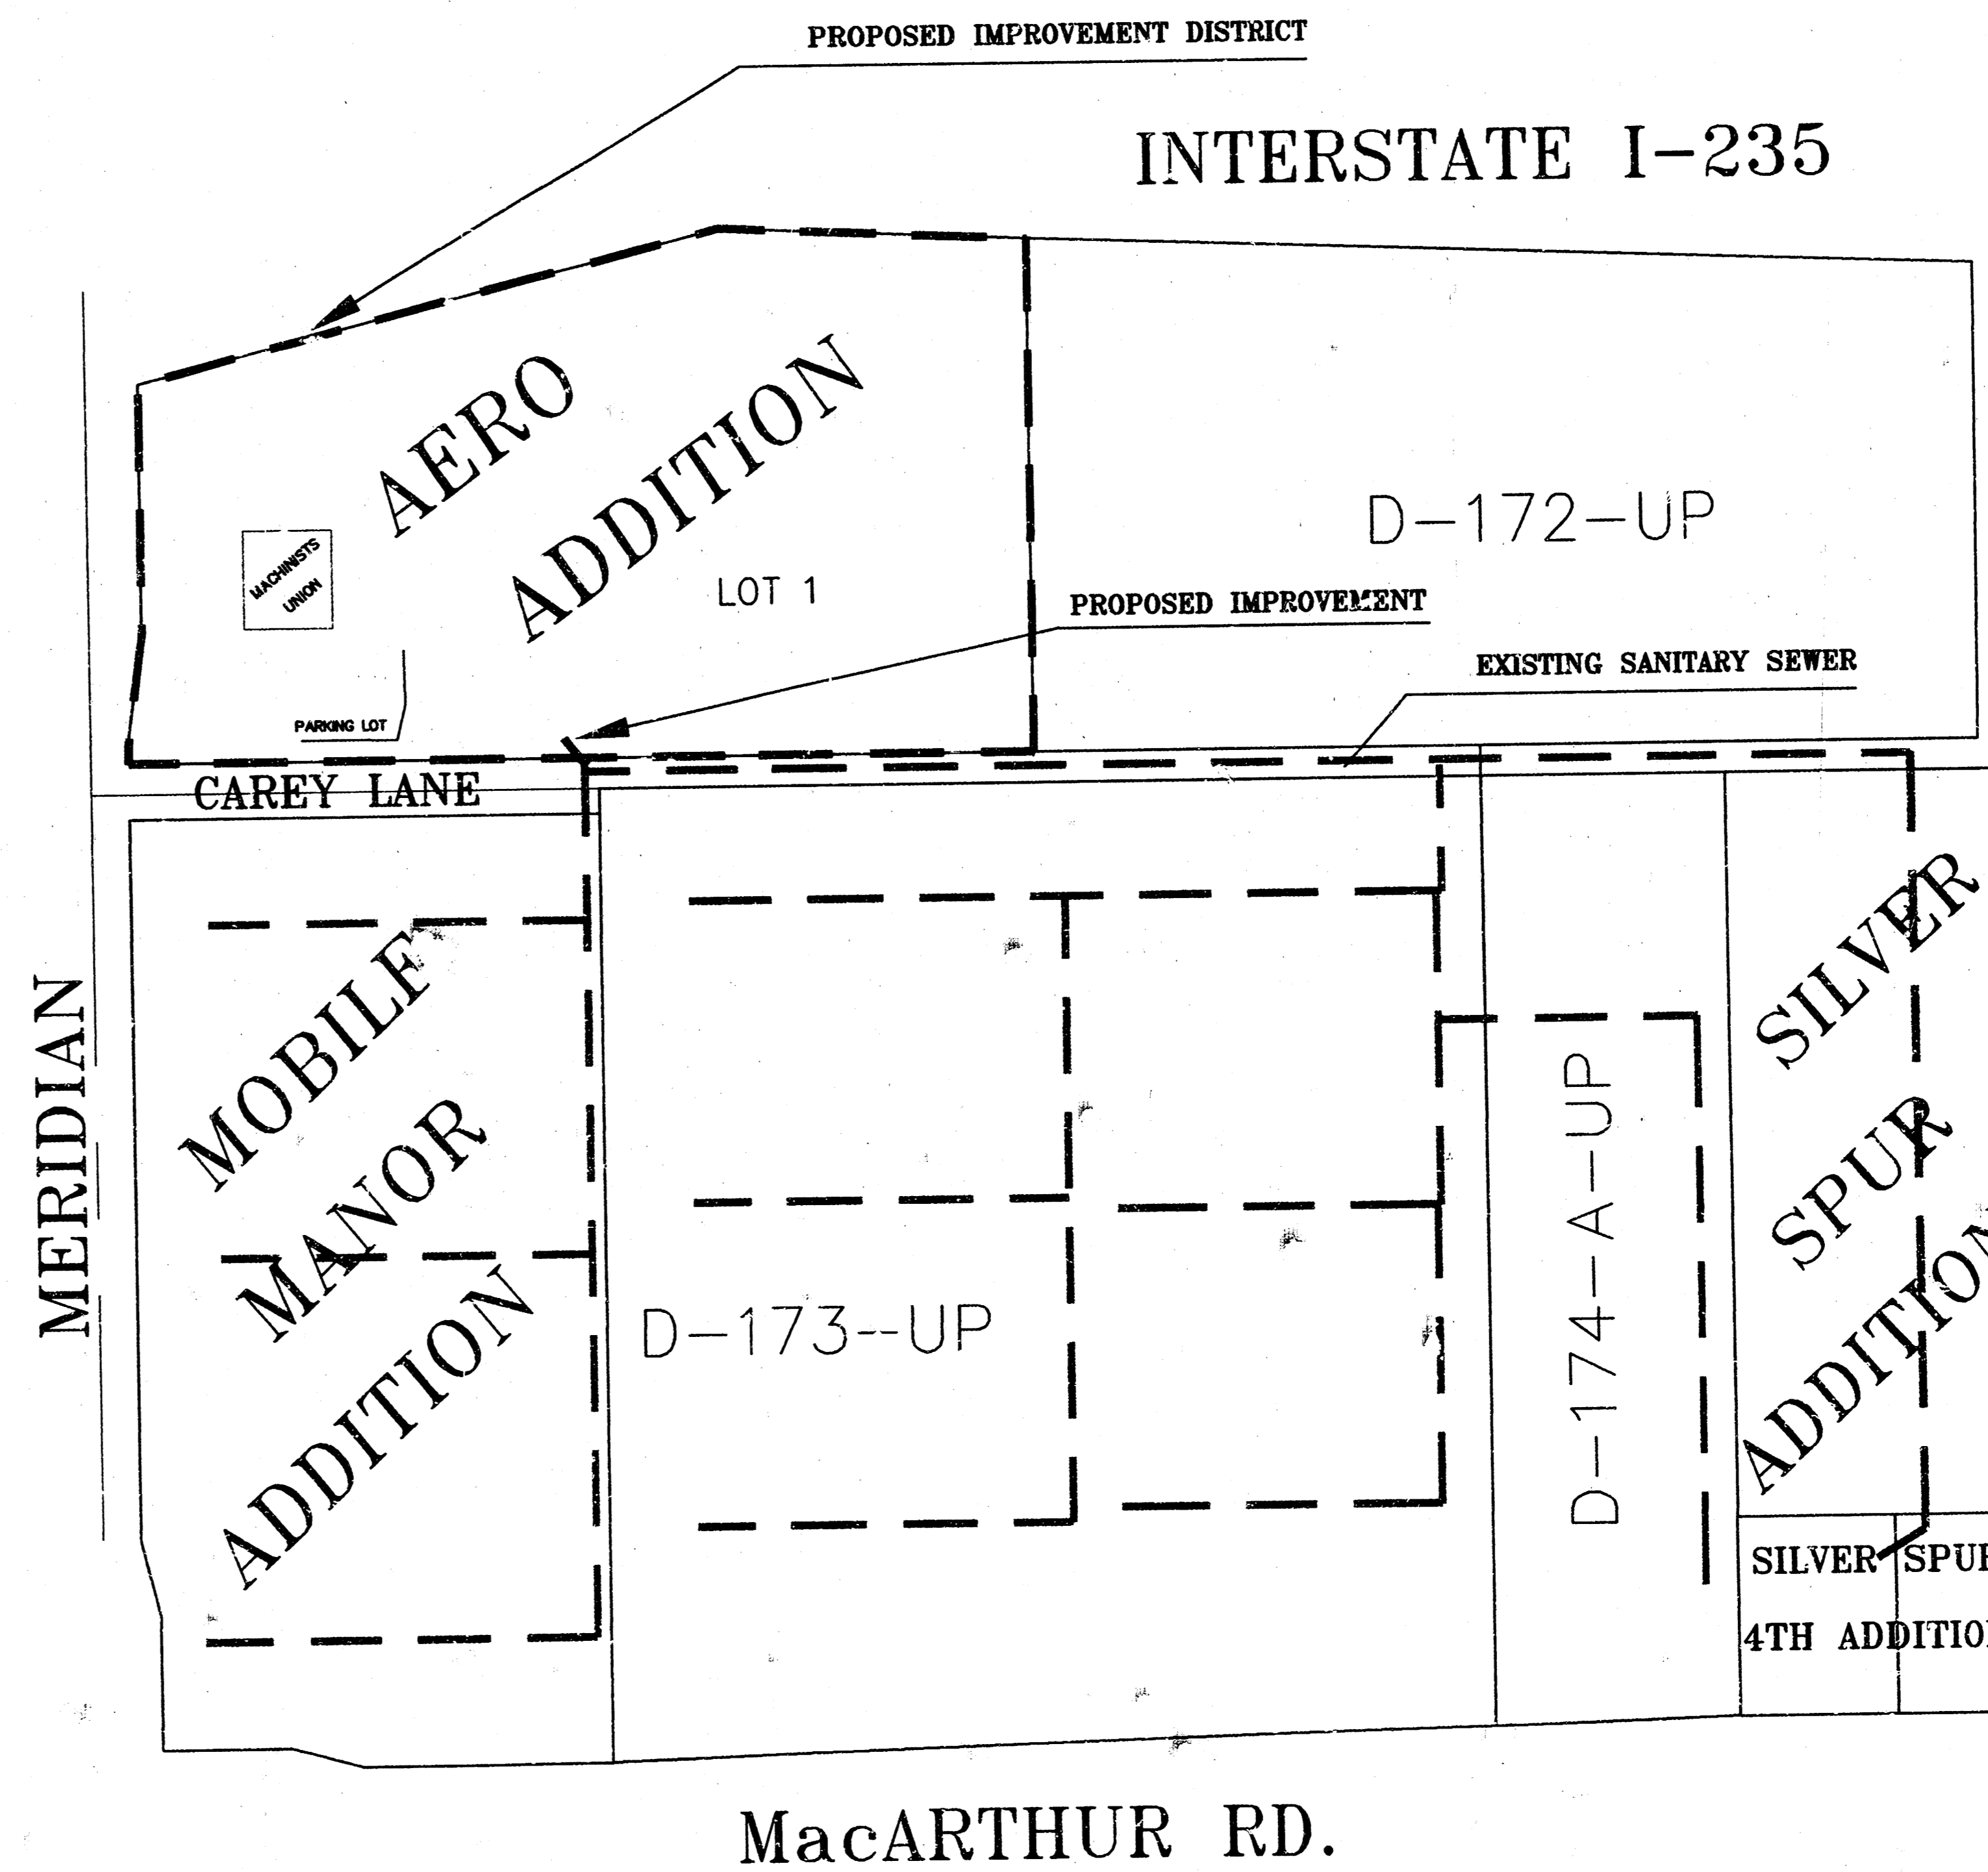

*Booked  
P-150  
10-26-00  
RPL  
Per P/30*

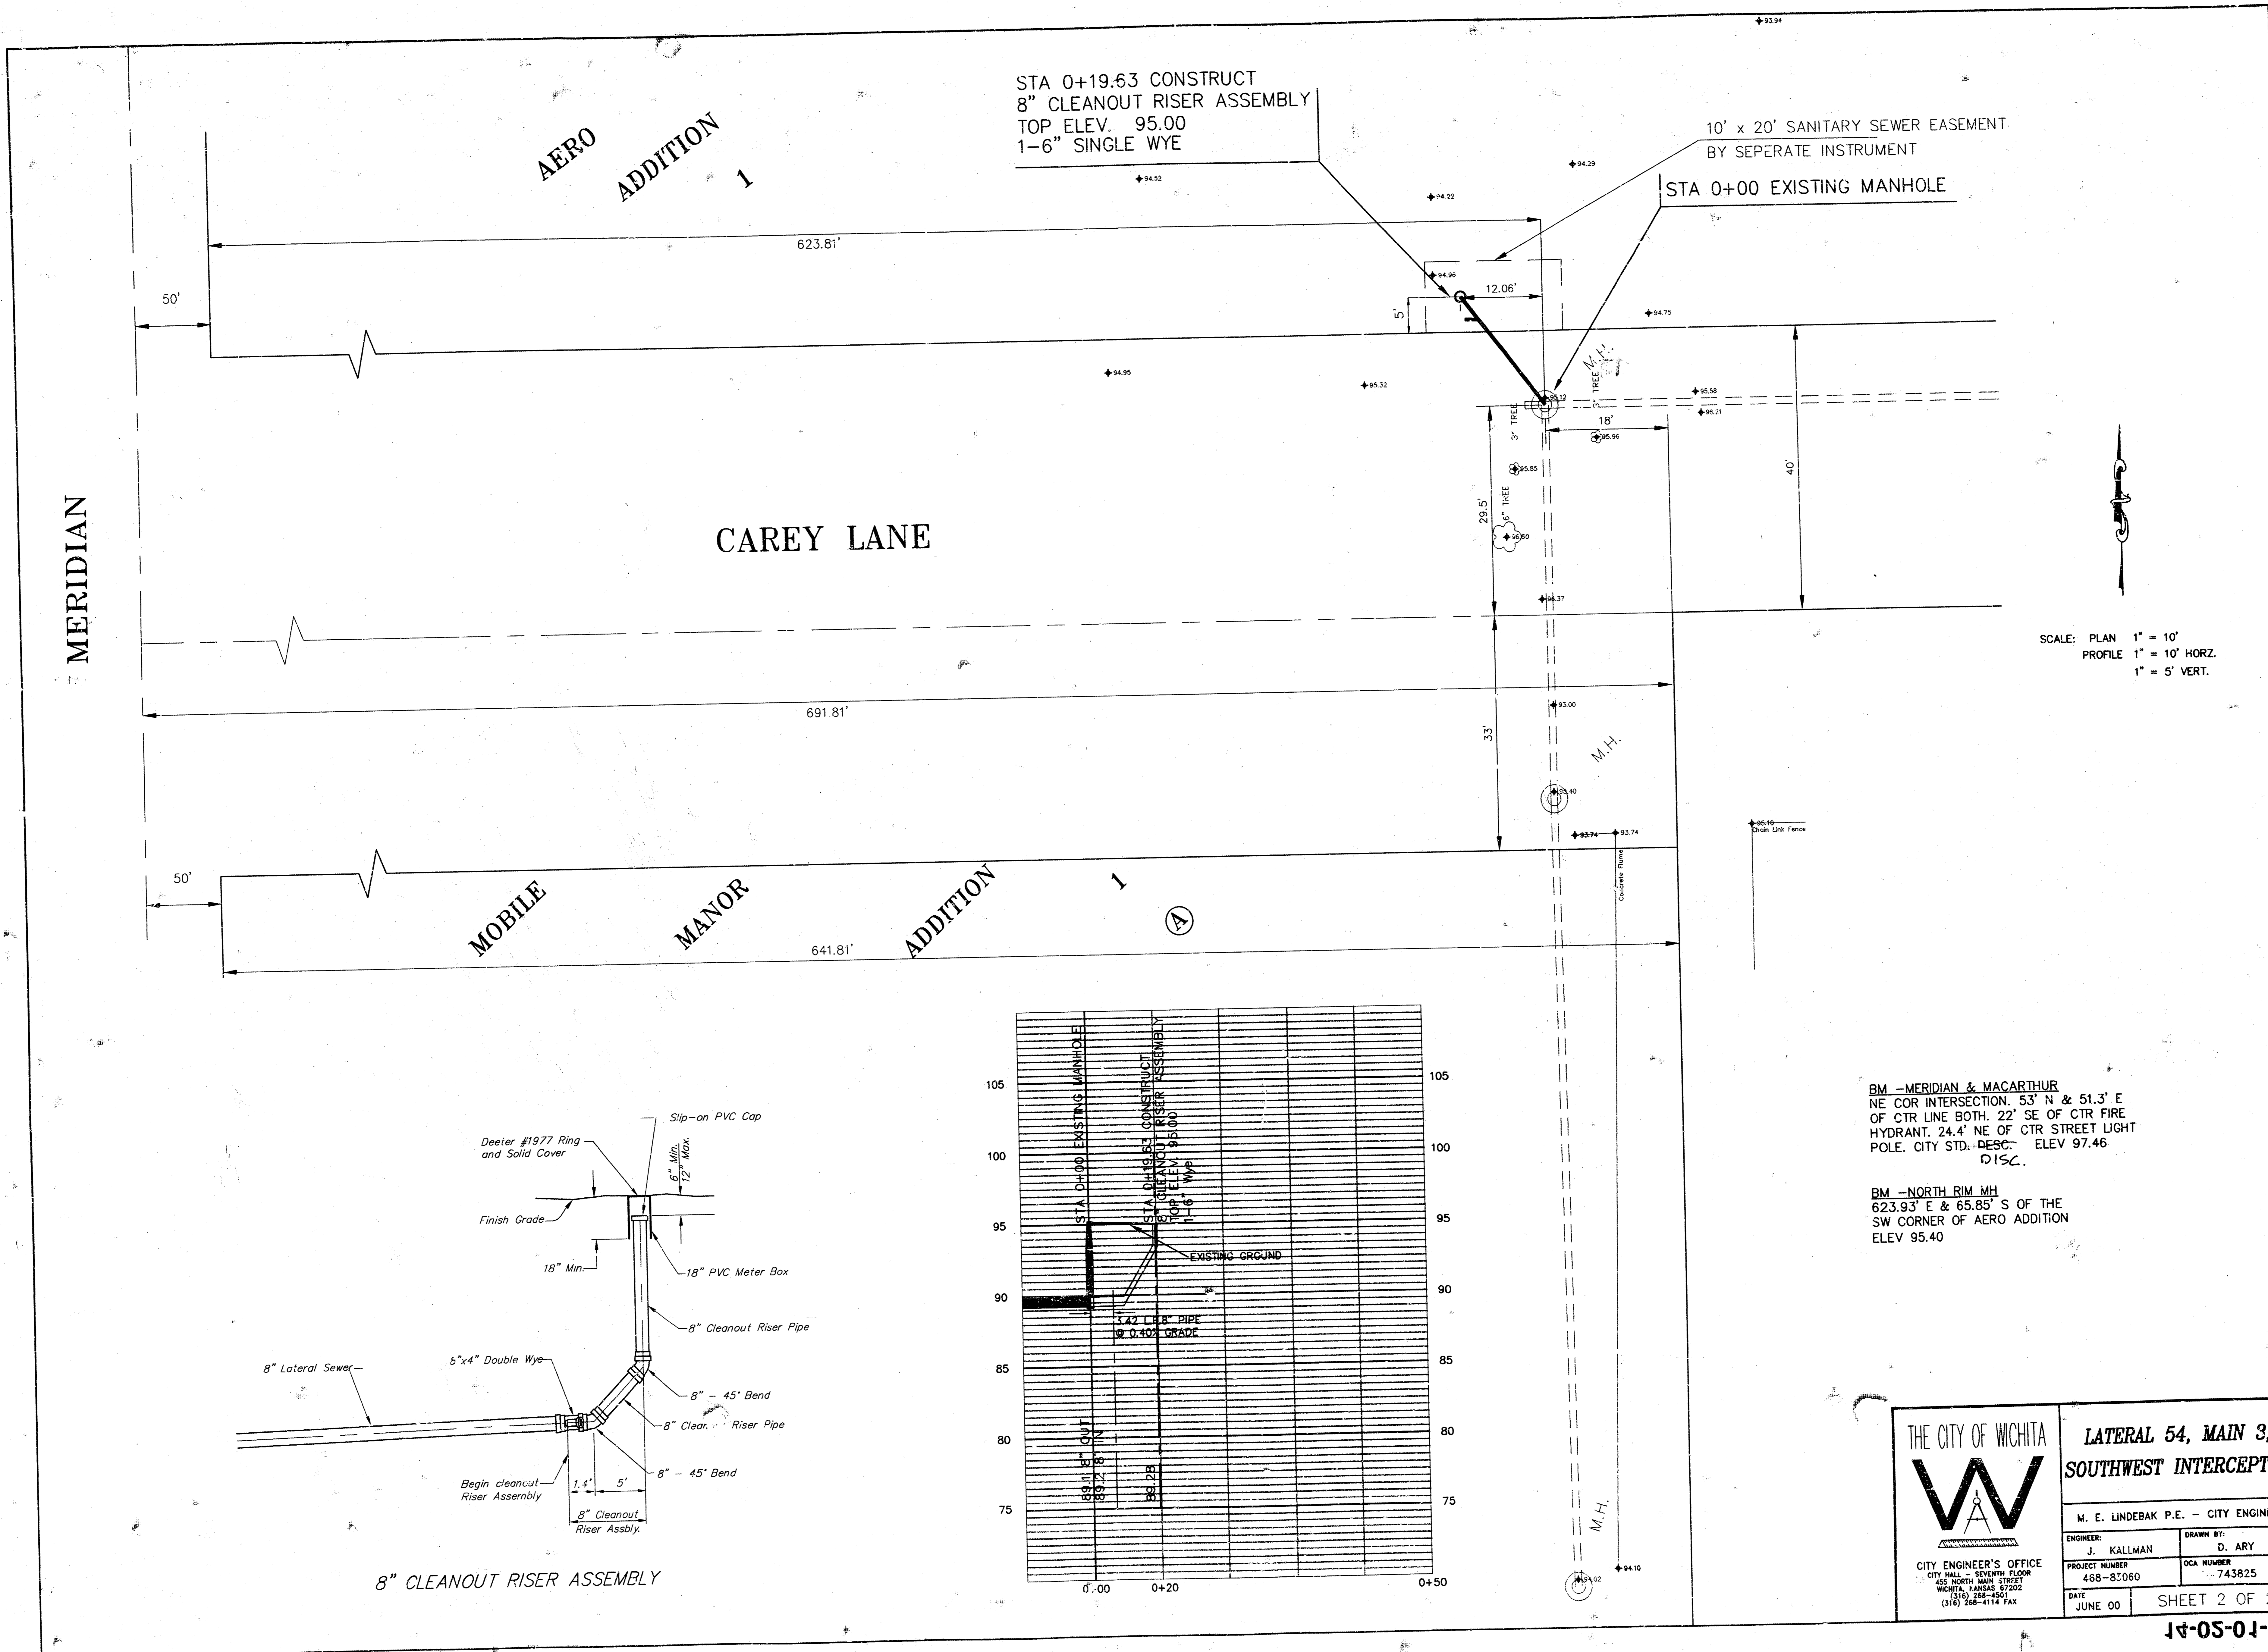

STA 0+19.63 CONSTRUCT  
8" CLEANOUT RISER ASSEMBLY  
TOP ELEV. 95.00  
1-6" SINGLE WYE


10' x 20' SANITARY SEWER EASEMENT  
BY SEPERATE INSTRUMENT  
STA 0+00 EXISTING MANHOLE

MERIDIAN


CAREY LANE

MOBILE MANOR ADDITION 1

SCALE: PLAN 1" = 10'  
PROFILE 1" = 10' HORZ.  
1" = 5' VERT.

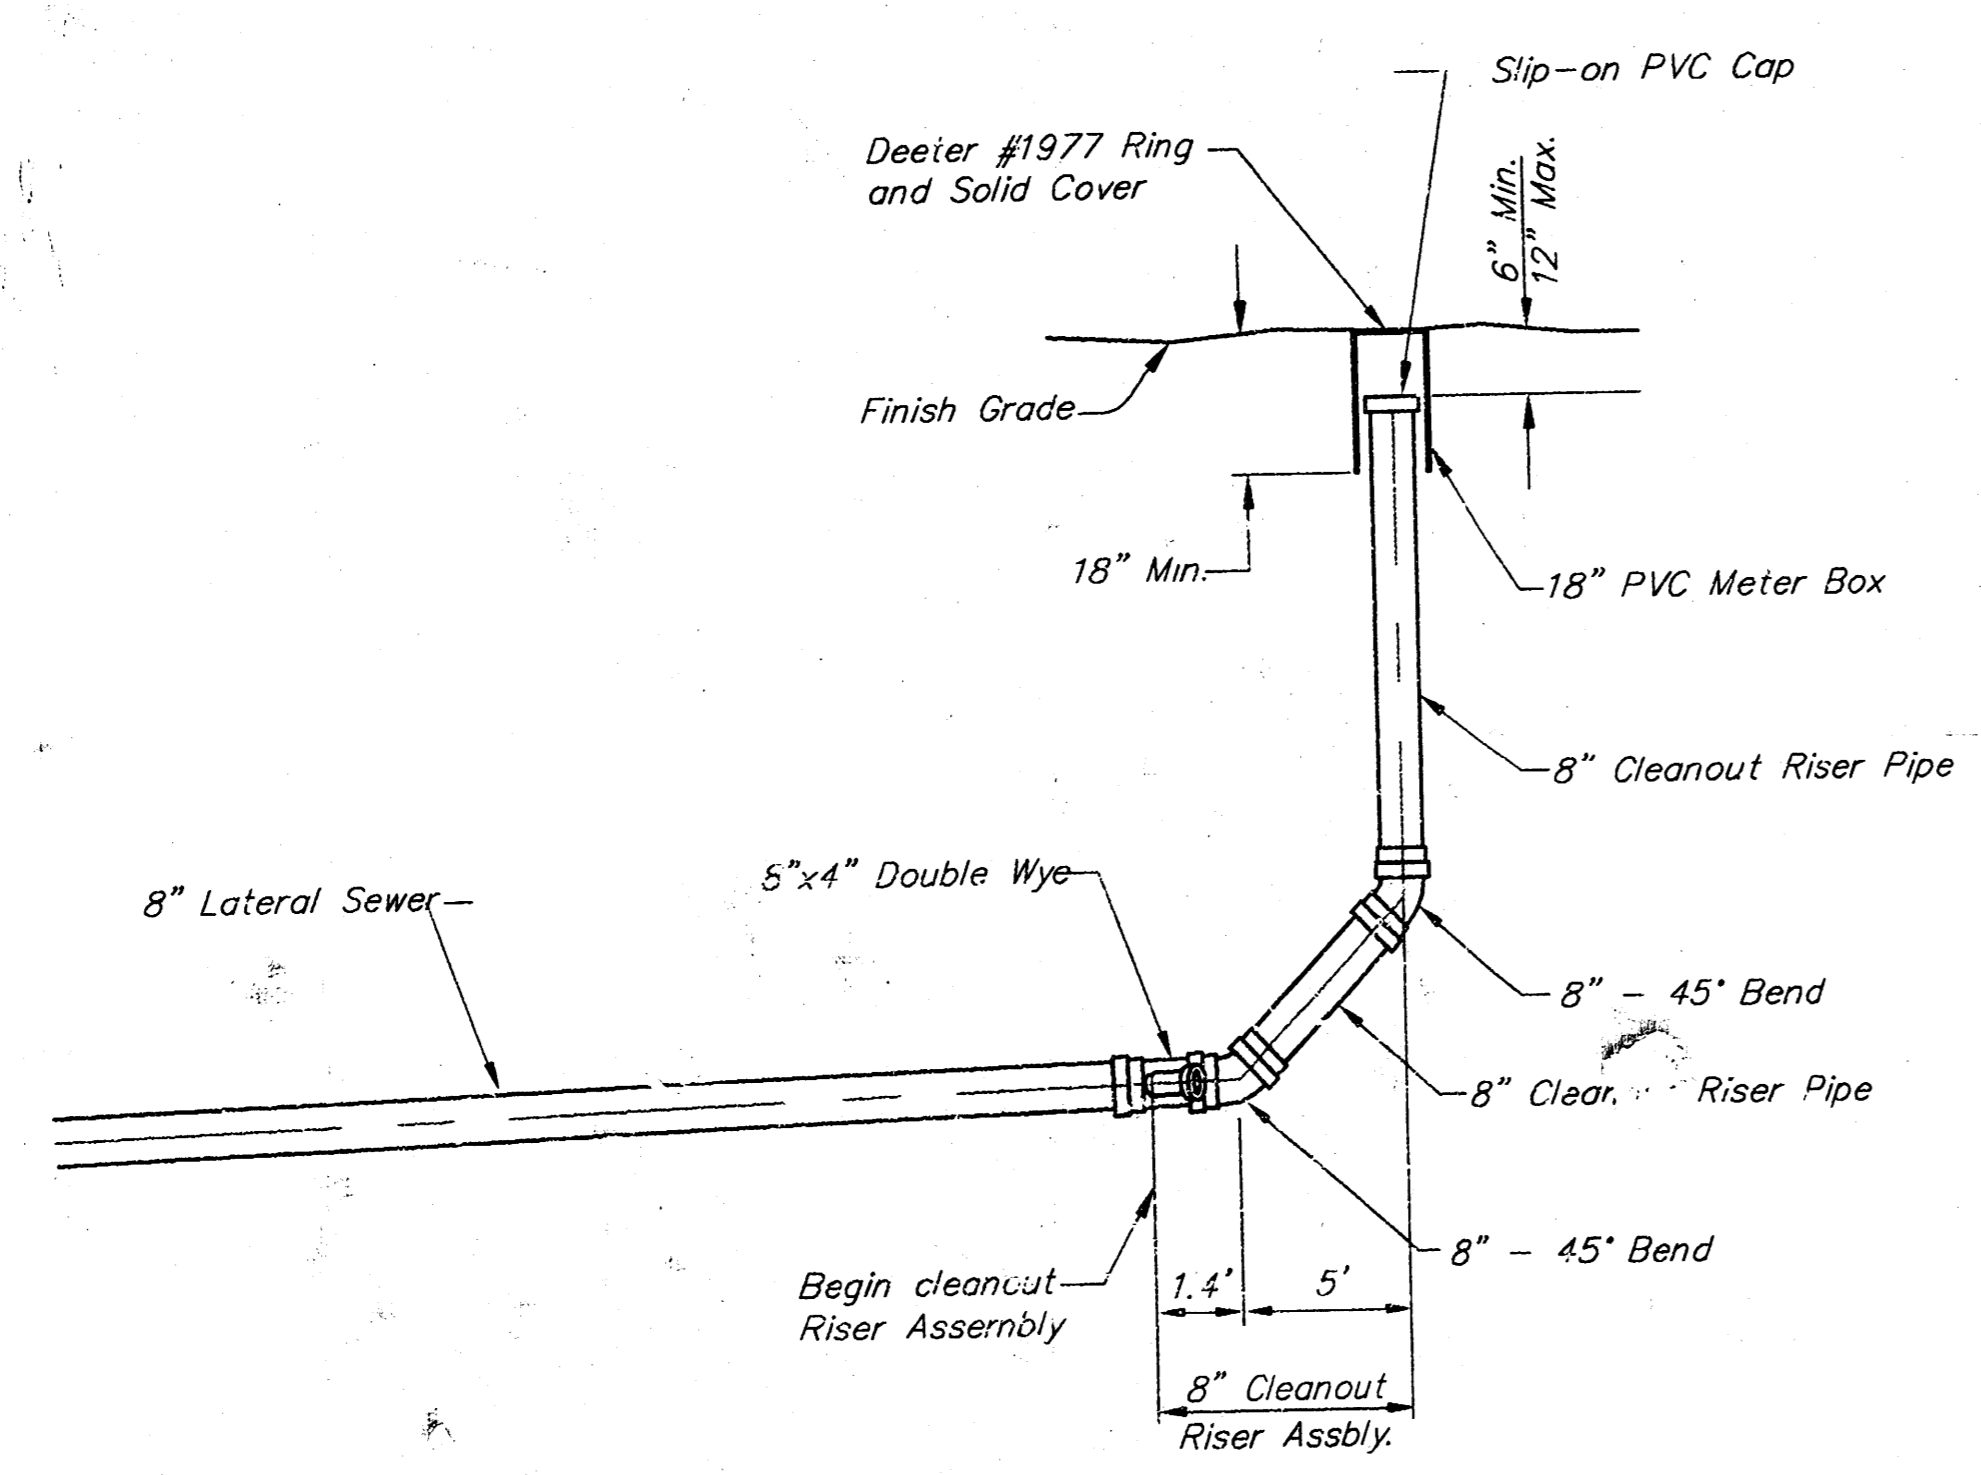

8" CLEANOUT RISER ASSEMBLY

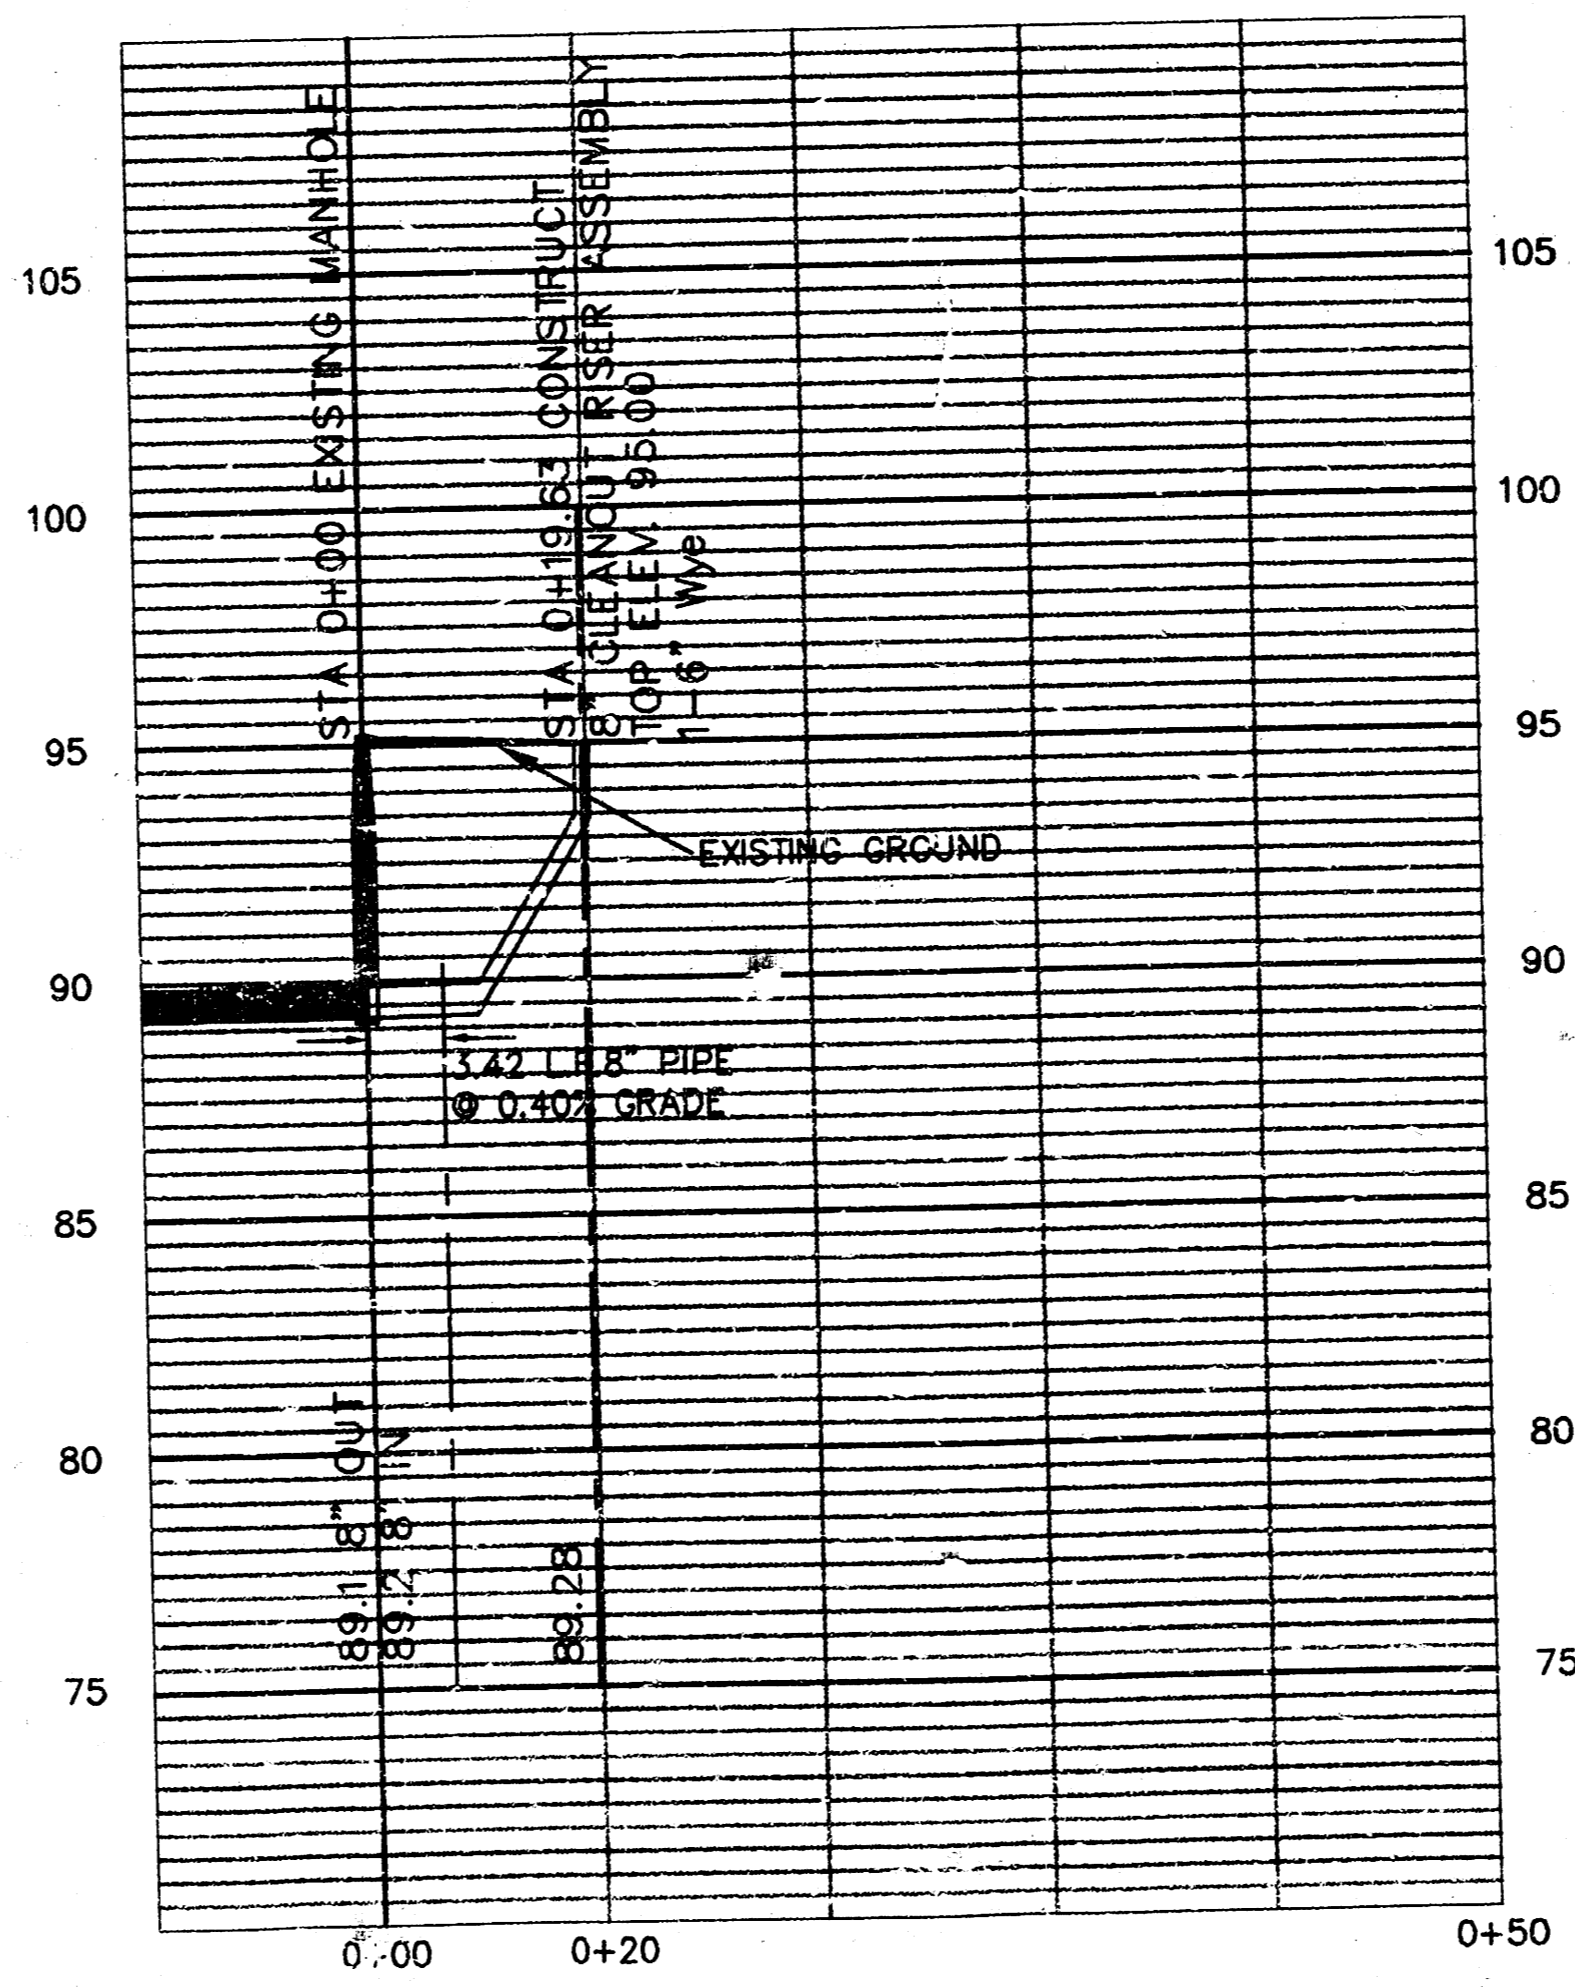

BM -MERIDIAN & MACARTHUR  
NE COR INTERSECTION. 53' N & 51.3' E  
OF CTR LINE BOTH. 22' SE OF CTR FIRE  
HYDRANT. 24.4' NE OF CTR STREET LIGHT  
POLE. CITY STD. DESC. ELEV 97.46  
DISC.

BM -NORTH RIM MH  
623.93' E & 65.85' S OF THE  
SW CORNER OF AERO ADDITION  
ELEV 95.40

<p>THE CITY OF WICHITA</p> <p>CITY ENGINEER'S OFFICE CITY HALL - SEVENTH FLOOR 455 NORTH MAIN STREET WICHITA, KANSAS 67202 (316) 268-4501 (316) 268-4114 FAX</p>	<p><b>LATERAL 54, MAIN 3, SOUTHWEST INTERCEPTOR</b></p>	
	<p>M. E. LINDEBAK P.E. - CITY ENGINEER</p>	
<p>ENGINEER: J. KALLMAN</p>	<p>DRAWN BY: D. ARY</p>	
<p>PROJECT NUMBER: 468-87060</p>	<p>QA NUMBER: 743825</p>	
<p>DATE: JUNE 00</p>	<p>SHEET 2 OF 2</p>	

14-05-01-10