

ALTA

From E·L· Laura to E·L· Block 3, Galyardt's 5th Addn·


Proj·NO· 472-76-245-80666-000-000-001

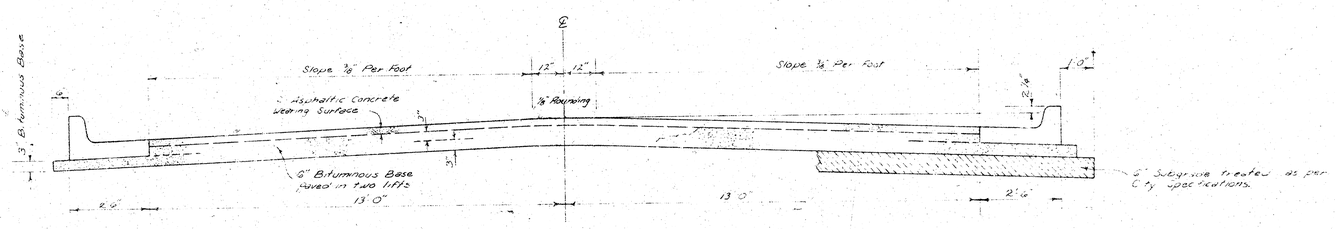

COMBINED CURB & GUTTER



ROLL TYPE CURB & GUTTER



TYPICAL SECTION


31' ASPHALTIC CONCRETE PAVEMENT WITH BITUMINOUS BASE

A TACK COAT OF EMULSIFIED ASPHALT (SS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE OF 0.05 GALLONS PER SQ. YD. BETWEEN LIFTS OF ASPHALTIC MATERIALS WHEN ORDERED BY THE ENGINEER. TACK COAT WILL NOT BE PAID FOR DIRECTLY AND SHALL BE CONSIDERED AS SUBSIDIARY TO PRICE BID FOR ASPHALTIC PAVEMENT.

BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC CONTROLS FOR CROWN AND GRADE. CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF 1' WITH JOINTS IN PRECEDING LIFTS AND SUCH THAT A JOINT WILL BE CONSTRUCTED ON THE PAVEMENT CENTERLINE IN THE TOP LIFT.

The A.C. pavement between the Comb. Curb & Gutter shall be paid as Sq. Yds. 8" A.C. Pavement (6 Bituminous Base). The Bituminous Base under the Comb. Curb & Gutter shall be paid as Sq. Yds. 3" Bituminous Base.

DETAIL OF TRANSVERSE CONSTRUCTION JOINTS



TRANSVERSE CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN FLEXIBLE BASE PAVEMENTS AT LOCATIONS WHERE PAVEMENT TEMPORARILY ENDS TO FACILITATE FUTURE PAVEMENT CONSTRUCTION AS SHOWN BY DETAIL. THE COST OF CONSTRUCTING THE TRANSVERSE CONSTRUCTION JOINTS SHALL NOT BE MEASURED OR PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE BID PRICE FOR SQUARE YARDS OF ASPHALTIC CONCRETE PAVEMENT.

CITY OF WICHITA, KANSAS

DEPARTMENT OF PUBLIC WORKS — ENGINEERING

DEAN SELLERS **ACTING** CITY ENGINEER

DATE _____ PROJ NO **472-76-245-80666-000-000-001**

1/3


FILMED FROM THE BEST

B.M: 85.93 "+" Cut on B.Curb at N.E. Cor. of intersection of Shady Grove & Parklawn, 100' W. of ℄ of Laura.

B.M: 87.68 "+" N.W. Cor. of conc. slab at side door of house at #1402 Alta ≈ 15' E. of E.L. Galyardt's 5th Addition.

℄ is down ℄ of Alta.

No More Than 8 - 18' Driveways, The Equivalent To Be Constructed In This Project.

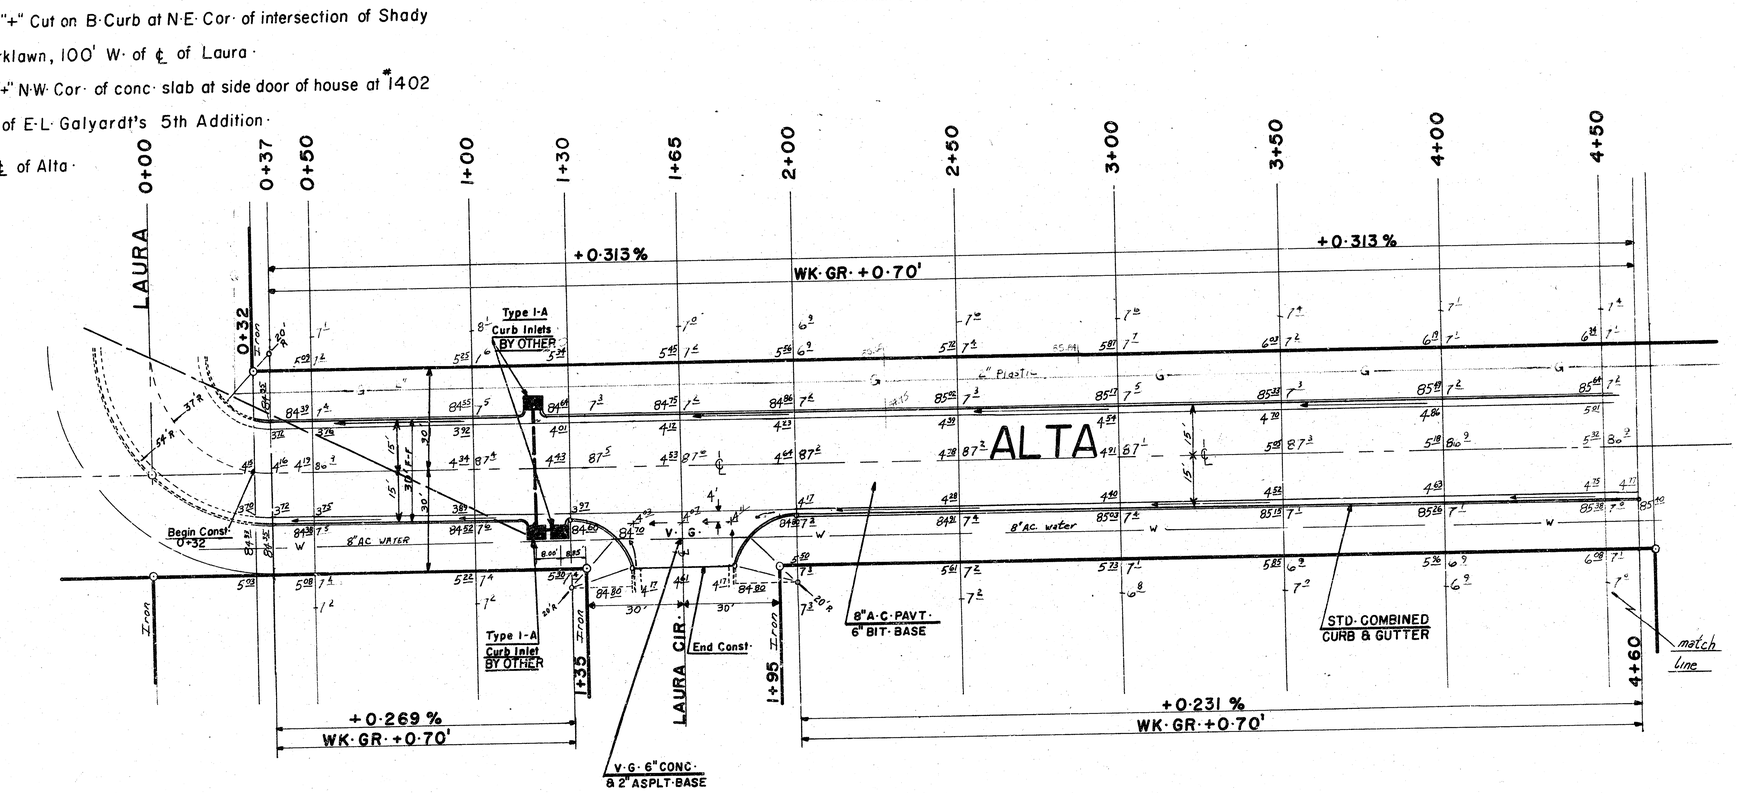

	Prop.	City
Excavation	3242 cy.	422.5cy.
+ 10%	324.2 cy.	42.2 cy.
Total	3566.5cy.	4647cy.
Manipulation	2145.0 sy.	345sy.

SUB-GRADE

TYPE OF SUB-GRADE TREATMENT SHALL BE DETERMINED BY THE [illegible] ENGINEER. SUB-GRADE TREATMENT [illegible] LIME TREATMENT, CEMENT [illegible] SUB-GRADE MODIFICATION, OR ANY COMBINATION OF THESE.

Note: Ties to be taken ℄ any irons moved or destroyed during construction shall be replaced.

Surveyed & Compiled by C.H.L. Jr. Engineering Co. K.L. Jr. Lindley Checked

ALTA


2/4

From E.L. of Laura to E.L. of Block 3, Galyardt's 5th Addition

31'B-B A.C. PAVT. / Comb. Curb & Gutter

3/3

Proj. NO. 472-76-245-80666-000-000-001

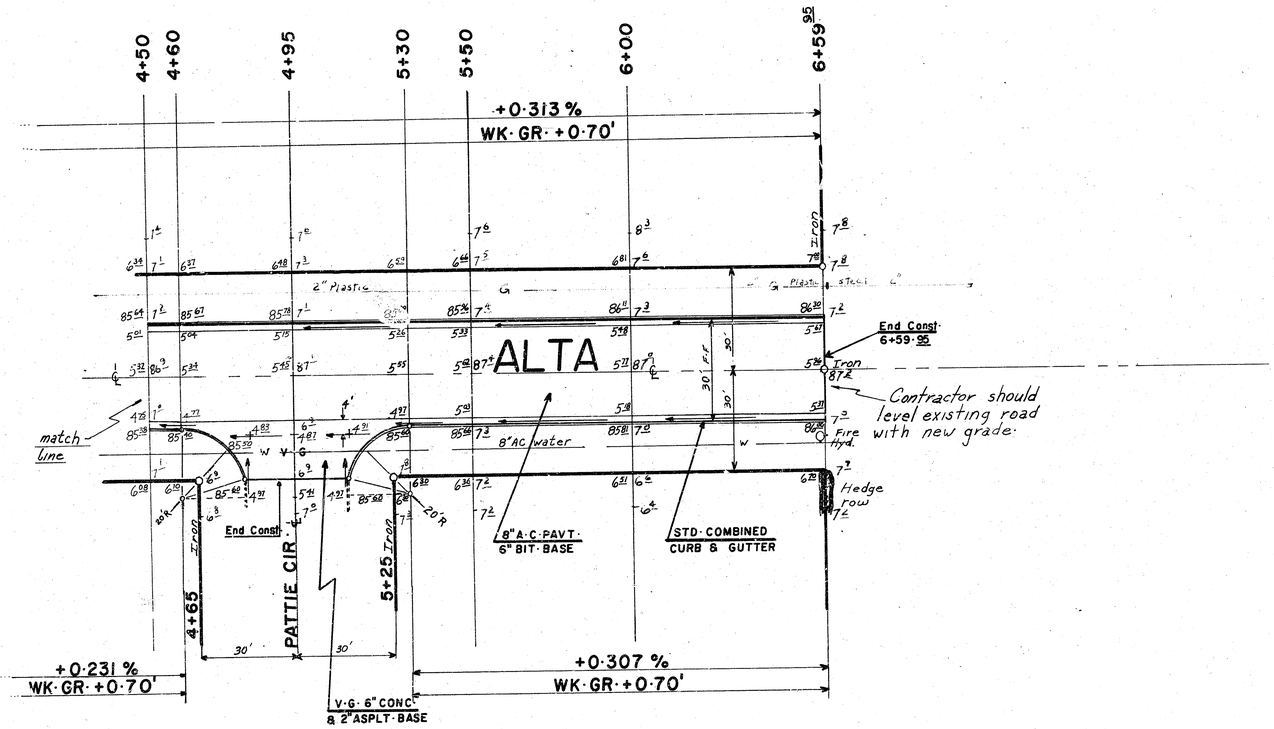

N

SCALE 1"= 20'

ALTA

From E·L· of Laura to E·L· of Block 3, Galyardt's 5th Addition

(31' B-B A·C·PAVT·/ Comb· Curb & Gutter)

Proj·NO· 472-76-245-80€66-000-000-001 3/3