
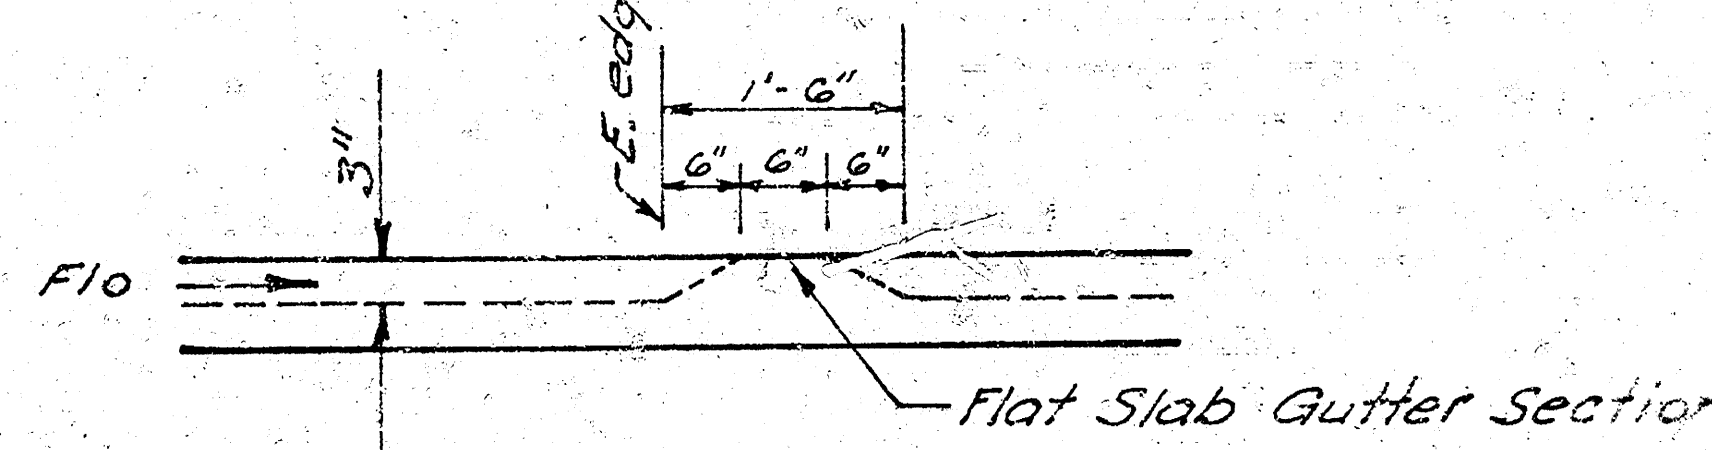
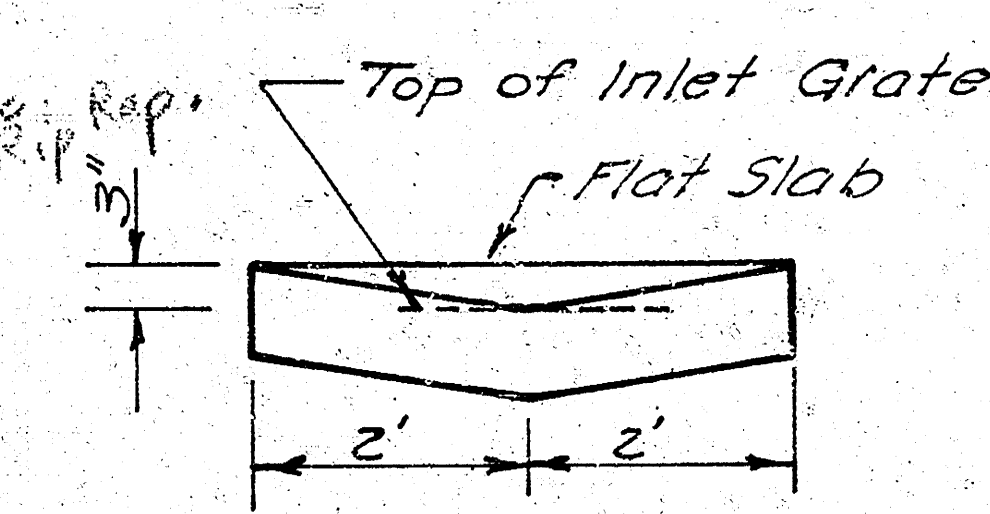
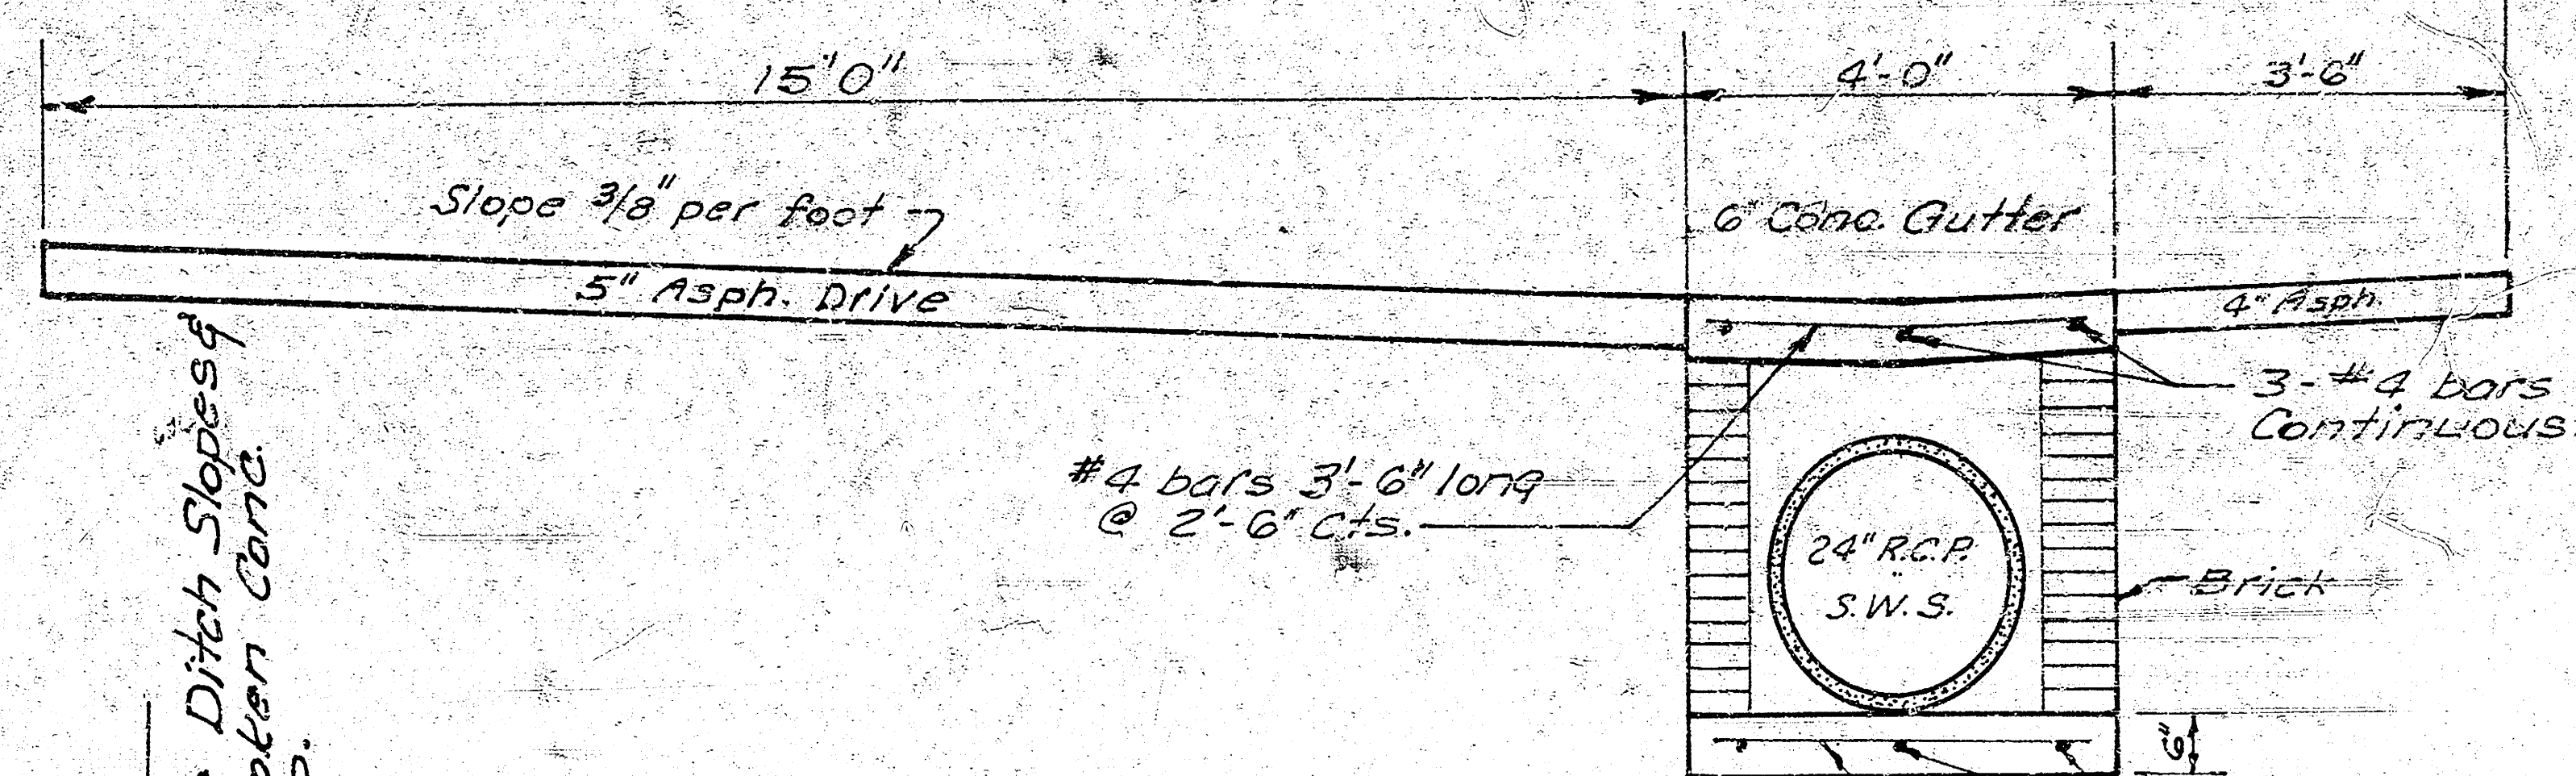


B.M. 218.26 "X" cut in N.W. corner of concrete manhole
73' S. of Rockhill Lane E. & 36.5' E. of E Woodlawn.

B.M. 221.43 S.E. corner conc. base for light
tower at center of Girl Scout parking lot.


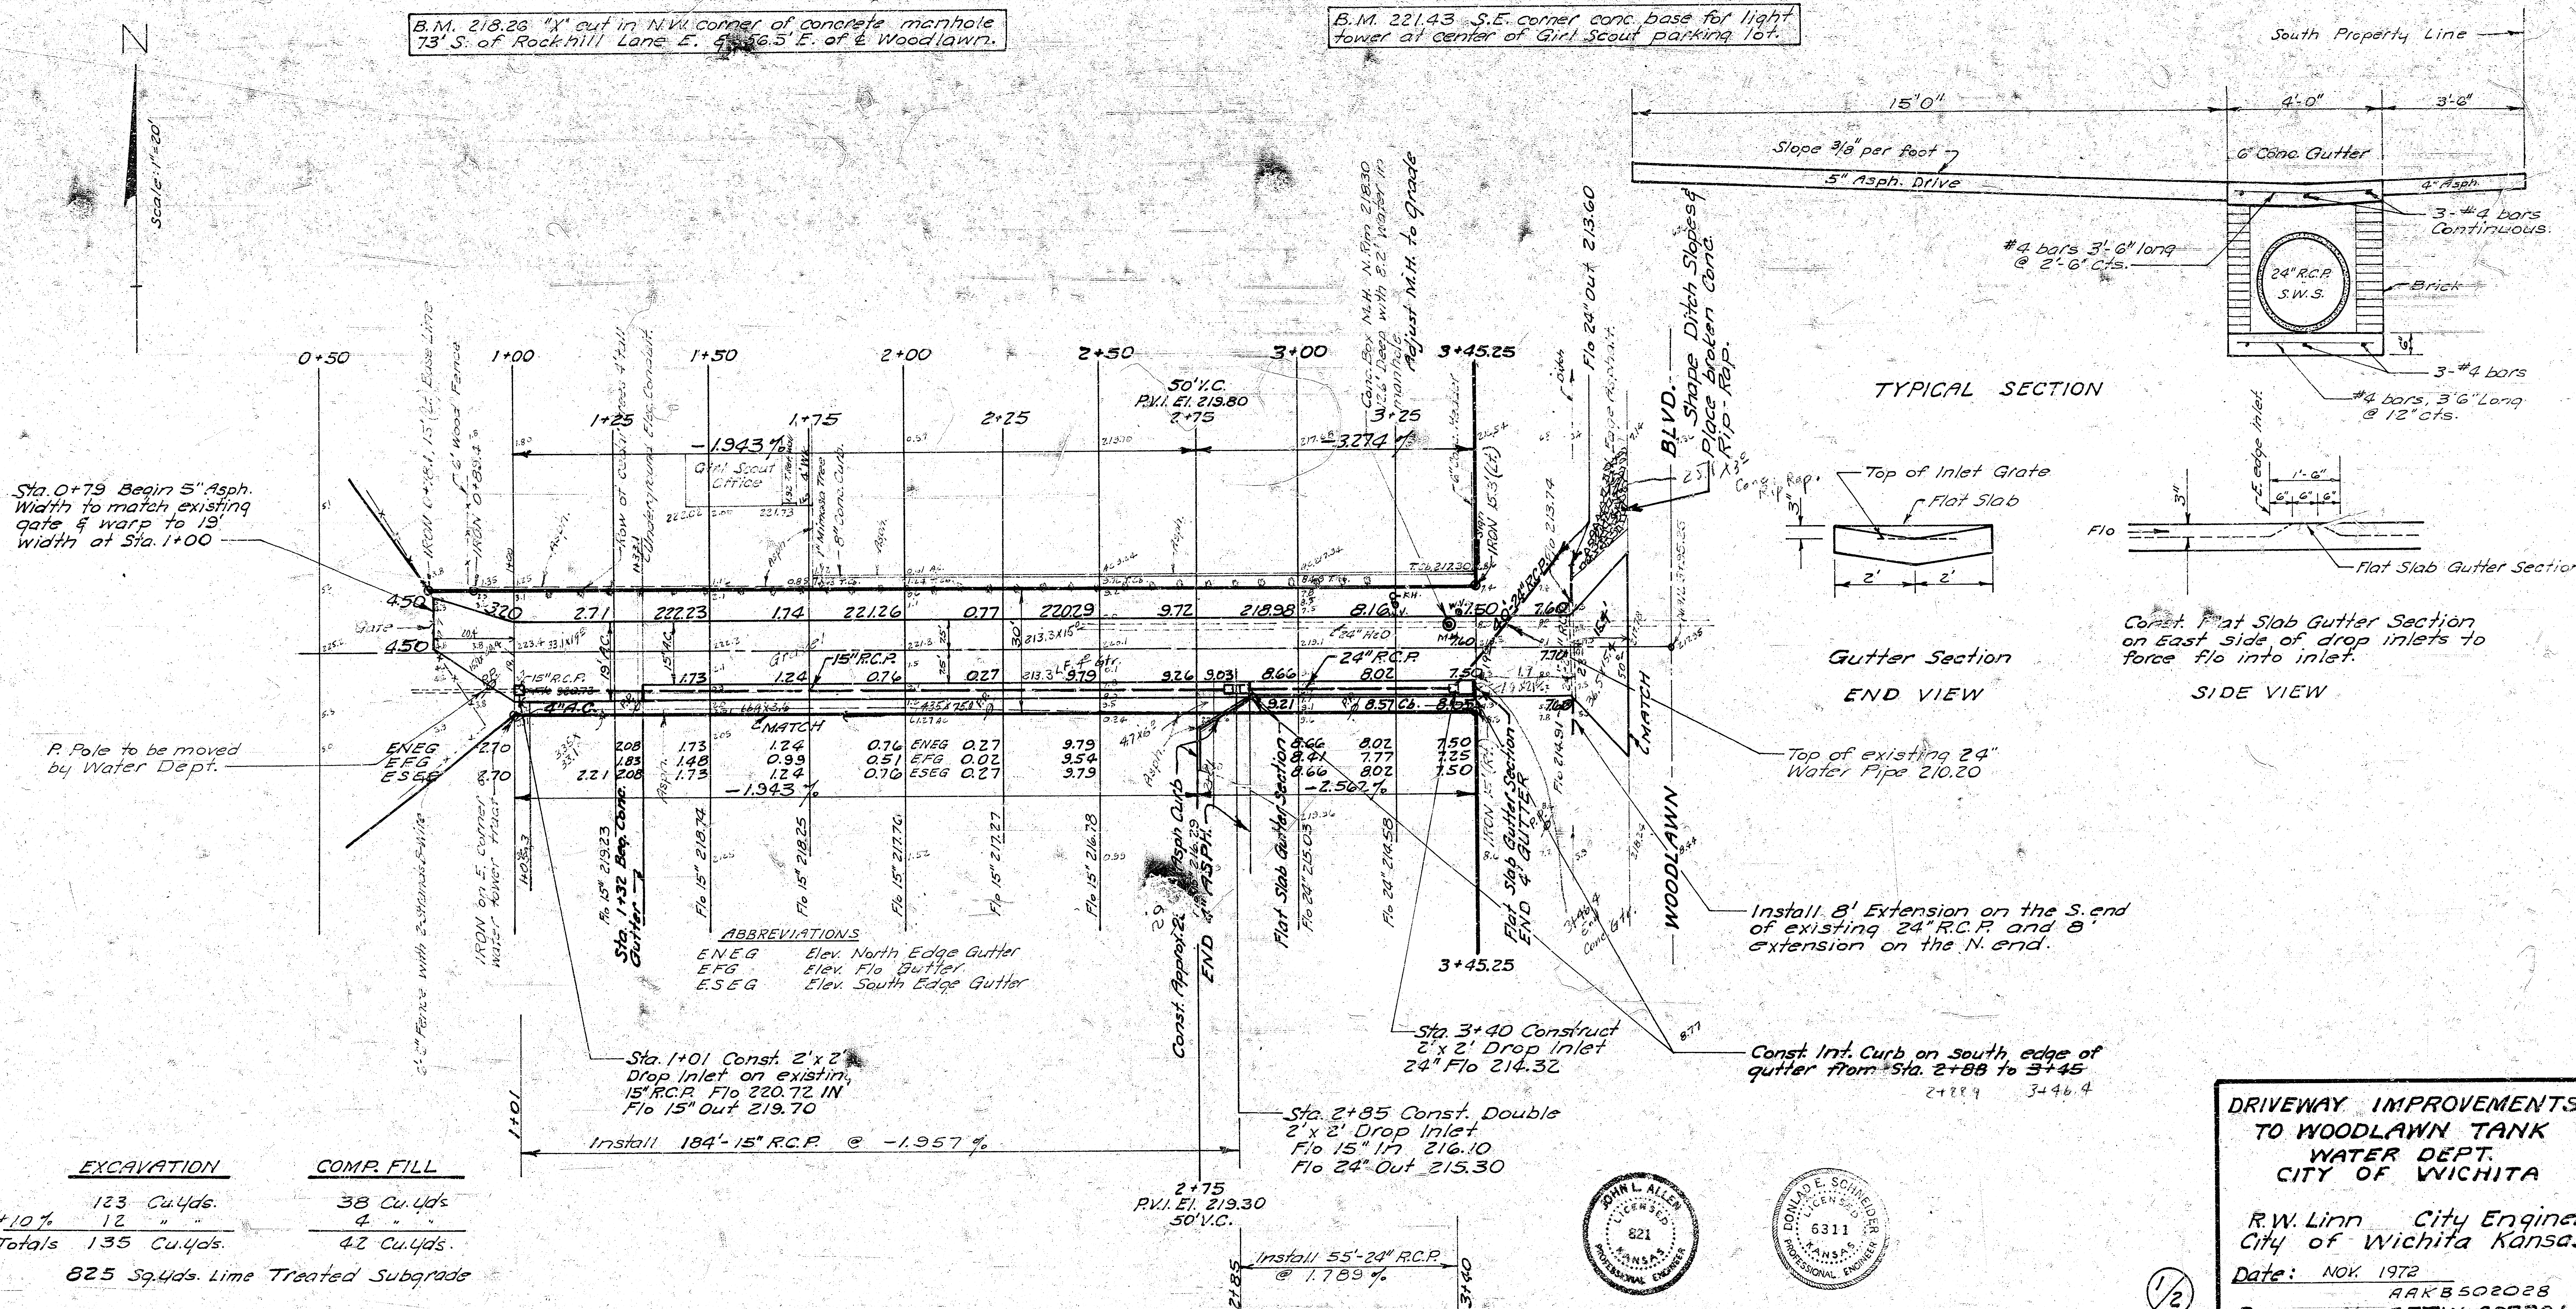


Const. Flat Slab Gutter Section on East side of drop inlets to force flo into inlet.

SIDE VIEW

Top of existing 24" Water Pipe 210.20
 Install 8' Extension on the S. end of existing 24" R.C.P. and 8' extension on the N. end.

EXCAVATION	COMP. FILL
123 Cu.Yds.	38 Cu.Yds.
+10% 12 " "	4 " "
Totals 135 Cu.Yds.	42 Cu.Yds.
825 Sq.Yds. Lime Treated Subgrade	

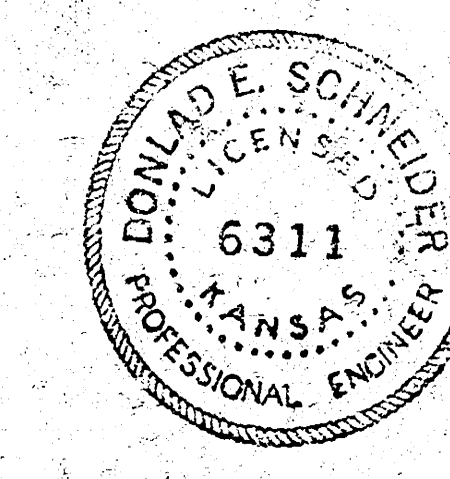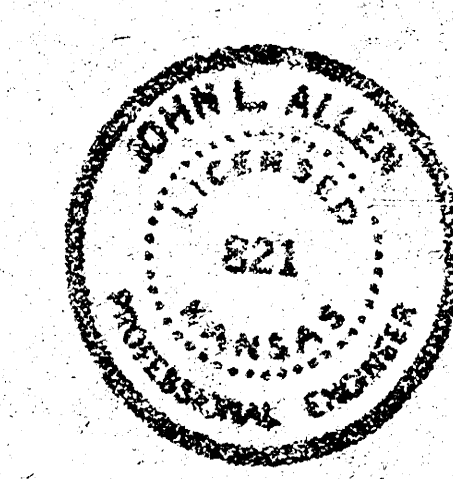

DRIVEWAY IMPROVEMENTS TO WOODLAWN TANK WATER DEPT. CITY OF WICHITA
 R.W. Linn City Engineer
 City of Wichita Kansas
 Date: NOV. 1972
 AAKB502028
 PROJECT No. GETW 607701

1/2