



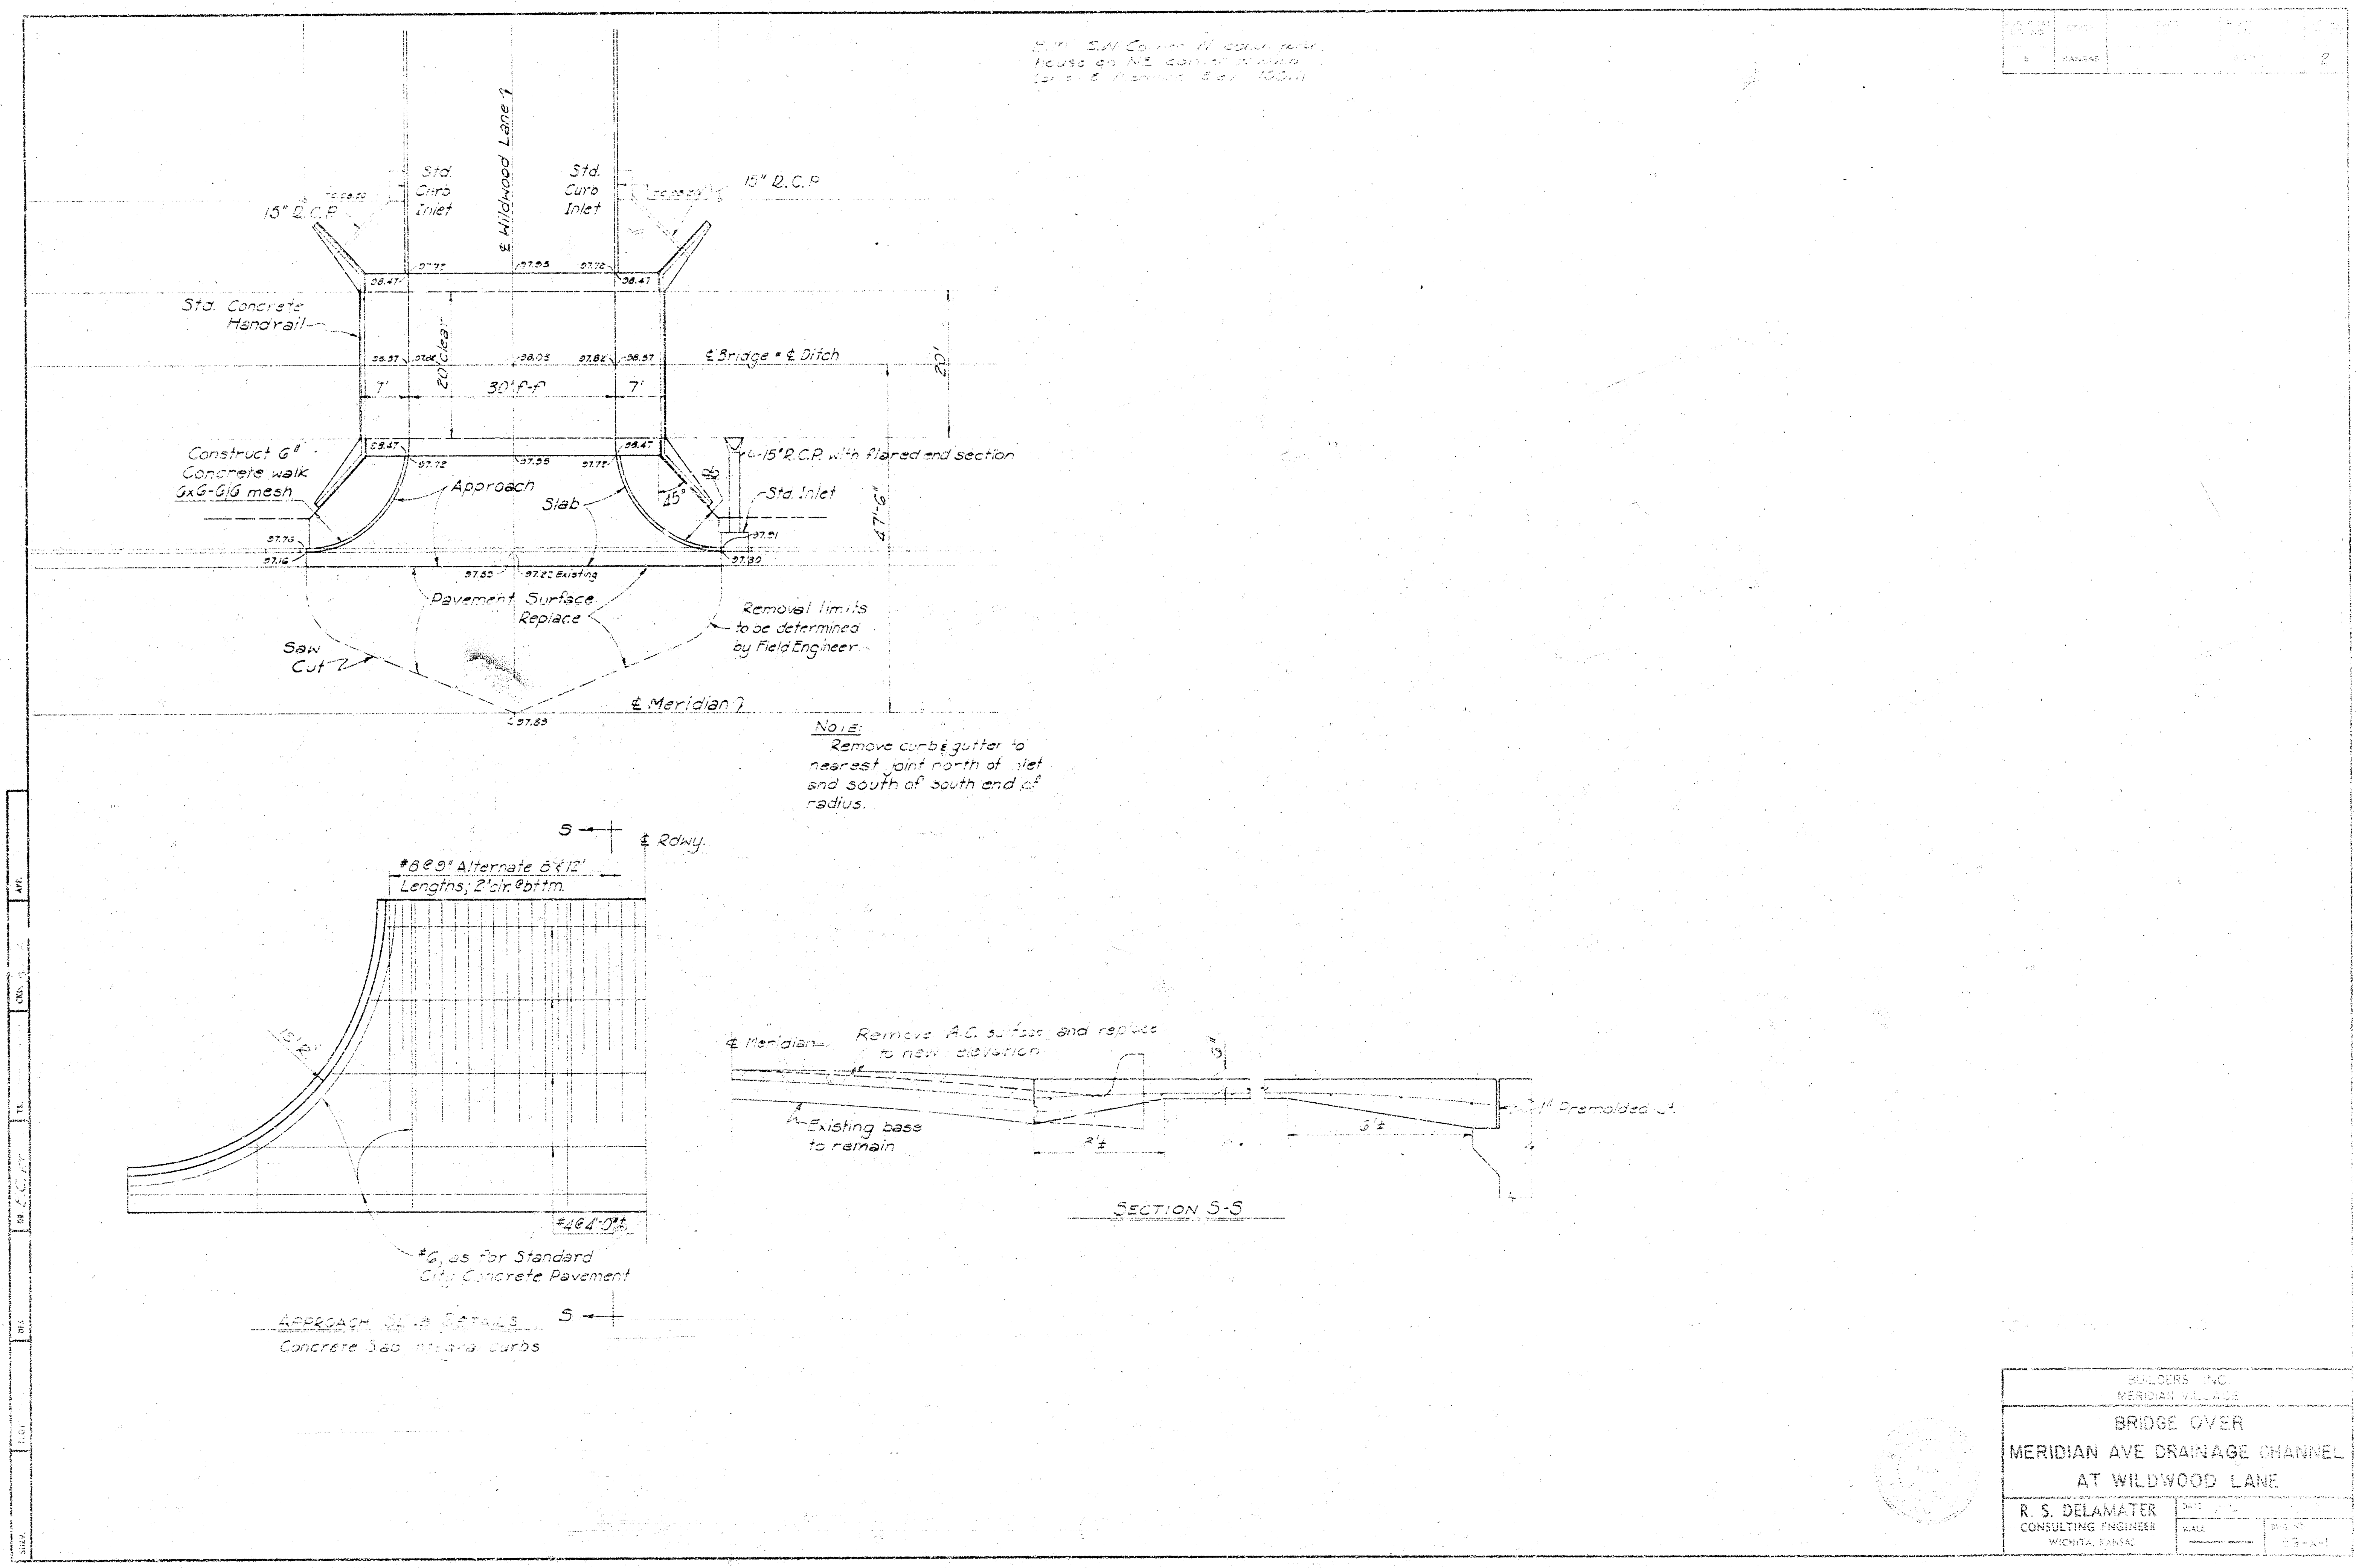
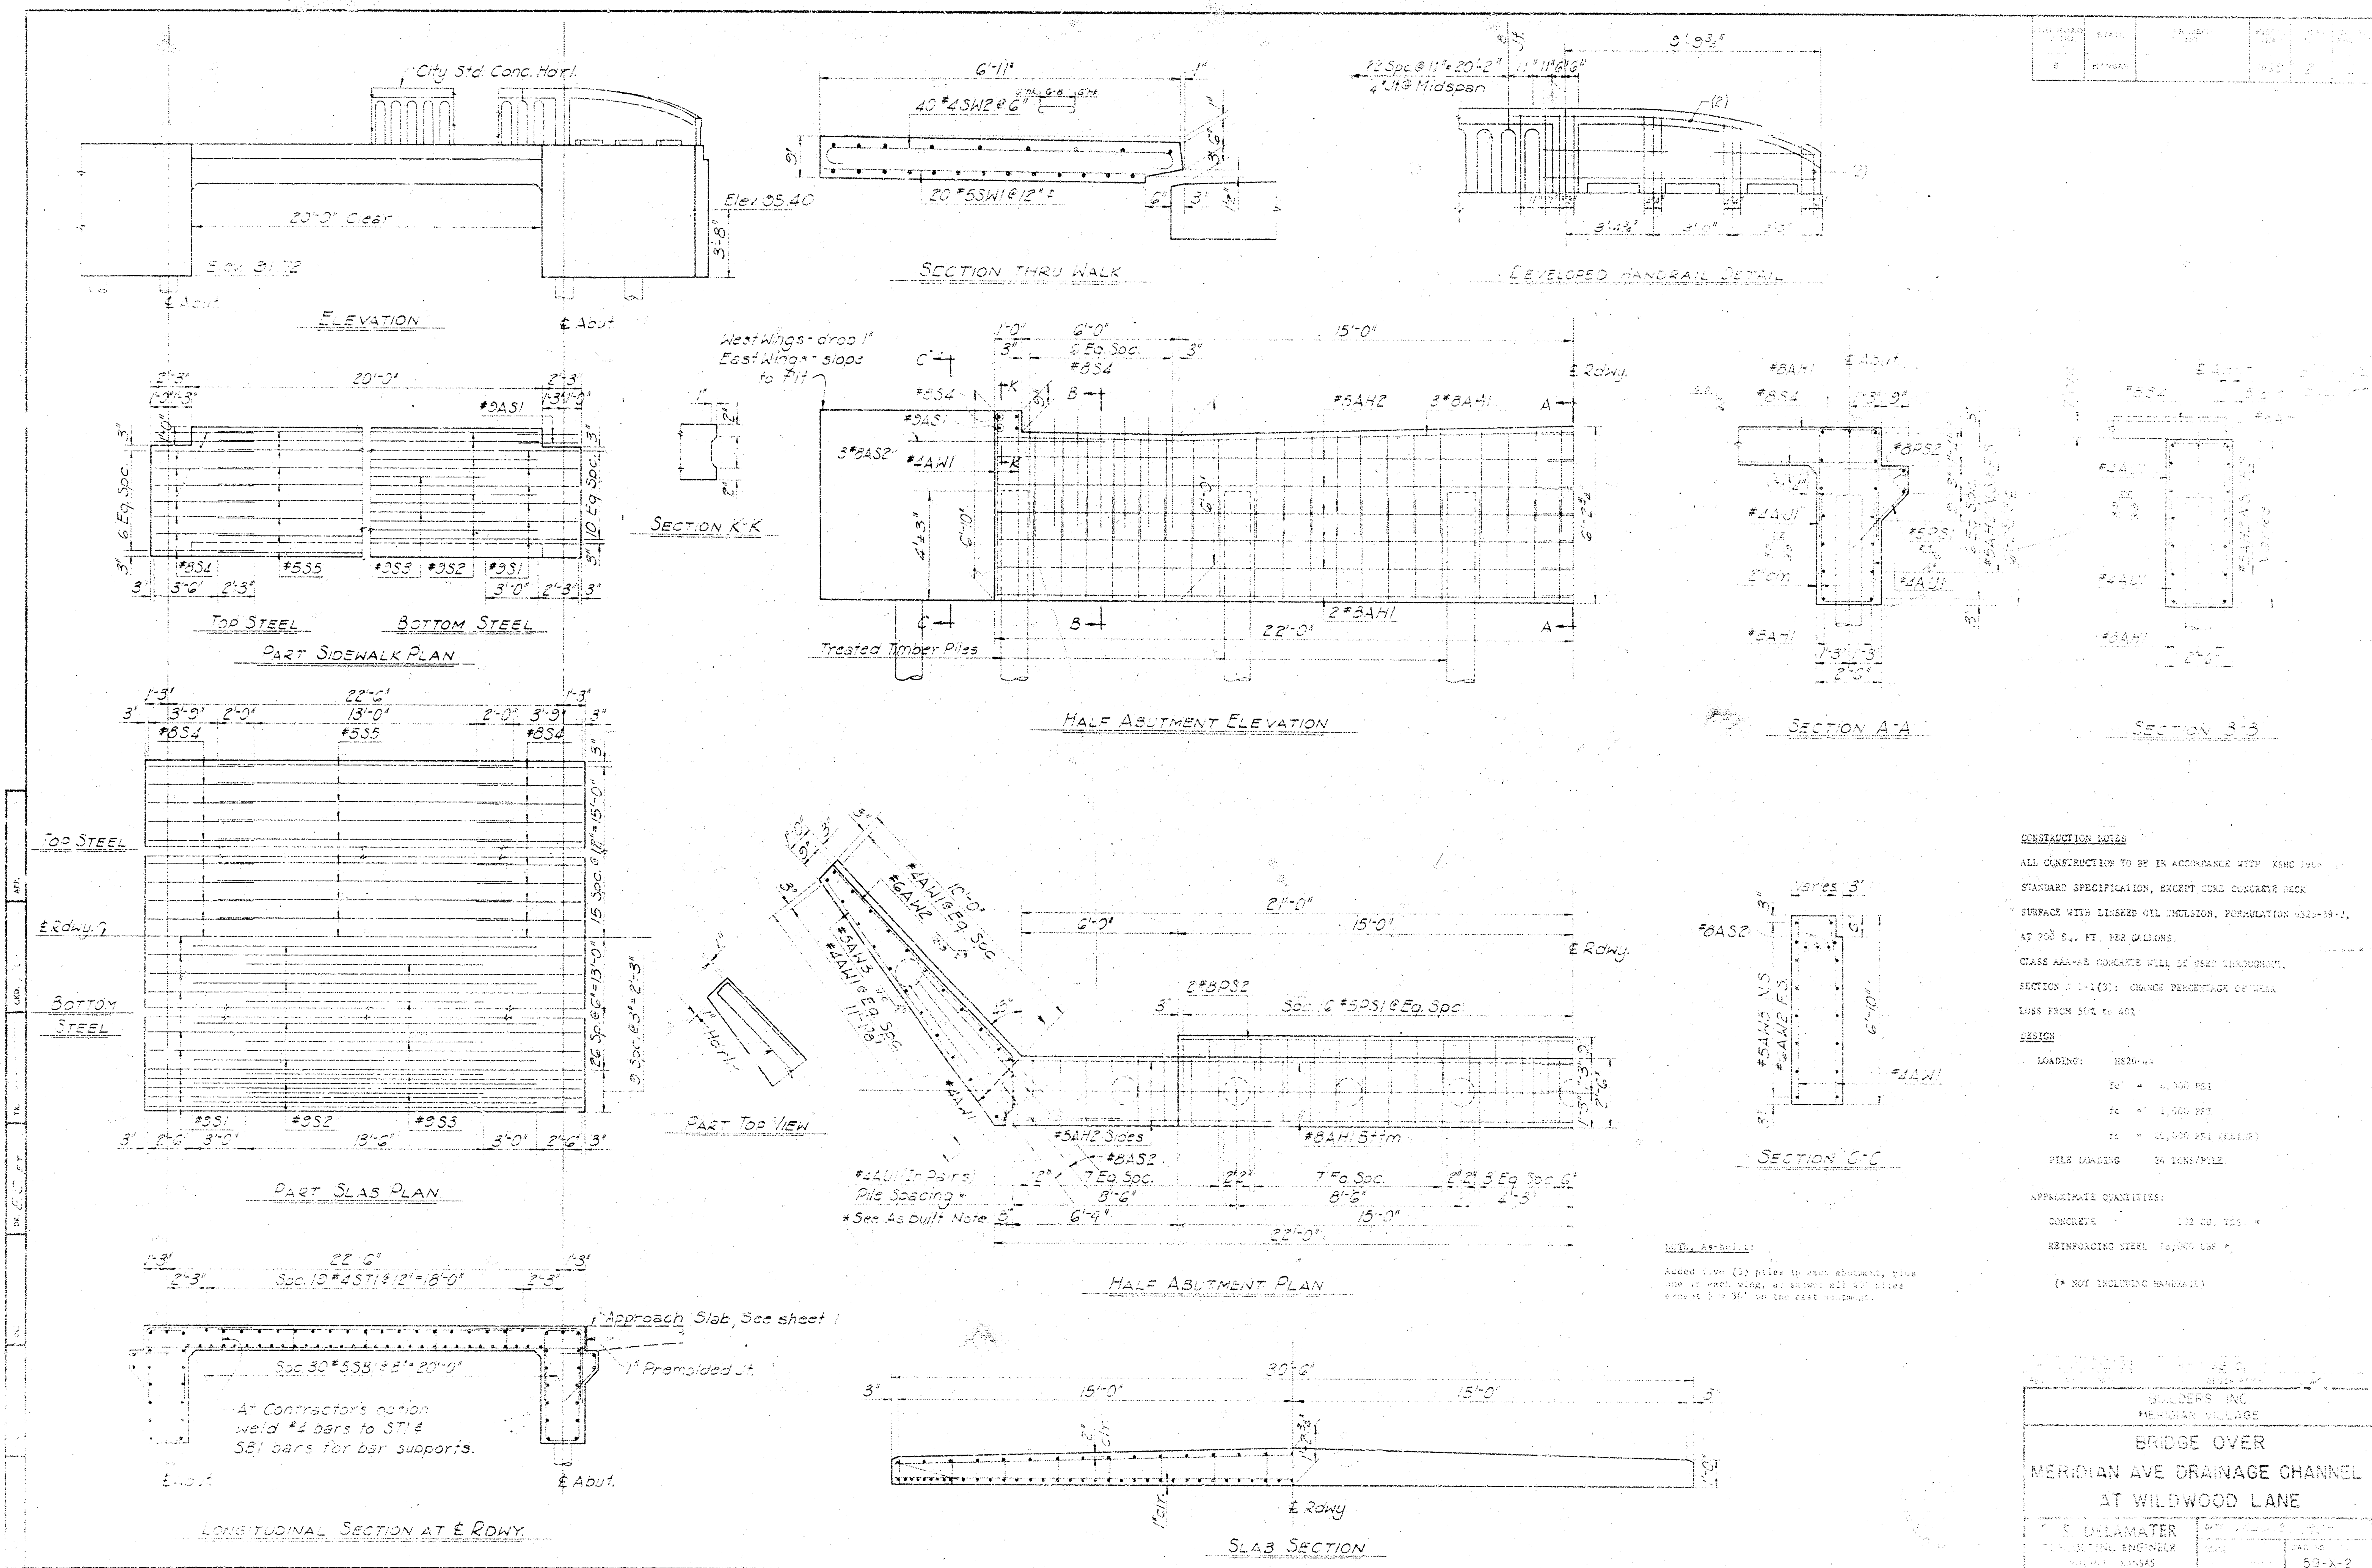
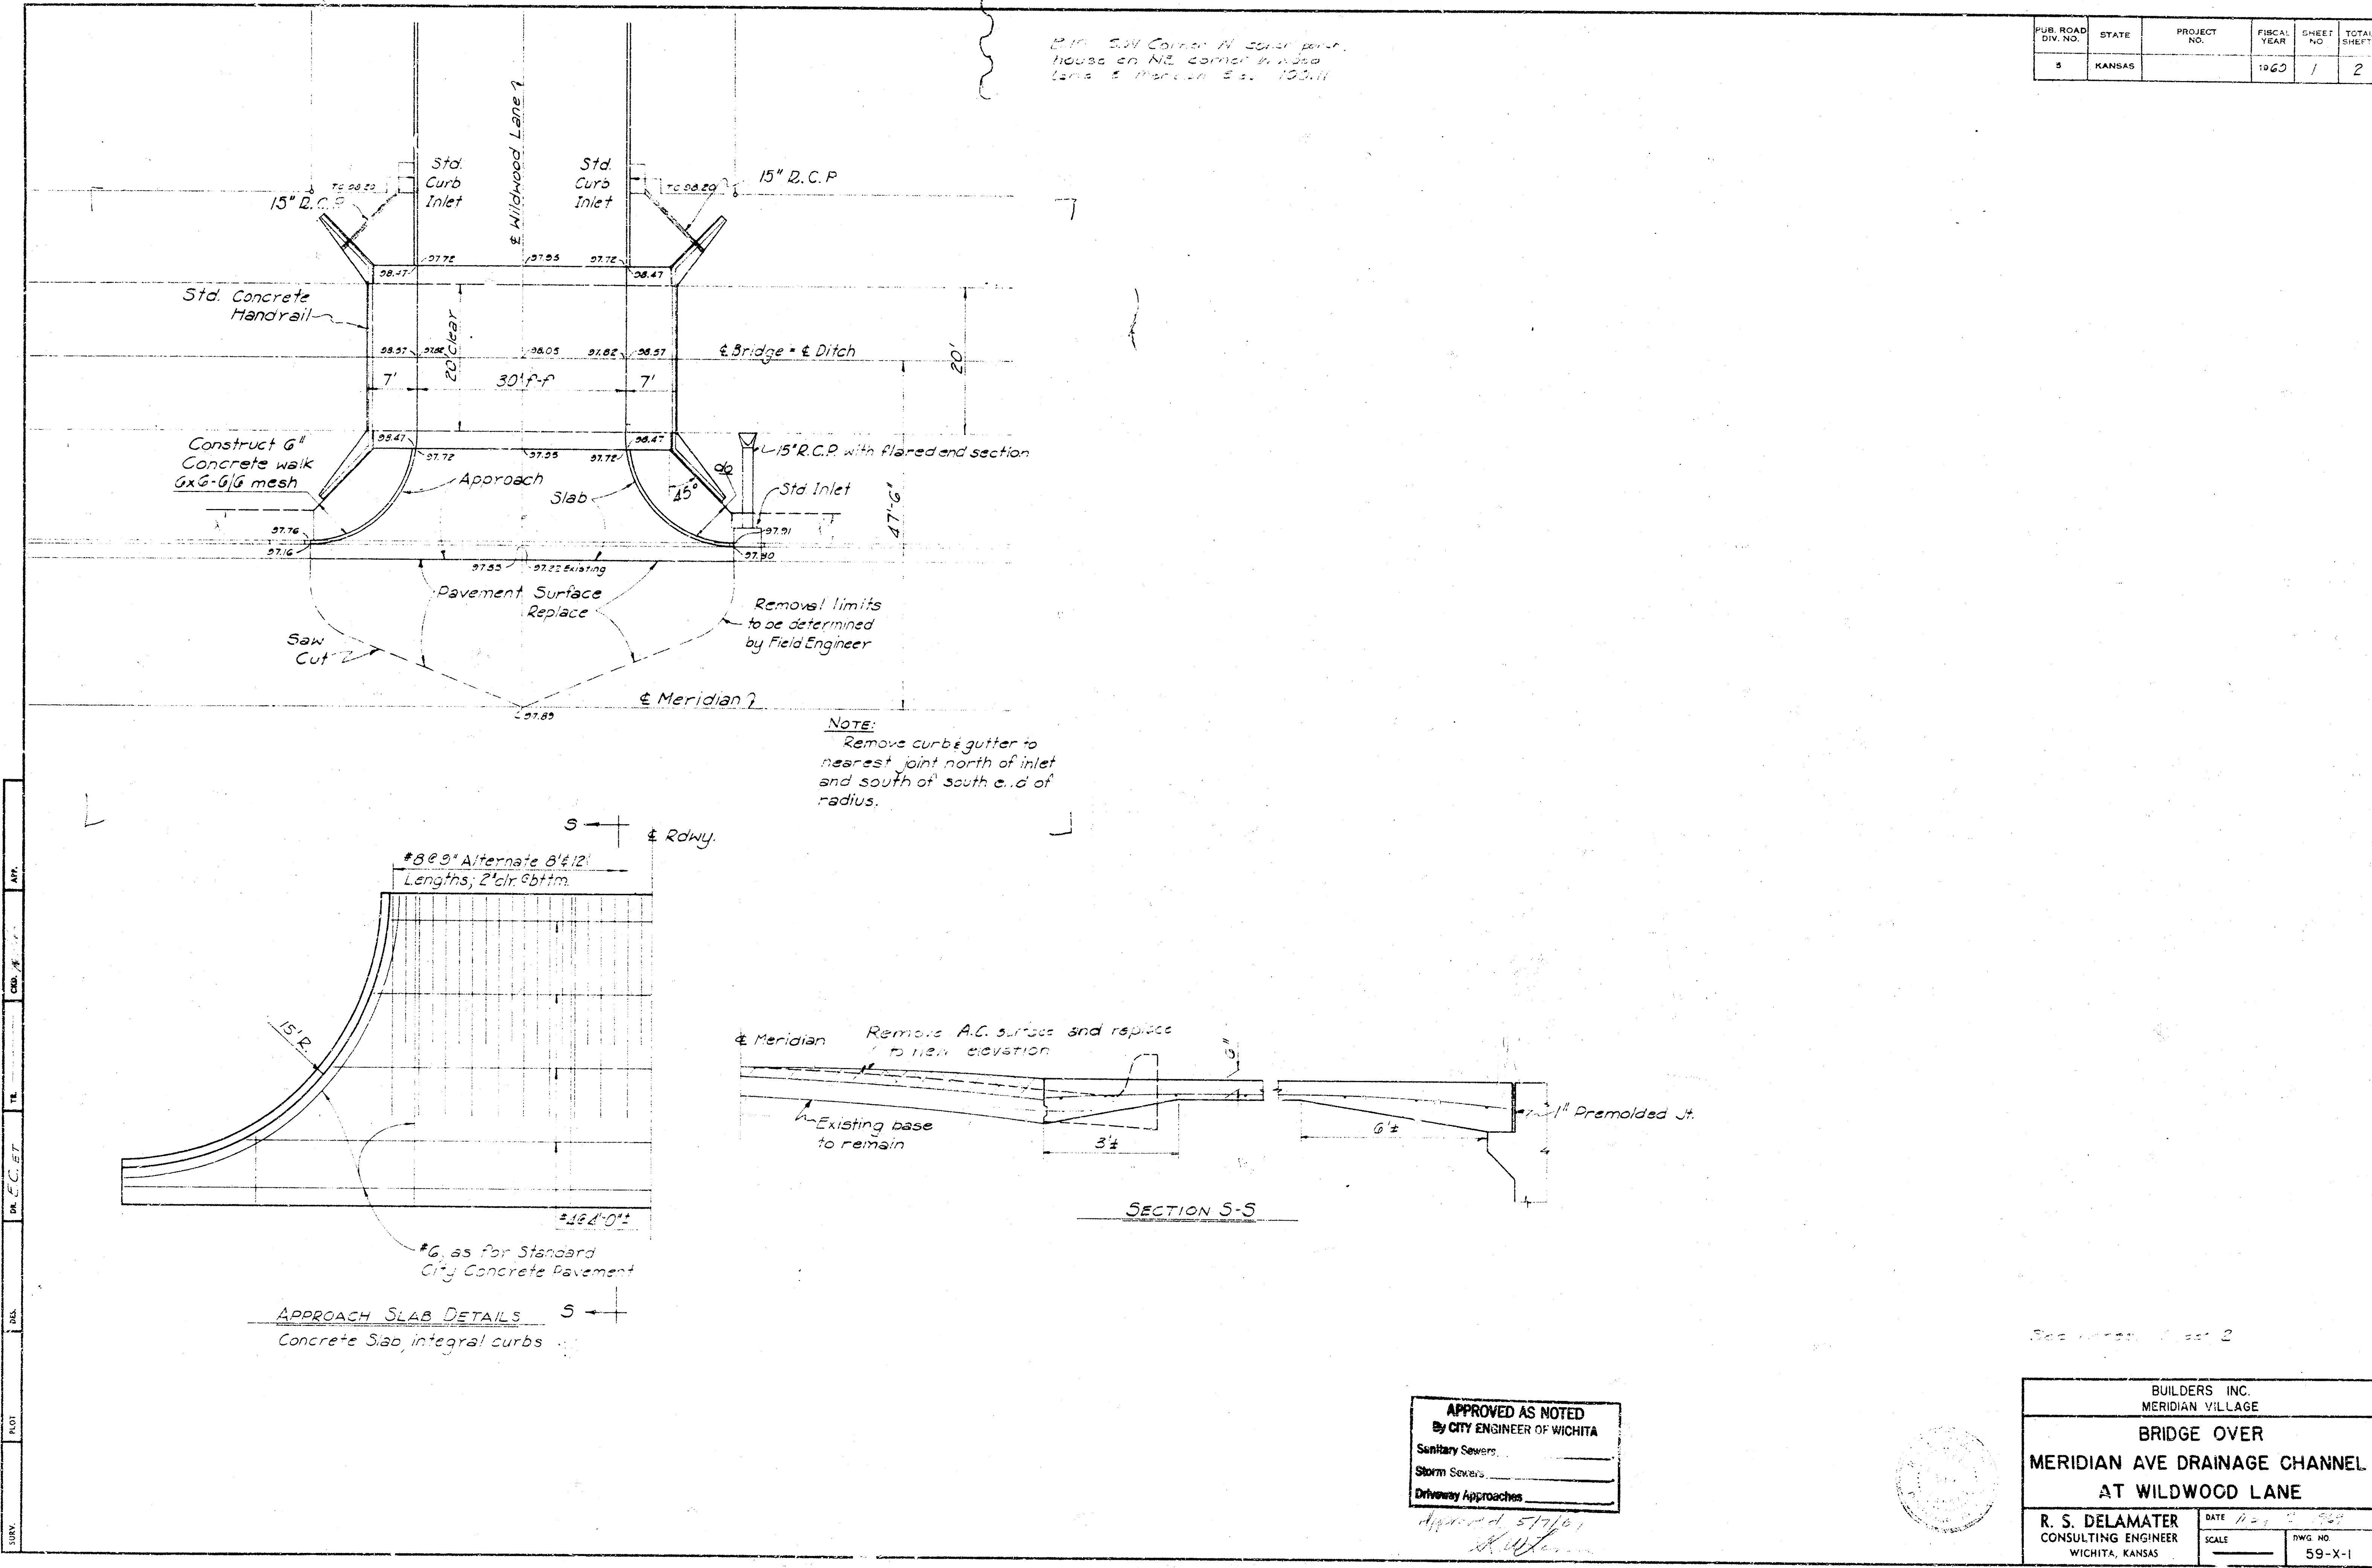
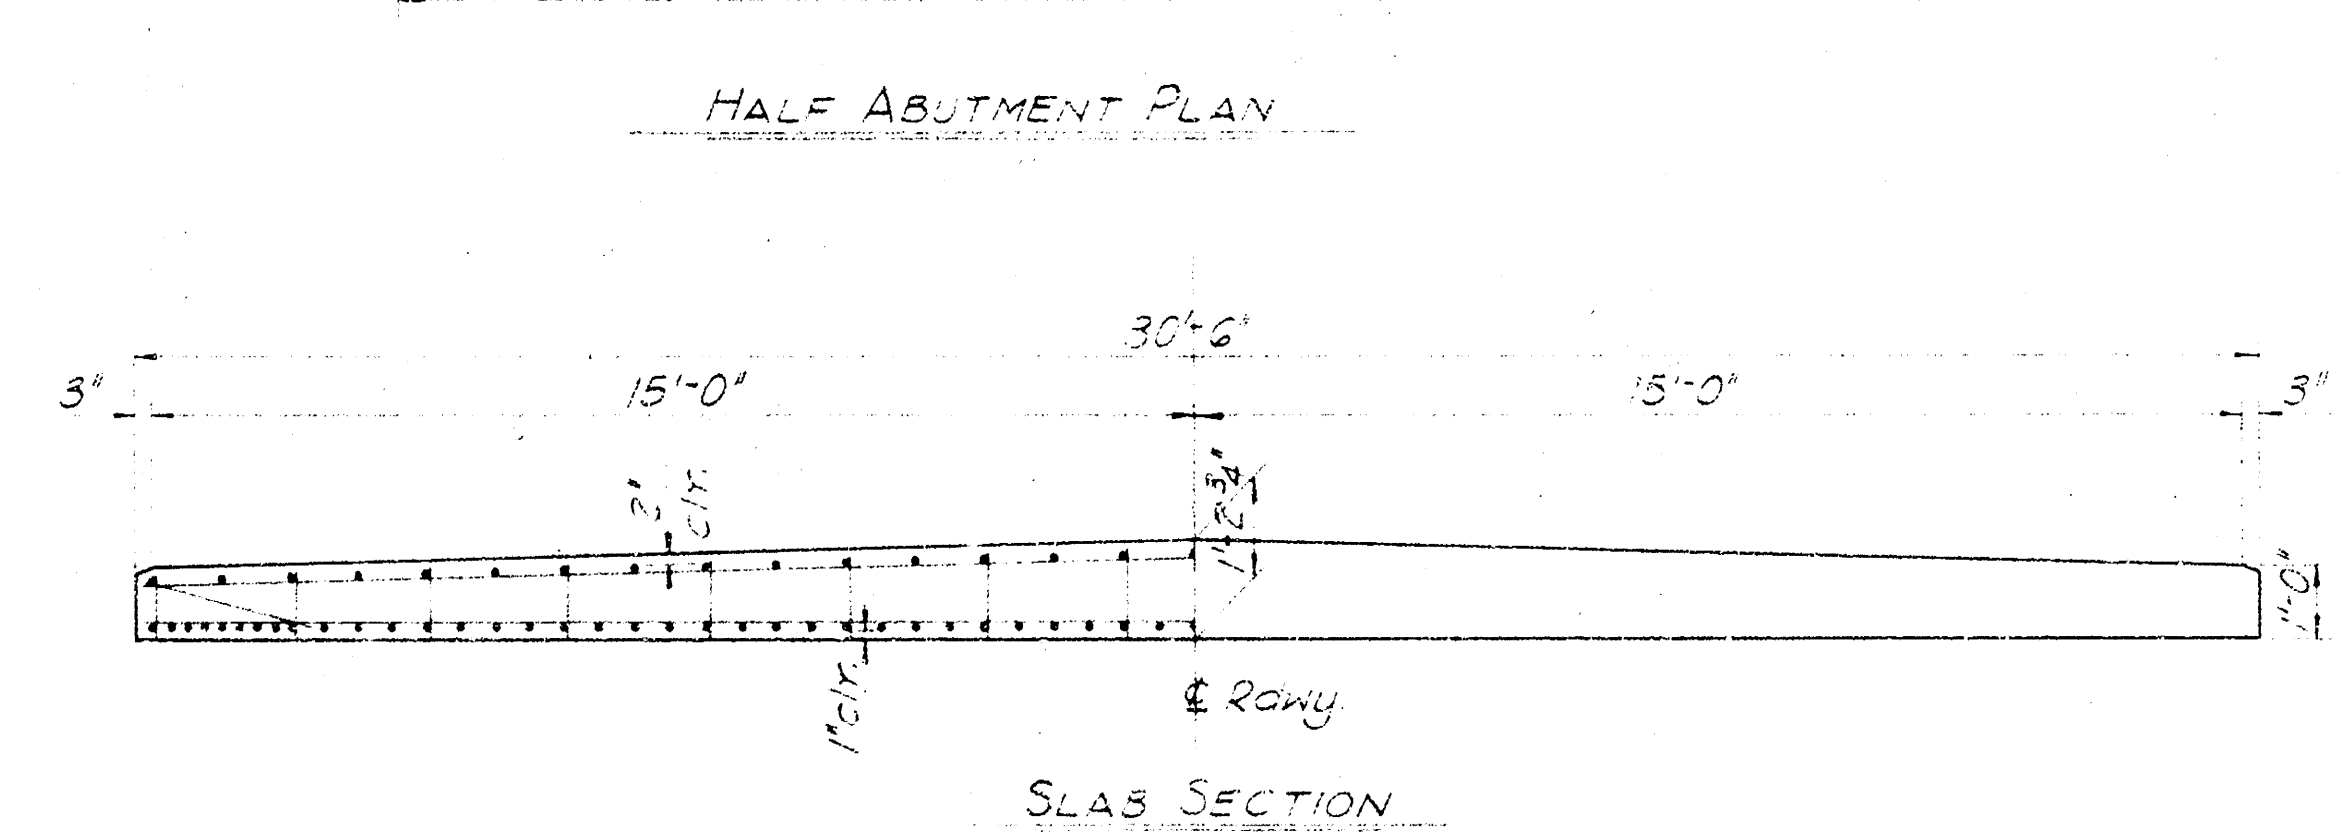
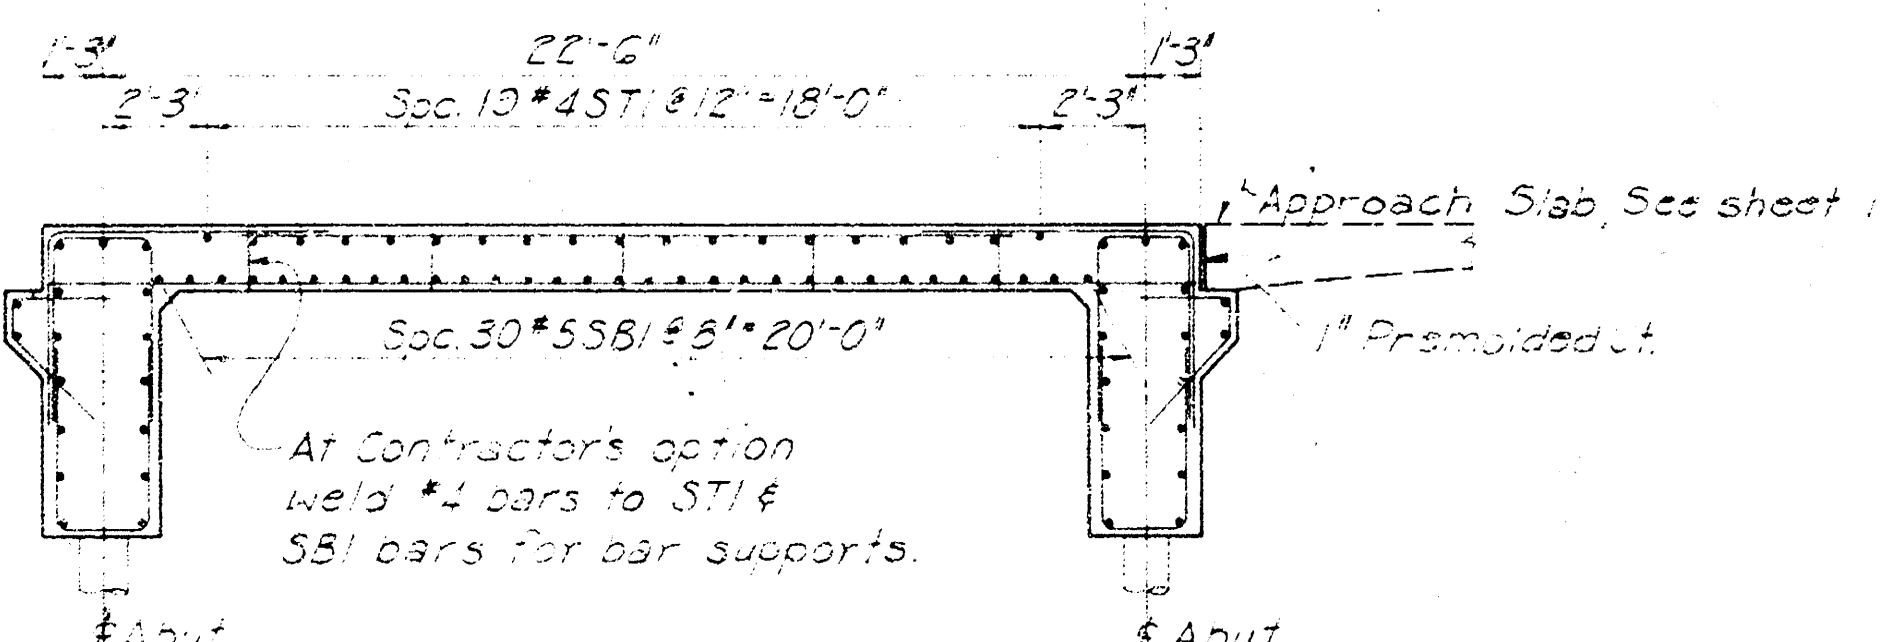
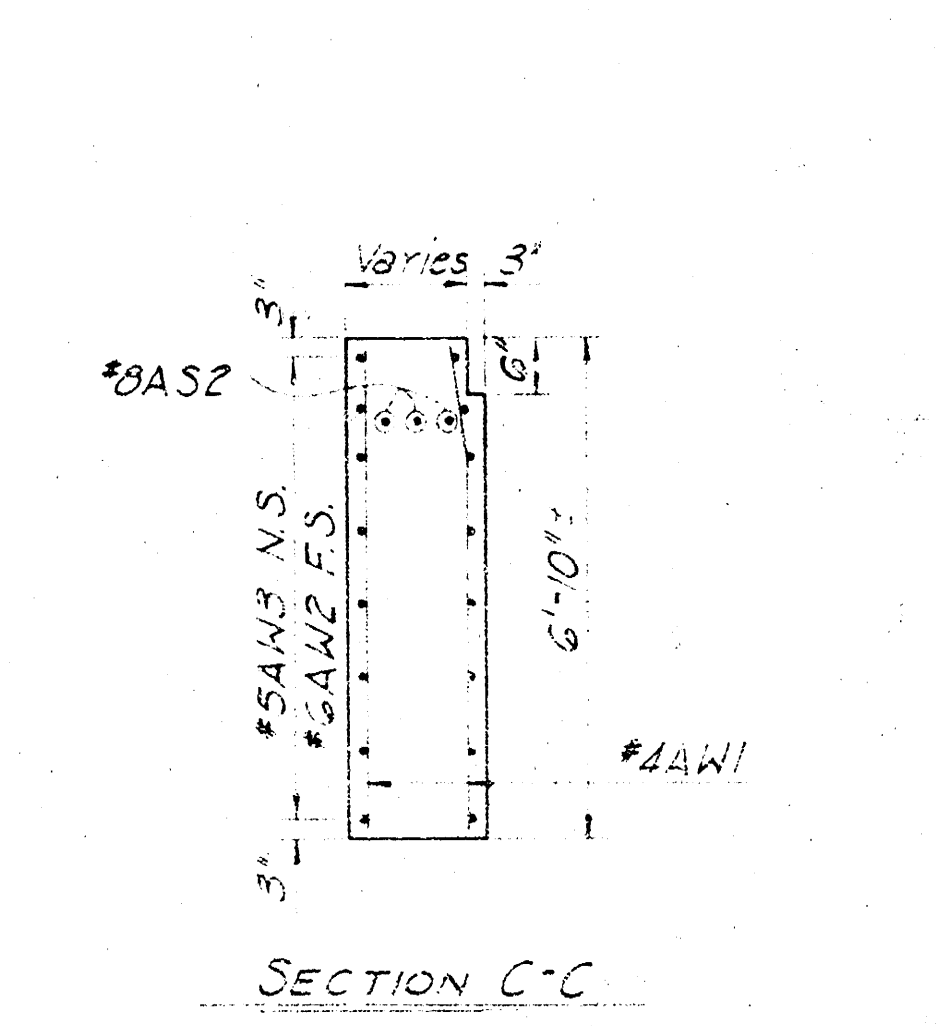
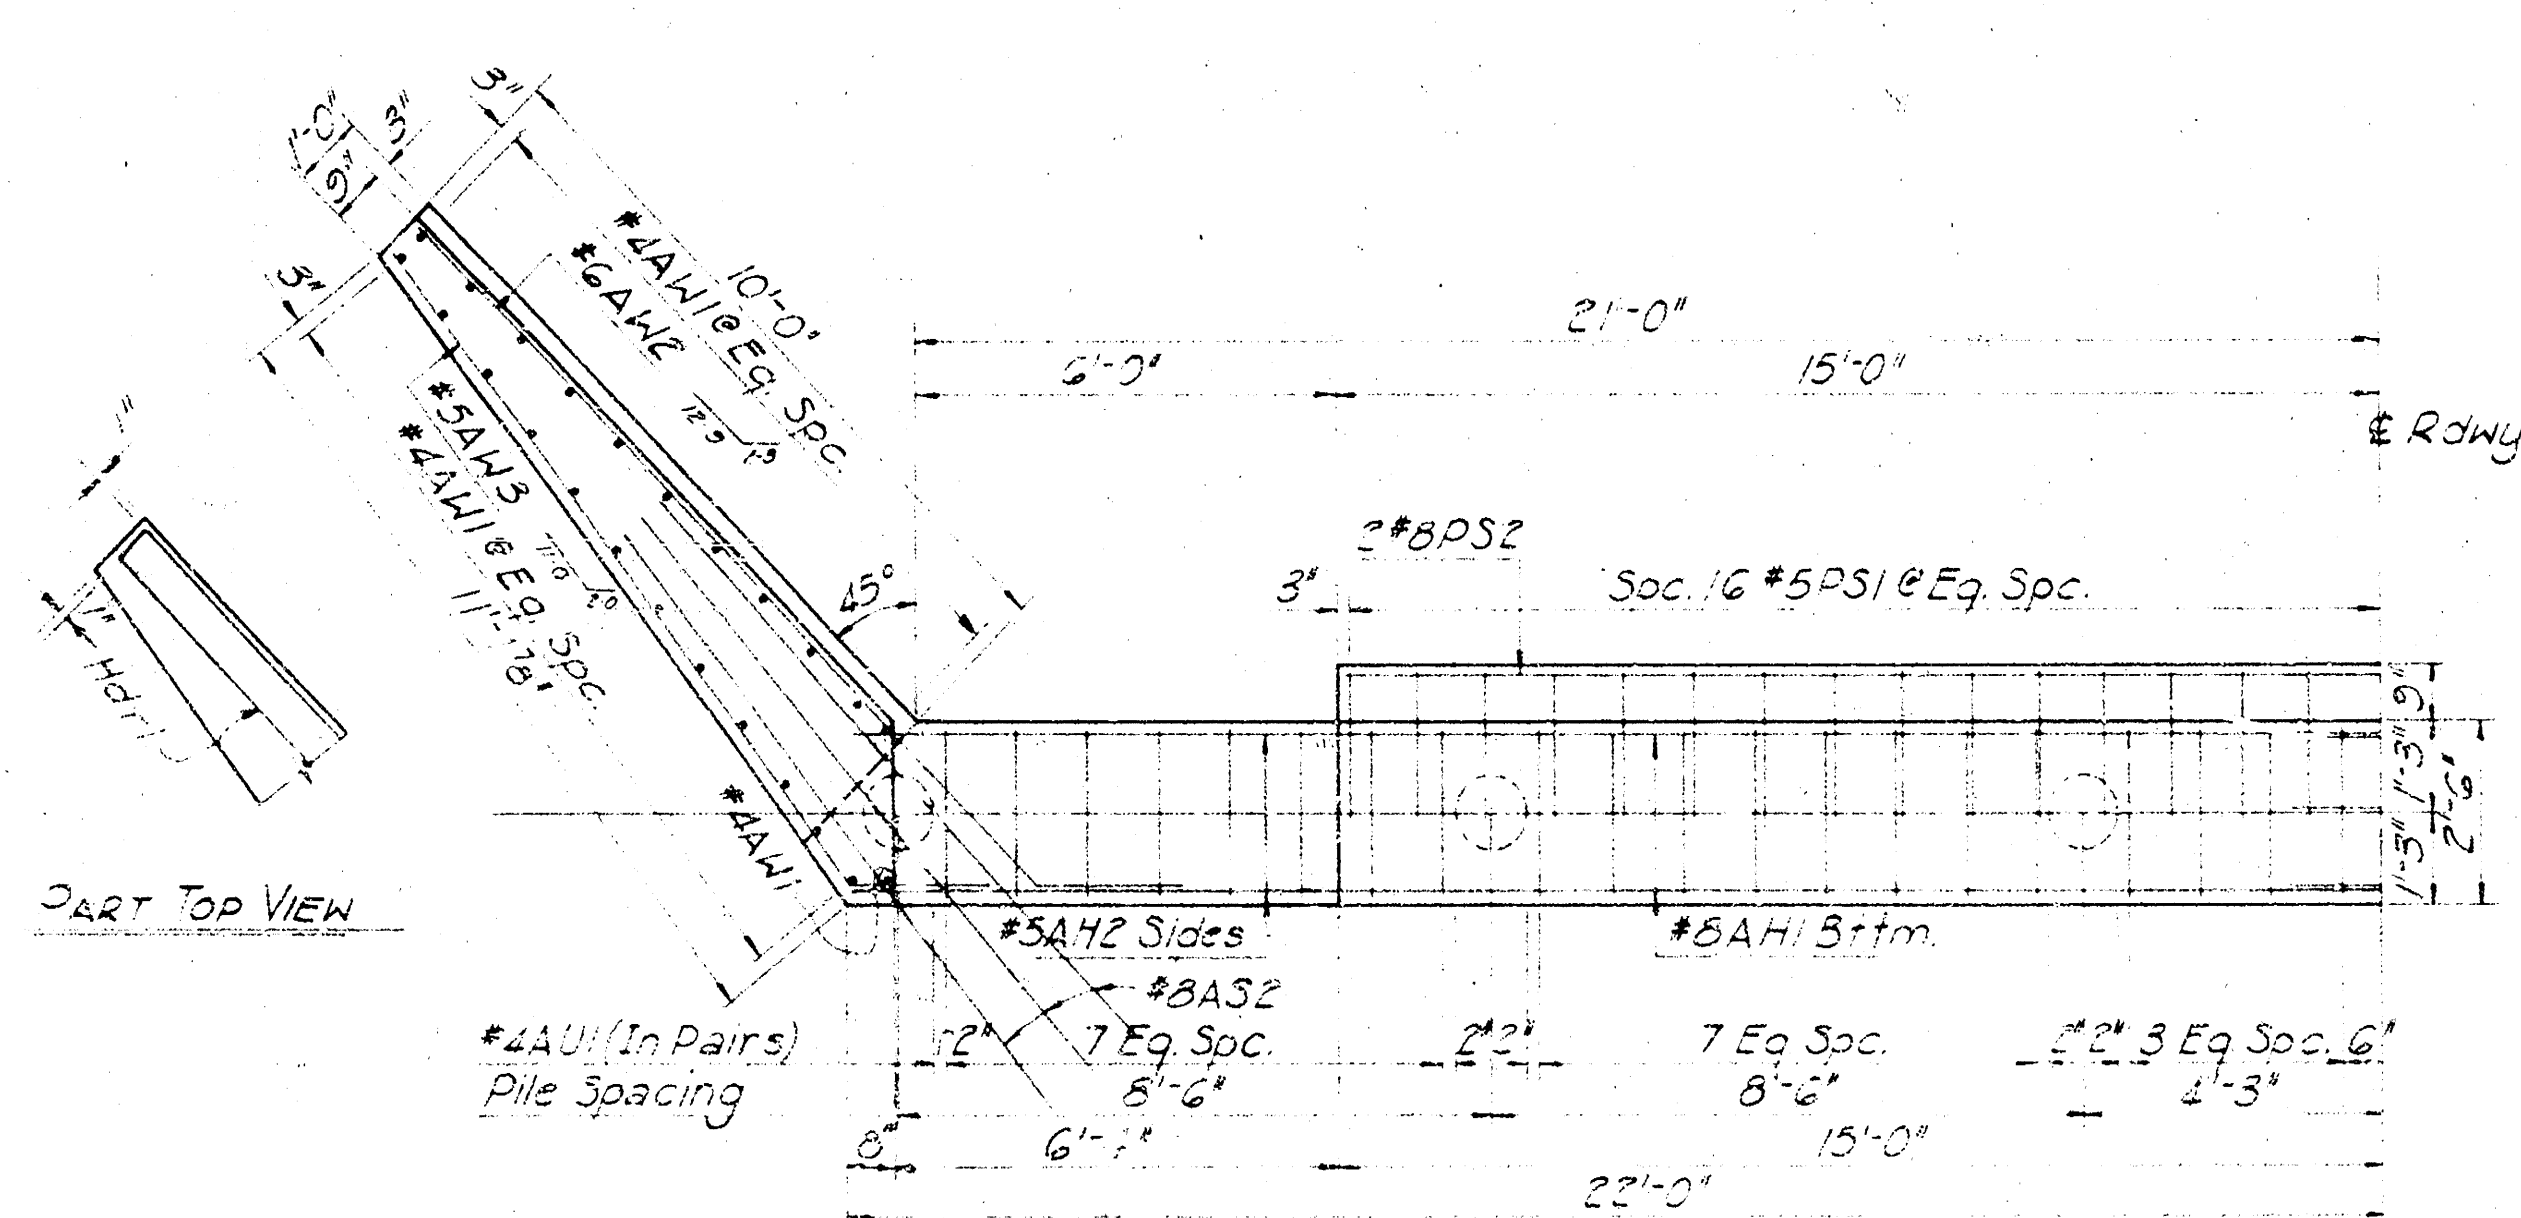
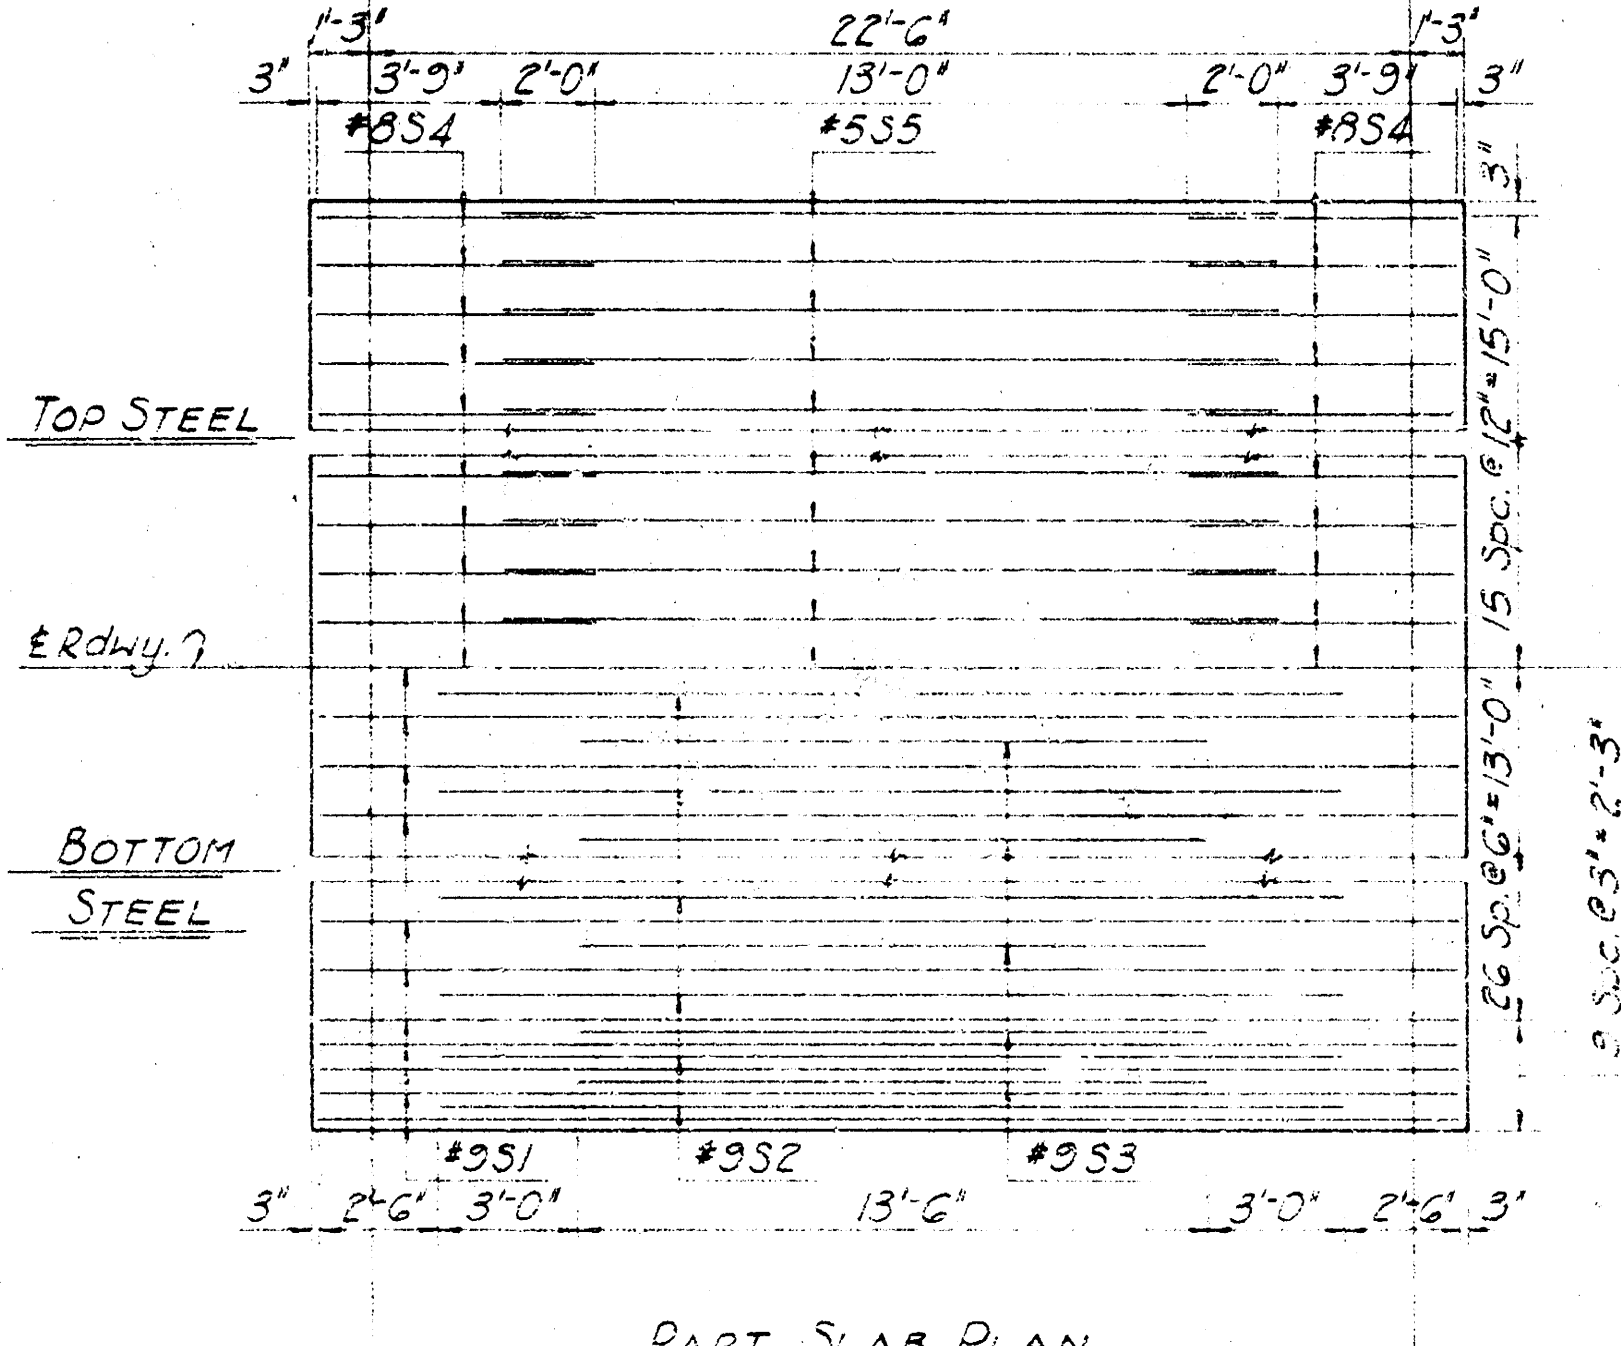
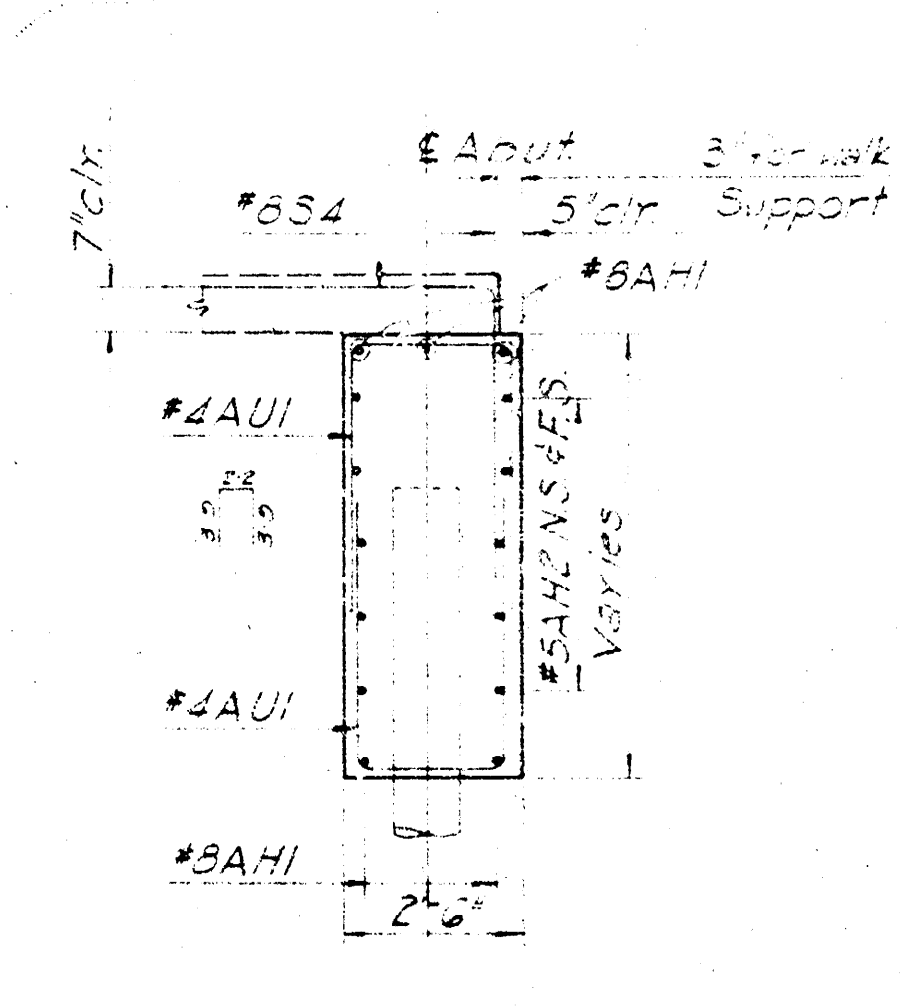
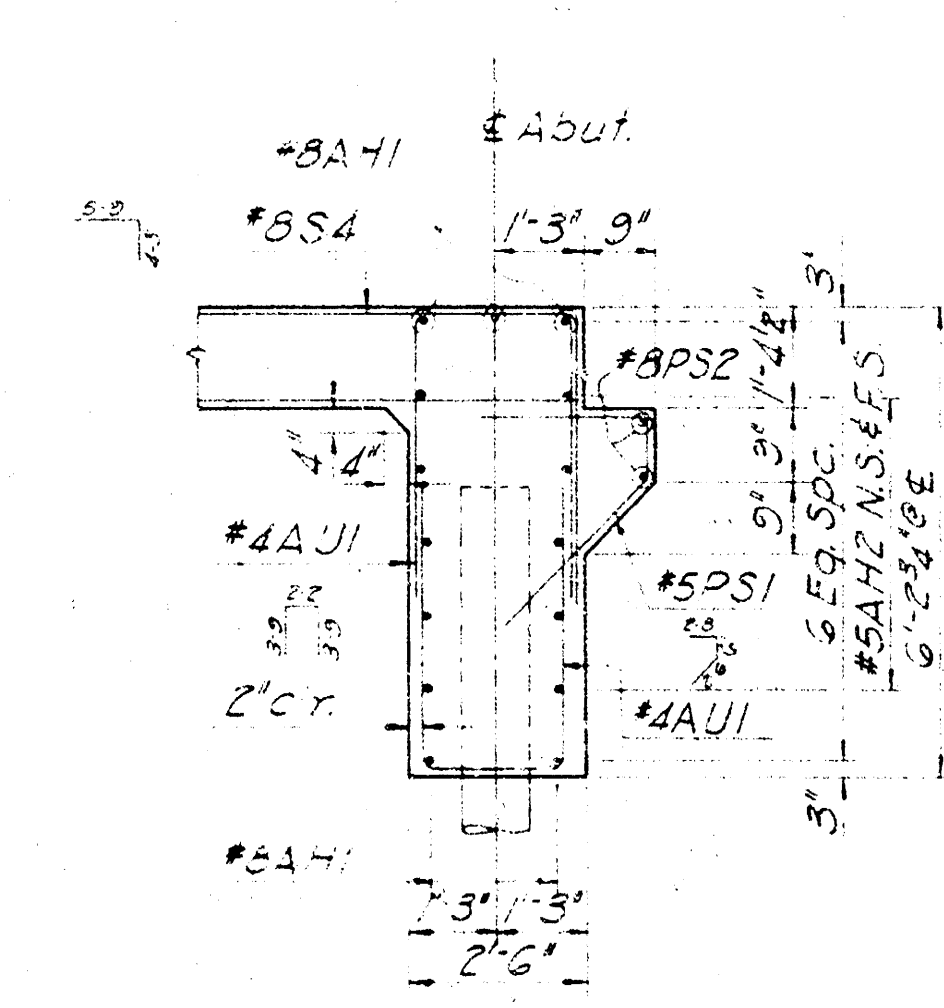


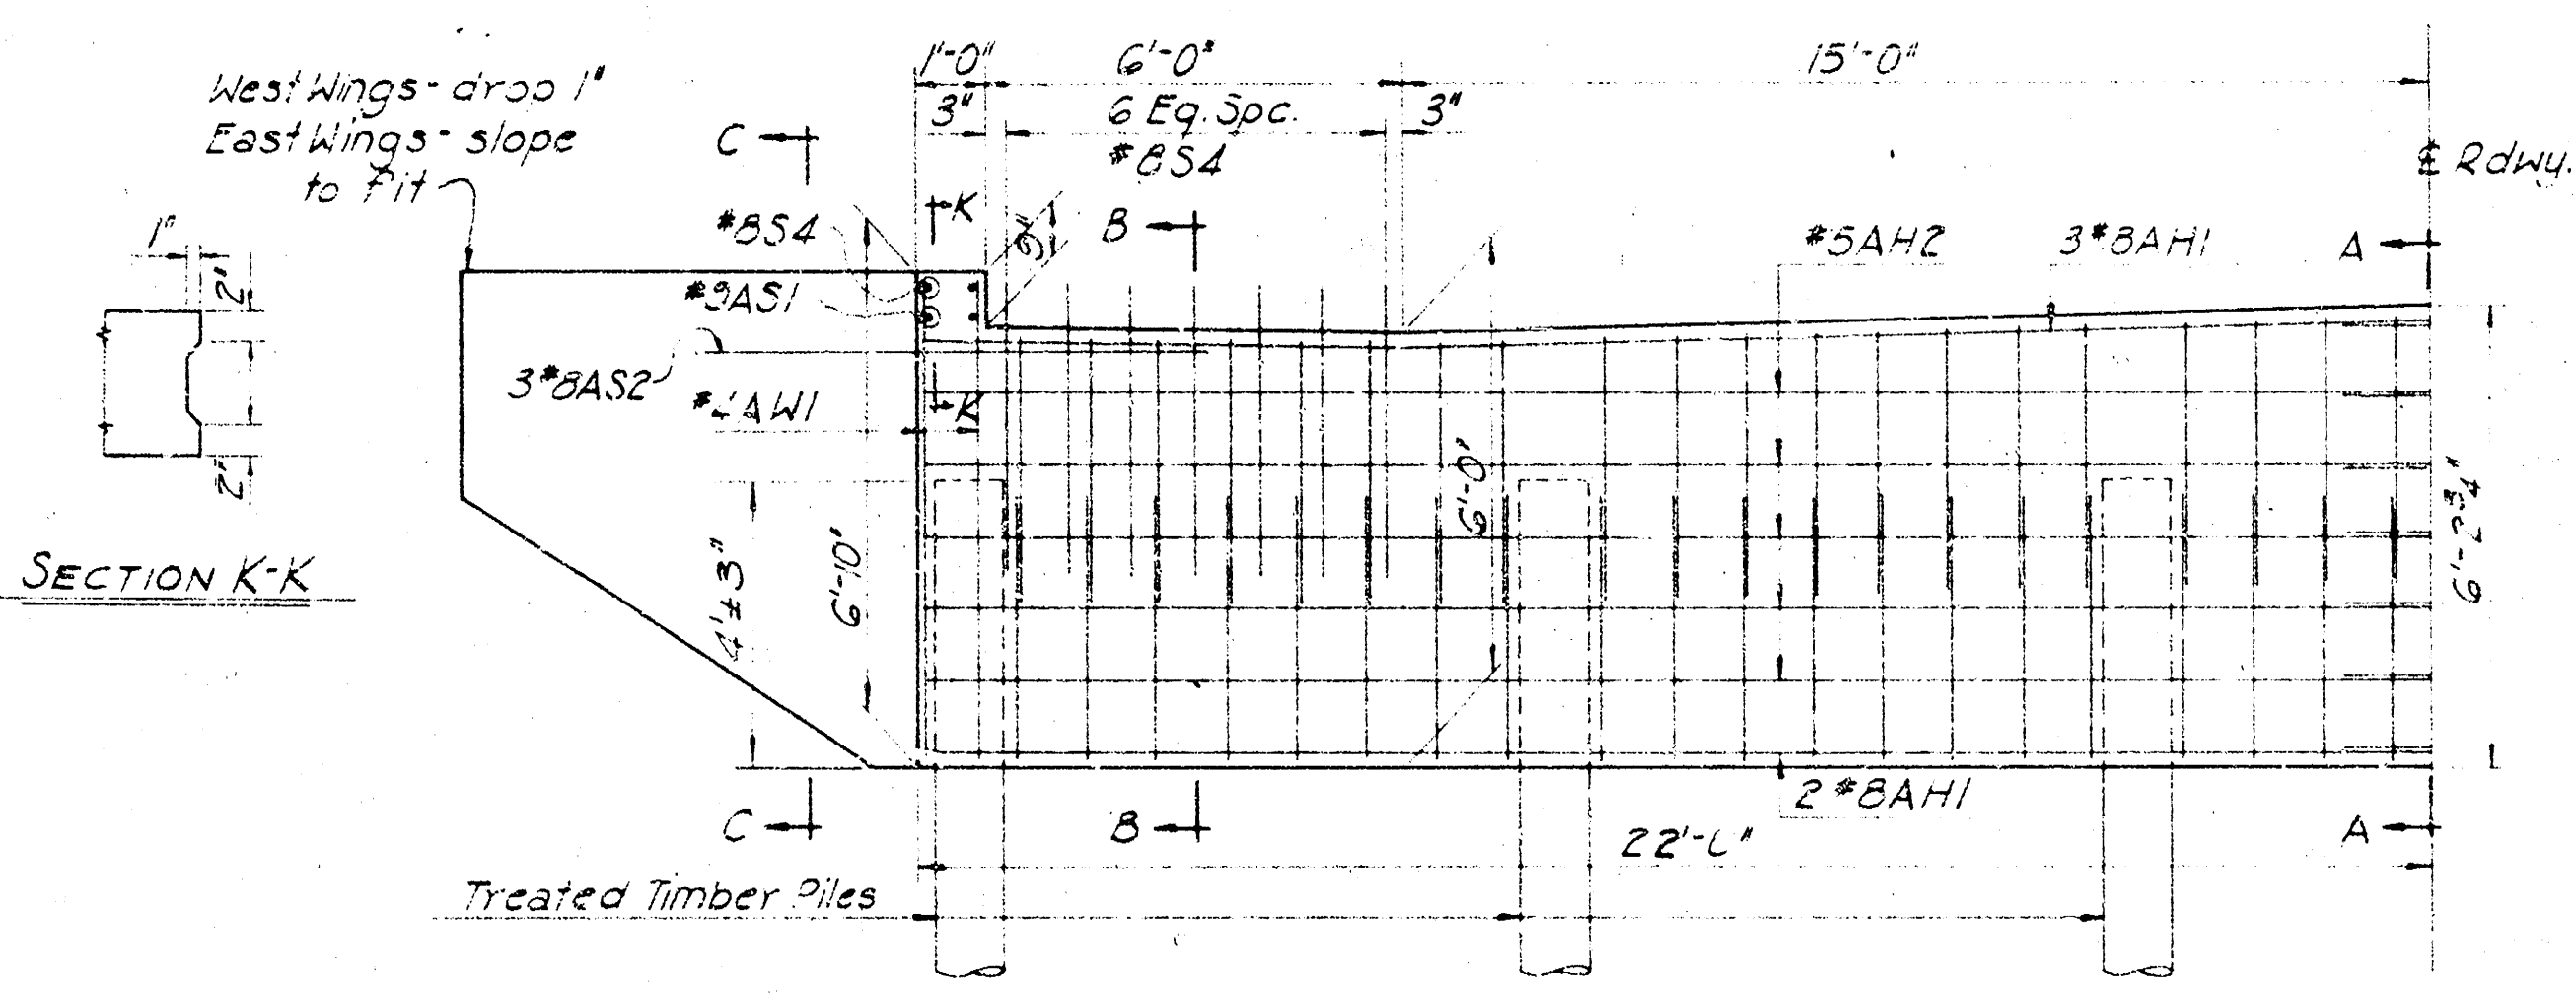

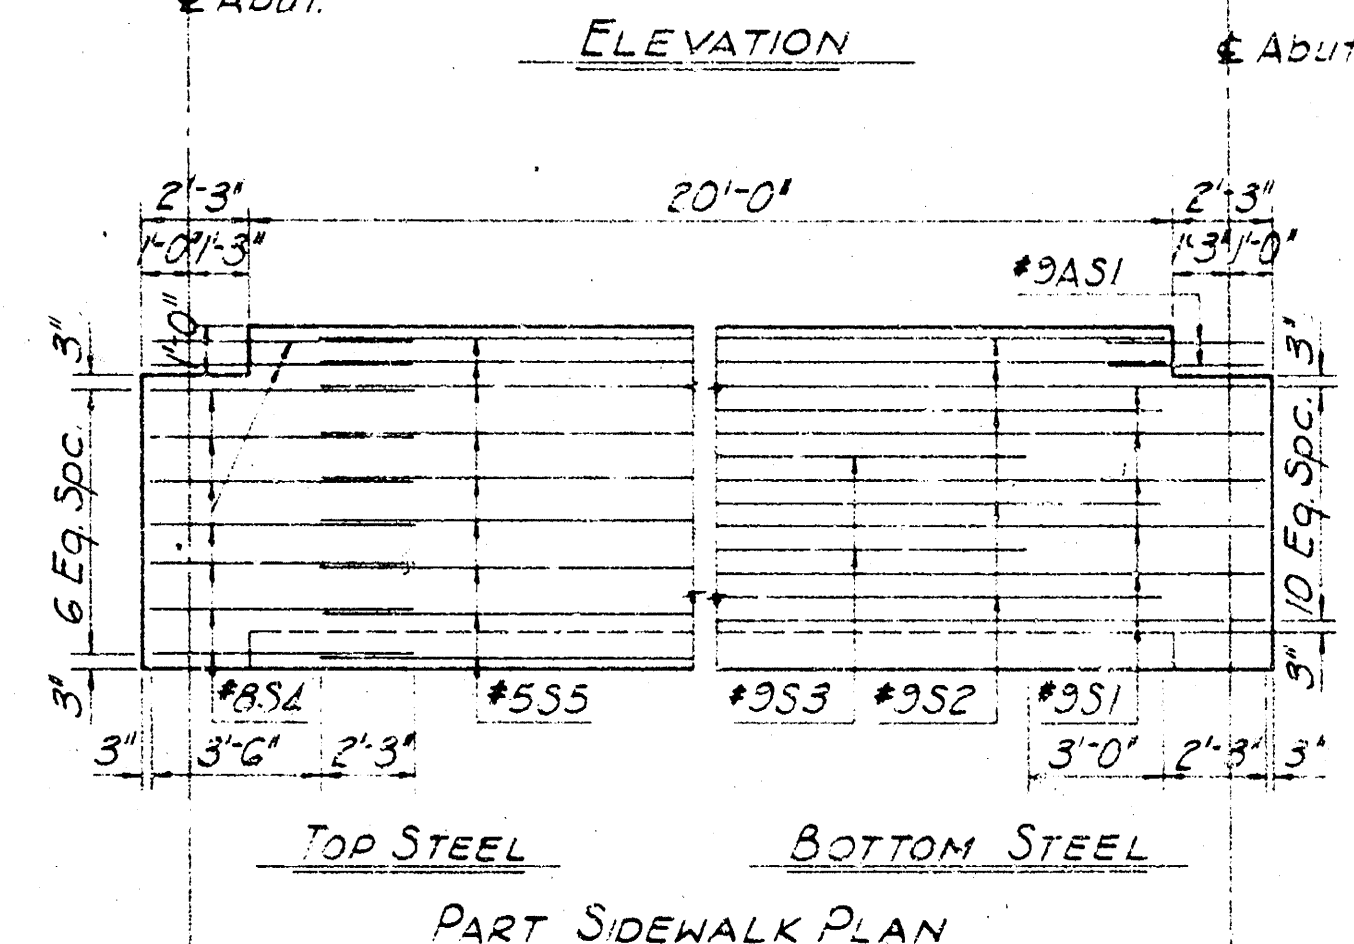

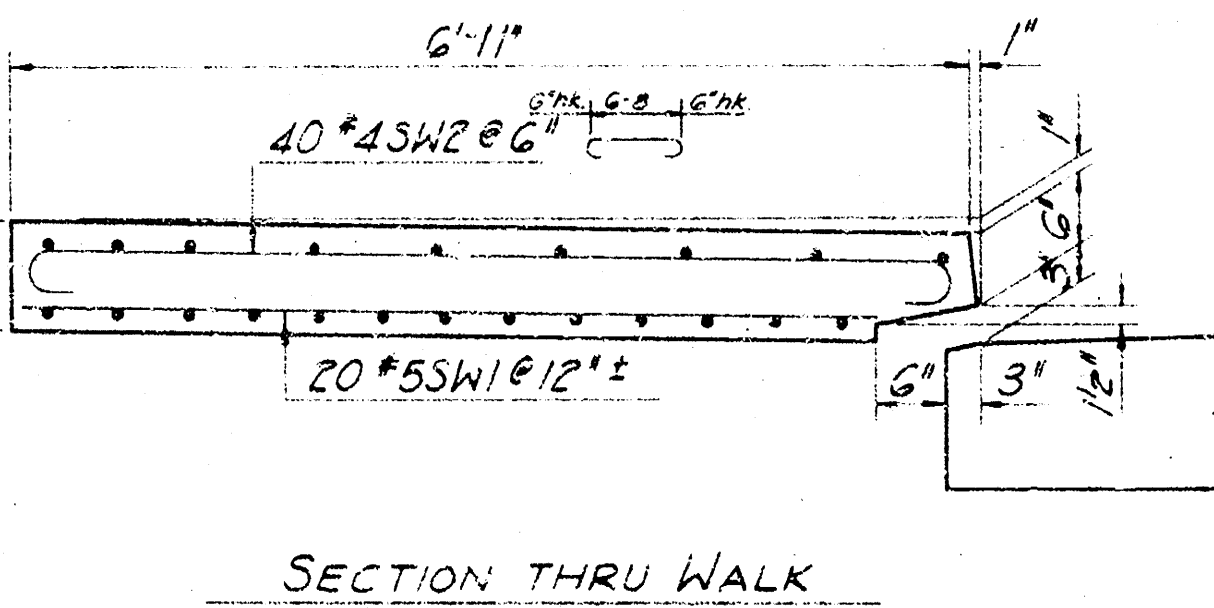

FOR ROAD DIV. NO.	STATE	PROJECT NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
5	KANSAS		1962	2	2

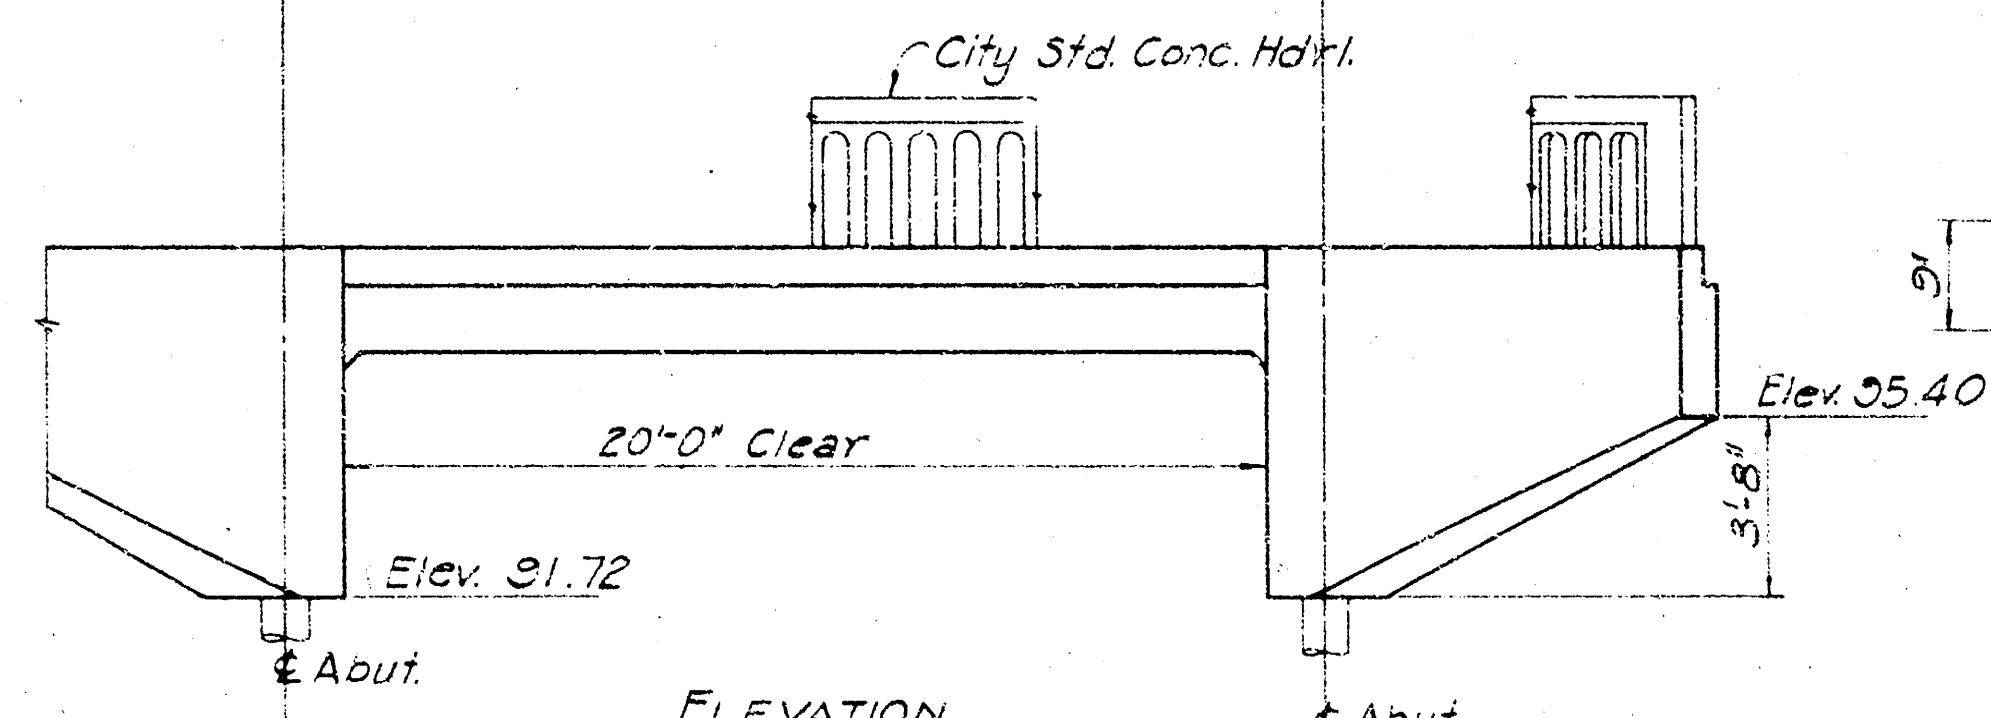

CONSTRUCTION NOTES

ALL CONSTRUCTION TO BE IN ACCORDANCE WITH KSCC 1966 STANDARD SPECIFICATION, EXCEPT CURE CONCRETE DECK SURFACE WITH LINSEED OIL EMULSION, FORMULATION 6325-39-2, AT 200 SQ. FT. PER GALLON.

CLASS AAA-AE CONCRETE WILL BE USED THROUGHOUT.

SECTION J-1(1): CHANGE PERCENTAGE OF WEAR LOSS FROM 50% TO 40%.

DESIGN

LOADING: HS20-44

$f_c = 4,000$ PSI

$f_c = 1,800$ PSI

$f_s = 20,000$ PSI (REINF)

PILE LOADING 24 TONS/PILE

APPROXIMATE QUANTITIES:

CONCRETE 102 CU. YDS. *

REINFORCING STEEL 18,000 LBS. *

(* NOT INCLUDING HANDRAIL)

BUILDERS, INC. MERIDIAN VILLAGE	
BRIDGE OVER MERIDIAN AVE DRAINAGE CHANNEL AT WILDWOOD LANE	
R. S. DELAMATER CONSULTING ENGINEER WICHITA, KANSAS	CHECKED BY DATE 59-X-2