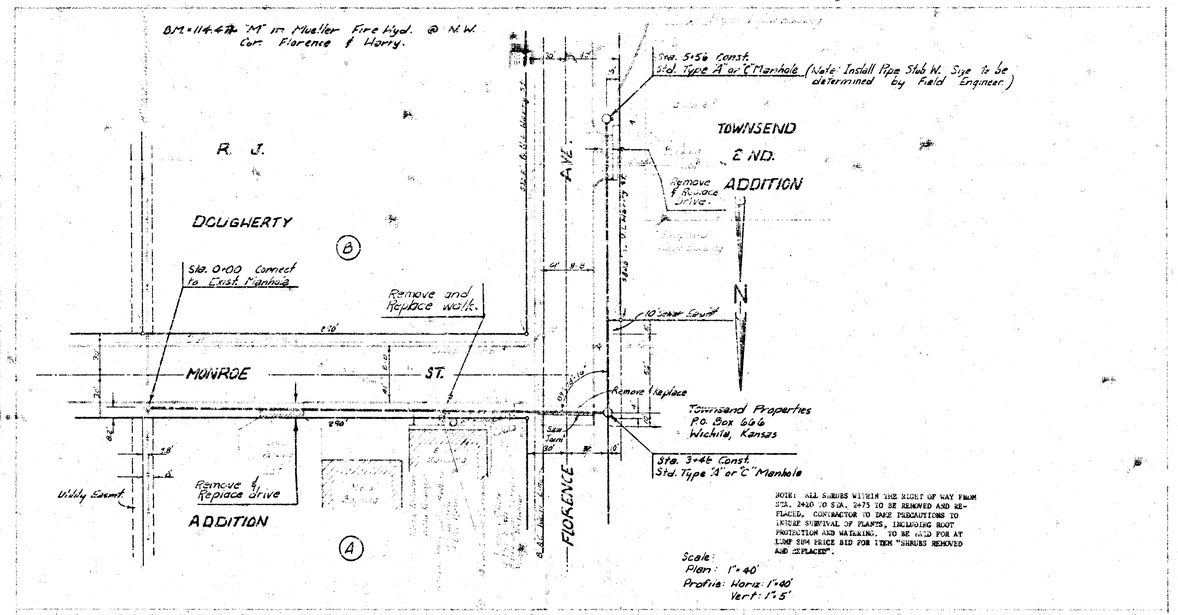

B.M.=1144.47 "M" in Mueller Fire Hyd. @ N.W. Cor. Florence & Harry.
Sta. 5+56 Const. Std. Type 'A' or 'C' Manhole (Note: Install Pipe Stub W. Sye to be determined by Field Engineer)
TOWNSEND
2 ND.
ADDITION
R. J.
DOUGHERTY
B
Remove & Replace Drive.
Sta. 0+00 Connect to Exist. Manhole
Remove and Replace walk.
10' Sewer Easmt
MONROE
ST.
Remove & Replace
Townsend Properties
P.O. Box 646
Wichita, Kansas
Sta. 3+46 Const. Std. Type 'A' or 'C' Manhole
Utility Easmt
Remove & Replace Drive
ADDITION
A
FLORENCE
AVE.
NOTE: ALL SHRUBS WITHIN THE RIGHT OF WAY FROM STA. 2+40 TO S.A. 5+75 TO BE REMOVED AND REPLACED. CONTRACTOR TO TAKE PRECAUTIONS TO INSURE SURVIVAL OF PLANTS, INCLUDING ROOT PROTECTION AND WATERING. TO BE PAID FOR AT LUMP SUM PRICE BID FOR ITEM "SHRUBS REMOVED AND REPLACED".
Scale:
Plan: 1"=40'
Profile: Horiz: 1"=40'
Vert: 1"=5'
Sta. 0+00 Connect to Exist. Manhole
Sta. 3+46 Const. Std. Type 'A' or 'C' Manhole
Sta. 5+56 Const. Std. Type 'A' or 'C' Manhole
115
110
105
100
556 L.F. 8" Clay Pipe @ 0.20%
Fl. 106.56 Out
Fl. 106.67 In
Fl. 106.81
Fl. 107.33 Out
Fl. 107.43 In
Fl. 107.87
0
1
2
3
4
5
6
LAT 127
SAN. SEWER No. 22
CITY OF WICHITA, KANSAS
R.W. LINN - CITY ENGINEER
DATE: PROJ. No. DBKL574090