


3RD STREET
E.L. WICHITA STREET TO W.L. MAIN STREET
PROJECT No. WNKB501430

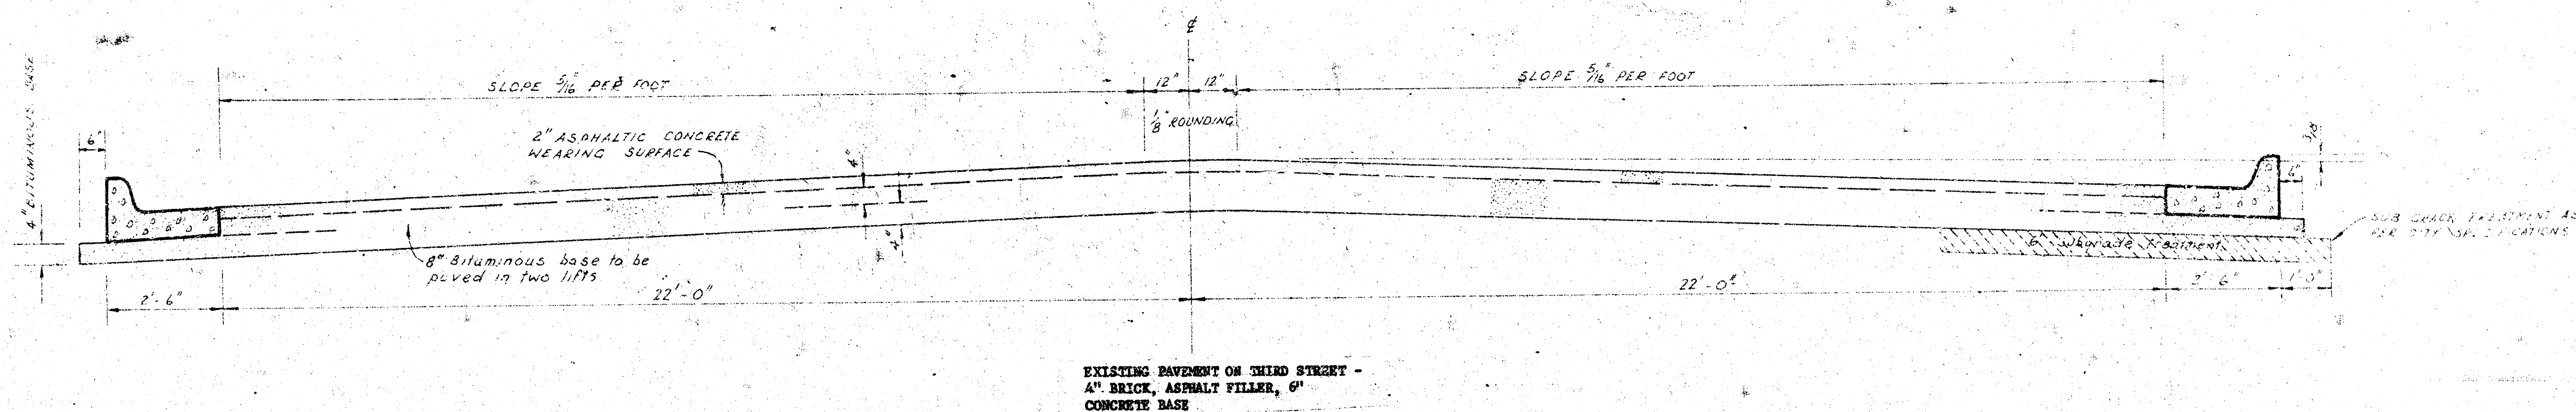


TYPICAL SECTION

48' ASPHALTIC CONCRETE PAVEMENT WITH BITUMINOUS BASE

A TACK COAT OF EMULSIFIED ASPHALT SS 1H SHALL BE APPLIED AT AN APPROXIMATE RATE 0.05 GALLONS PER SQ. YD. BETWEEN LIFTS OF ASPHALTIC MATERIALS WHEN ORDERED BY THE ENGINEER. TACK COAT WILL NOT BE PAID FOR DIRECTLY AND SHALL BE CONSIDERED AS SUBSIDIARY TO PRICE BID FOR ASPHALTIC PAVEMENT. BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC ELECTRONIC CONTROLS FOR CROWN AND GRADE. CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF 1' WITH JOINTS IN PRECEDING LIFTS AND SUCH THAT A JOINT WILL BE CONSTRUCTED ON THE PAVEMENT CENTERLINE IN THE TOP LIFT.


DETAIL OF TRANSVERSE CONSTRUCTION JOINTS

TRANSVERSE CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN FLEXIBLE BASE PAVEMENTS AT LOCATIONS WHERE PAVEMENT TEMPORARILY ENDS TO FACILITATE FUTURE PAVEMENT CONSTRUCTION AS SHOWN BY DETAIL. THE COST OF CONSTRUCTING THE TRANSVERSE CONSTRUCTION JOINTS SHALL NOT BE MEASURED OR PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE BID PRICE FOR SQUARE YARDS OF ASPHALTIC CONCRETE PAVEMENT.

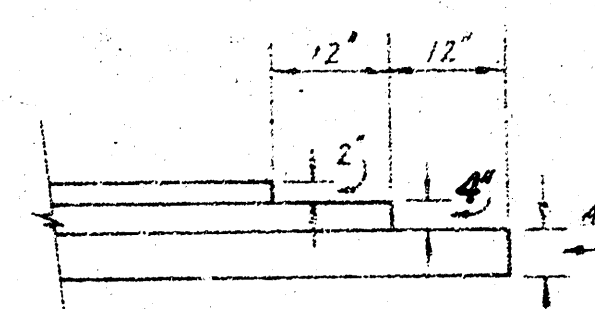


The A.C. pavement between the comb. curb & gutter be paid as sq. yds. 10" A.C. pavement (8" Bituminous Ba. The Bituminous Base under the comb curb & gutter sh be paid as sq. yds. 4" Bituminous Base.

COMBINED CURB & GUTTER

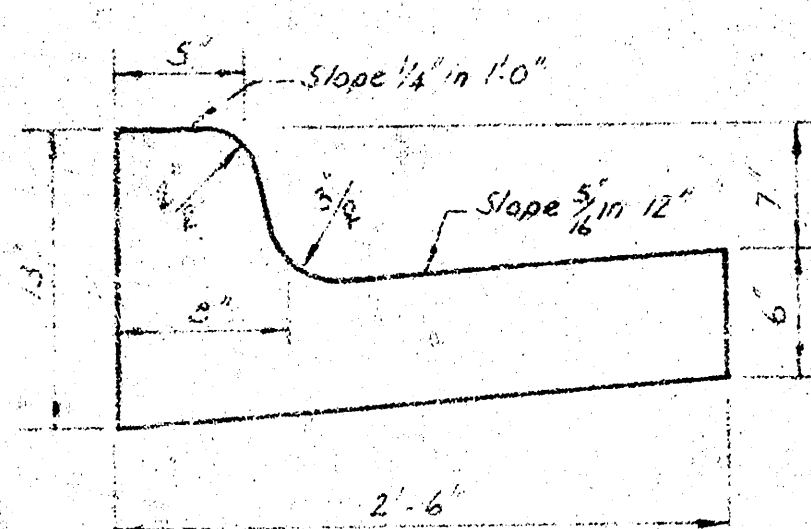

ROLL TYPE CURB & GUTTER

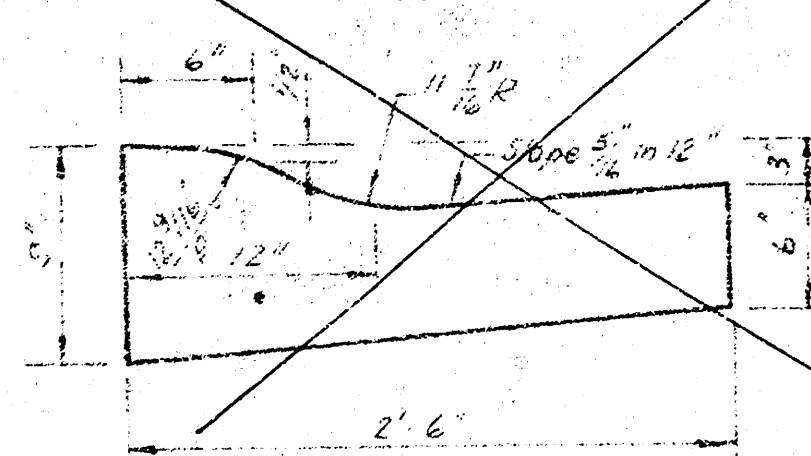

CITY OF WICHITA, K

DEPARTMENT of PUBLIC WORKS

Division

R. W. LINN

CITY EA


DATE

Proj No. W1

1
4

Survey: 1900
Plan: 2101
Exc: checked

B.M. 114.31 N.E. Corner Concrete Base R.R. Signal S.W.
Corner 3RD and WICHITA.
B.M. 112.71 "a" cut on back of walk on the No. Line
of Third Street 5' E. of E. Line of Main Street.

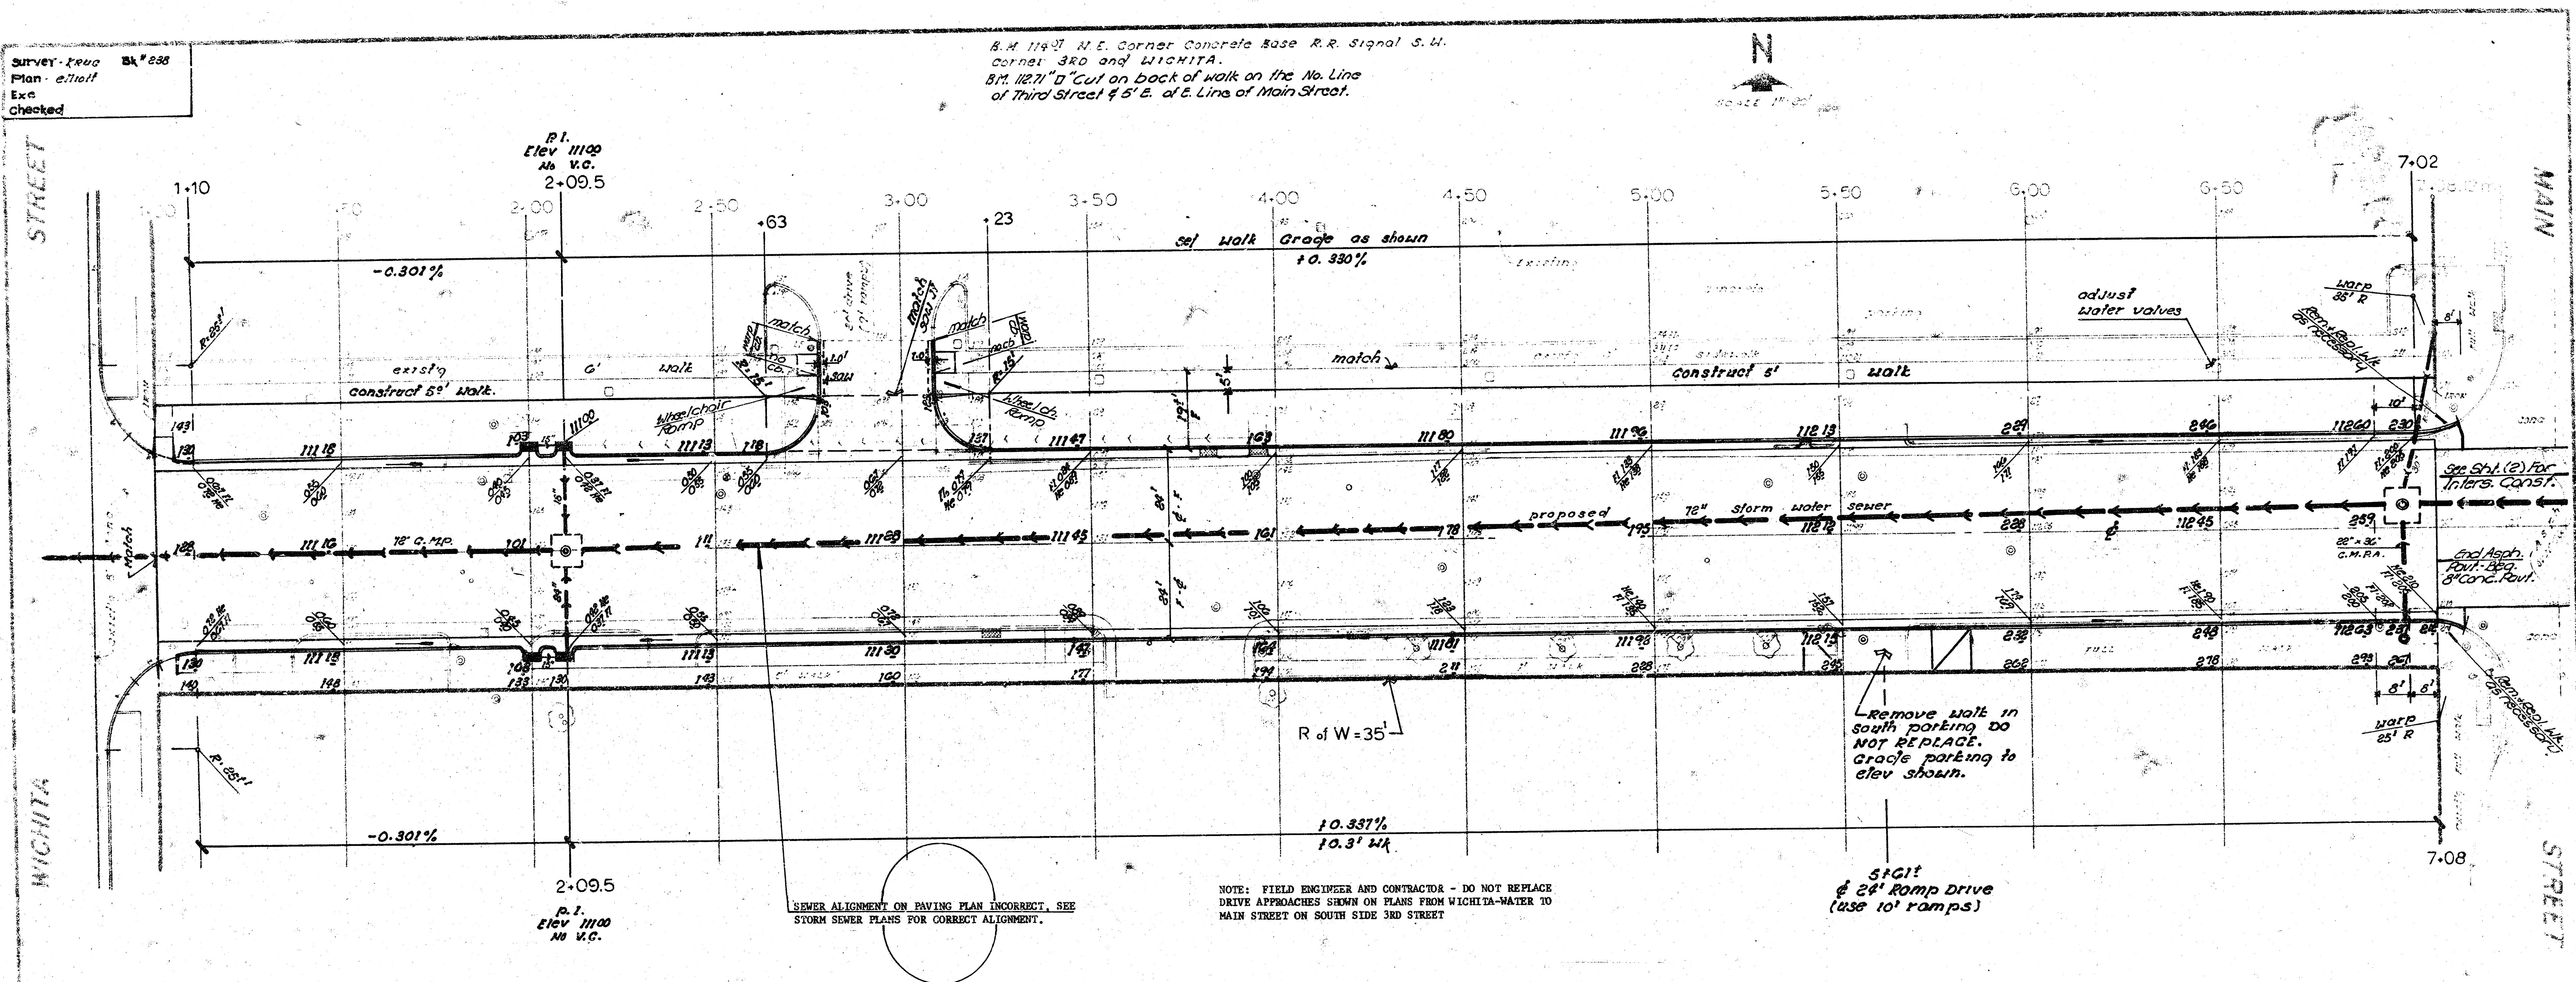

"WHEEL CHAIR RAMPS"
The construction of wheel chair ramps at intersections is to be bid as 5' Wheelchair Ramp.

CAUTION
UNDERGROUND UTILITIES
Please check for G & E or other utilities before excavating.

SUB-GRADE
TYPE OF SUB-GRADE TREATMENT SHALL BE DETERMINED BY THE FIELD ENGINEER. SUB-GRADE TREATMENT MAY CONSIST OF LIME TREATMENT, CEMENT TREATMENT, SUB-GRADE MODIFICATION, OR ANY COMBINATION OF THESE.

NOTE TO FIELD ENGINEER & CONTRACTOR
Grade parking and clear right-of-way for proposed sidewalk. Compact fill in sidewalk area. TO BE CONSTRUCTED BY "OTHERS".

NOTE TO CONTRACTOR: ALL USEABLE EXCAVATED MATERIAL TO REMAIN ON PROJECT.

"EARTHWORK"	
excavation	comp. fill
250.1 cu yds	38.2 cu yds
110% 25.0	110% 3.8
275.1 cu yds	42.0 cu yds

NOTE: trees to be removed marked thus. Except that any tree marked for removal which in the opinion of the engineer can be saved, shall be spared.

3RD STREET
E.L. WICHITA ST. TO W.L. MAIN
CITY OF WICHITA, KAN.
(49' B-B) 2" asph conc wearing si
8" bituminous base by comb cb
R W LINN CITY ENGINE

Date: _____ Proj. No. WNK5014:

2/3

FILMED FROM THE BEST AVAILABLE COPY

