


30TH ST. NO.
W.L. ST. FRANCIS TO A LINE 344.5' EAST OF W.L. ST. FRANCIS
472-76-245-81087-000-000-001
CITY OF WICHITA, KS.
R.W. BRUGGEMAN—DIR. ENGINEERING




Scale:
1" = 150'

UNPLATTED

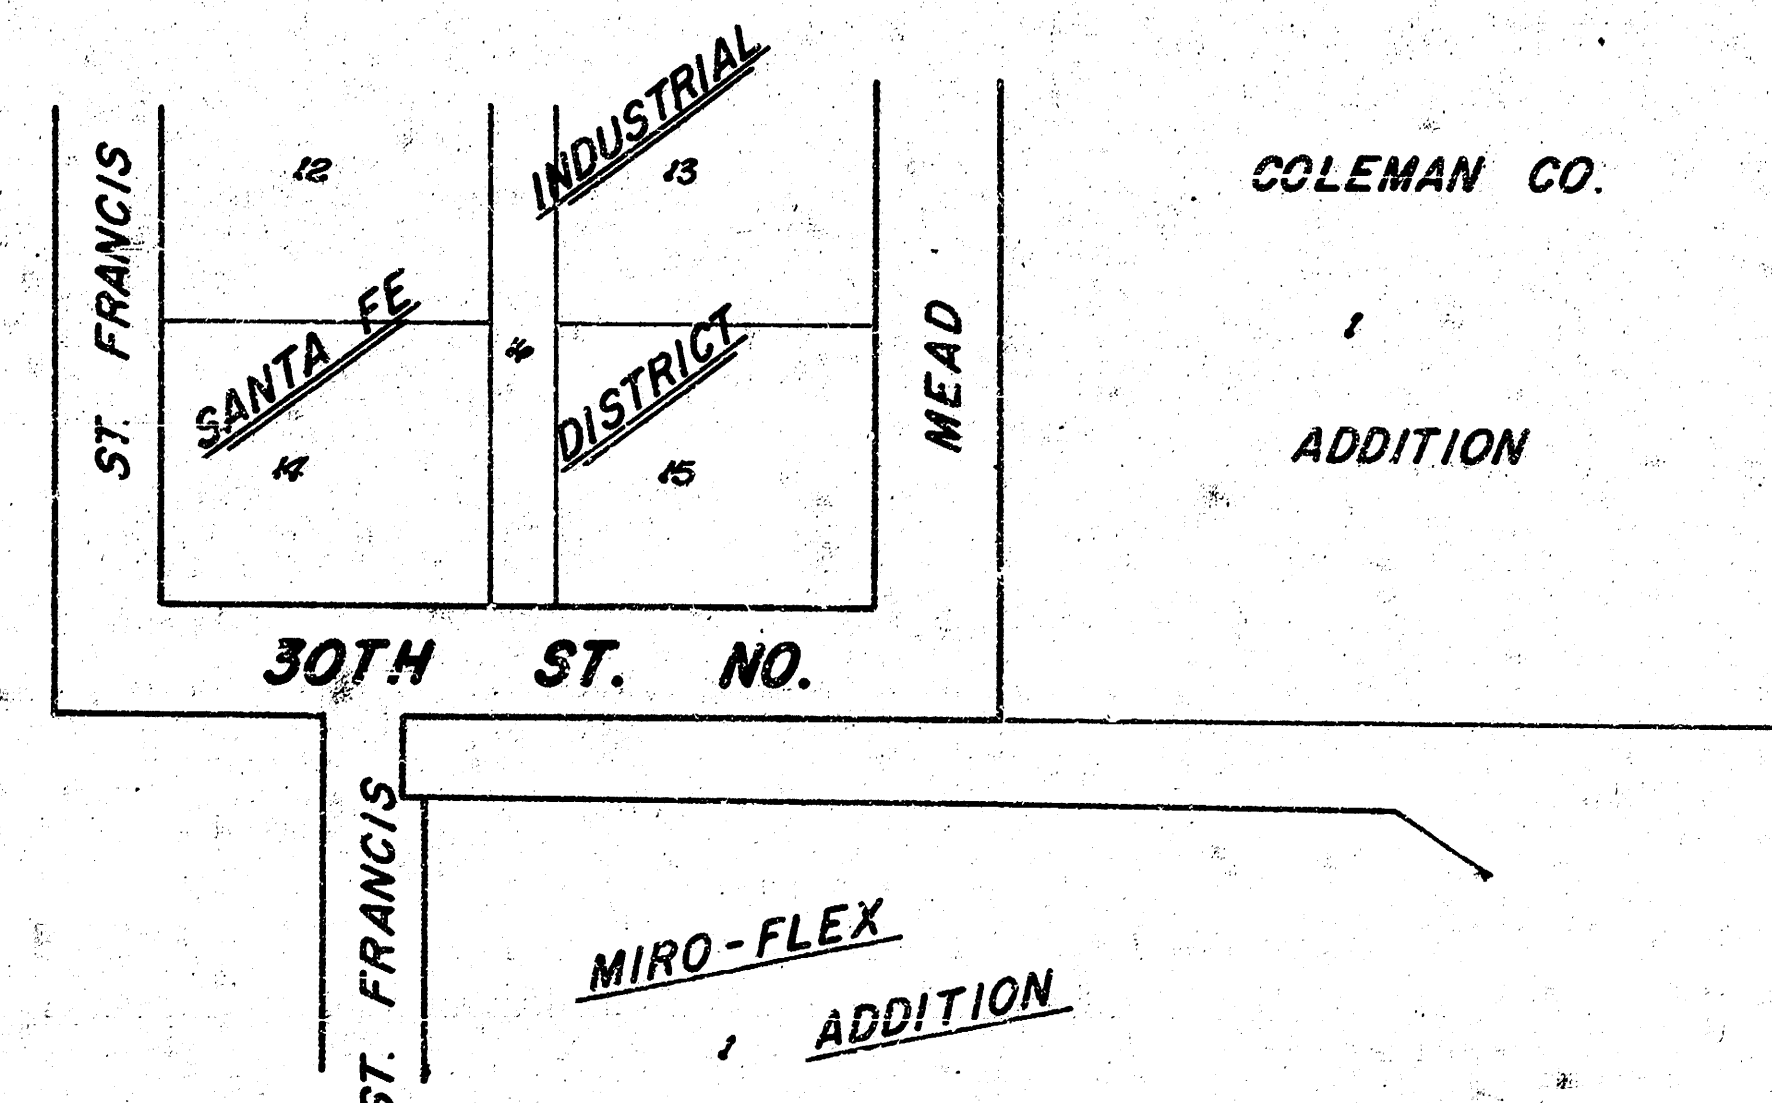

NOTE:

THE CONTRACTOR SHALL BE RESPONSIBLE FOR PRESERVING PROPERTY IRONS. THE CONTRACTOR SHALL BE REQUIRED TO RE-ESTABLISH ANY PROPERTY IRONS WHICH ARE DAMAGED OR DESTROYED BY HIS CONSTRUCTION OPERATIONS. SUCH IRONS SHALL BE RE-ESTABLISHED BY A LICENSED LAND SURVEYOR OR A LICENSED PROFESSIONAL ENGINEER IN ACCORDANCE WITH STATE LAWS.

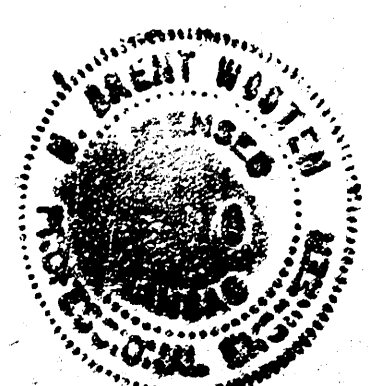

Date


1/4

BAUGHMAN COMPANY, P.A.
SURVEYING & ENGINEERING
316/262-7271 • 330 LAURA • WICHITA, KANSAS 67211

FILMED FROM THE BEST
AVAILABLE COPY

Plan - Birmingham Co. - 1/2" = 1' 6" Survey - 84-8

30 TH ST. 17' to 66' corner Beehive Inlets S.E. Cor. Column Aiding.
 30 TH ST. 17' to 66' corner Beehive Inlets S.E. Cor. Column Aiding.

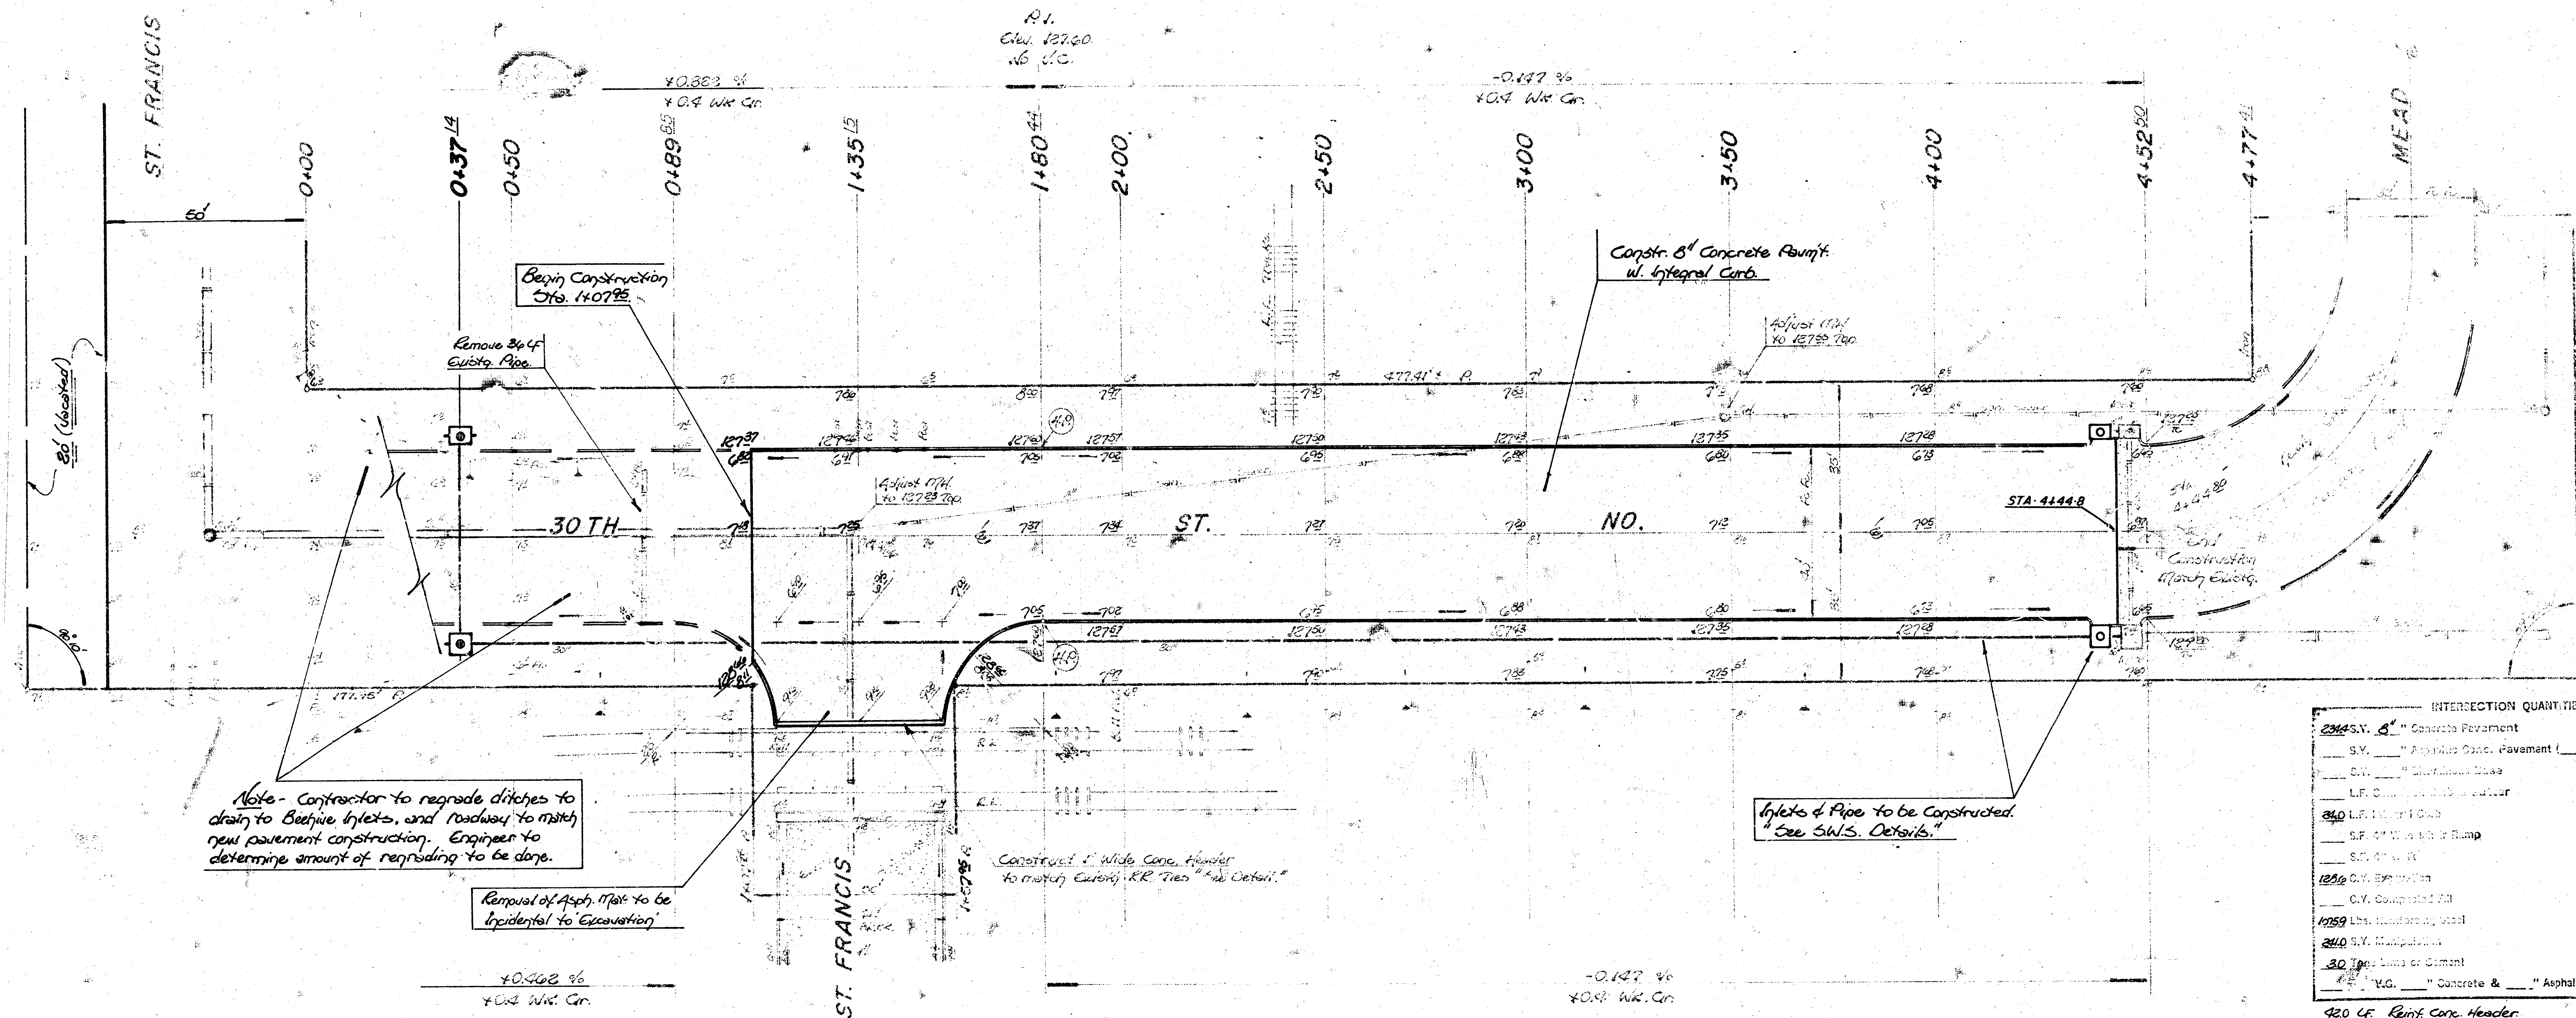


Note - Contractor to regrade ditches to drain to Beehive Inlets, and roadway to match new pavement construction. Engineer to determine amount of regrading to be done.

Removal of Asph. Mat to be incidental to excavation

Construct 1' wide concrete shoulder to match existing RR ties "See Detail"

Inlets & Pipe to be constructed. See S.W.S. Details.

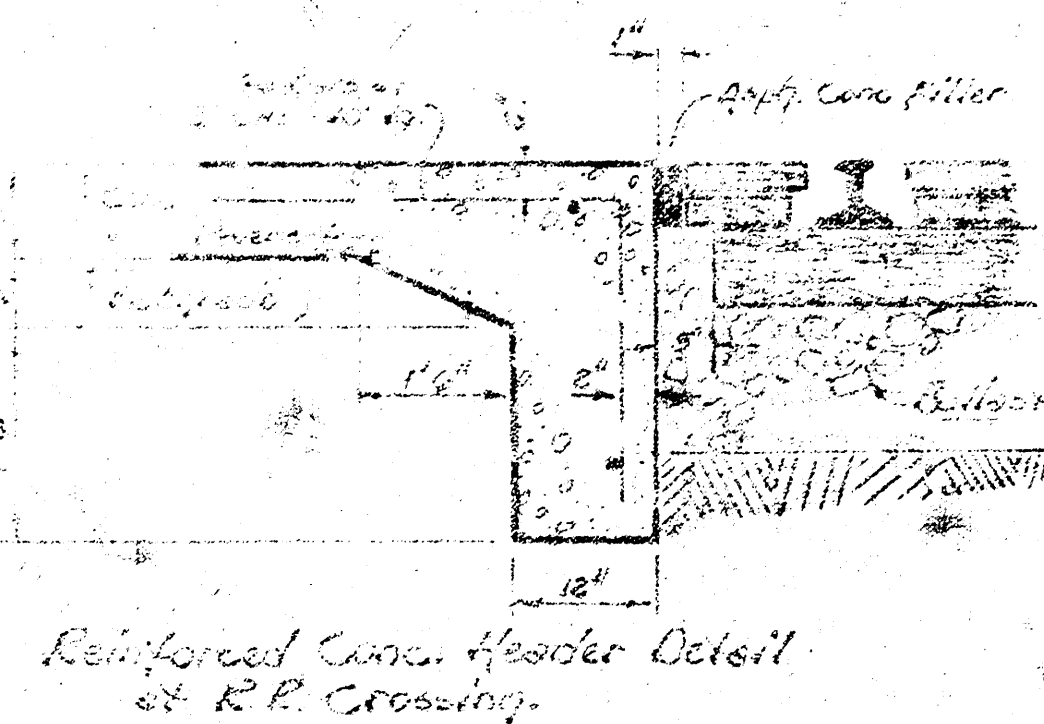

Reinforced Concrete Header Detail at R.R. Crossing

Property		City	
Excavation	790.4 CY	Excavation	125.6 CY
Comp. Fill	0	Comp. Fill	0
Total	790.4 CY	Total	125.6 CY
Manipulation = 1521.1 SY		Manipulation = 251.2 SY	

Note -
 Regrading Existing Sand Street & ditches to match the new construction & the new beehive inlets to be done at Engineer's direction. Cost of Regrading to be incidental to Project. Pavement grades are to match proposed plan grades for construction of Mead. Engineer to verify these grades in field and make adjustments if necessary.

INTERSECTION QUANTITIES	
254 S.V.	Concrete Pavement
S.V.	Asphalt Concrete Pavement (1" Bituminous Base)
S.V.	Asphalt Concrete Base
L.F.	Concrete Curb & Gutter
340 L.F.	Integral Curb
S.F.	1/2" Wide 18" High Ramp
S.F.	1/2" Wide 18" High Ramp
1250 C.V.	Excavation
C.V.	Compacted Fill
1250 Lbs.	Reinforcing Steel
250 S.V.	Manipulation
30	Lineal Feet of Concrete
12	Yd. Concrete & 1" Asphalt Concrete Base
120 L.F.	Reinforced Concrete Header

30TH ST. NO.
 472-75-245-81087-000-000-001

FILMED FROM THE BEST AVAILABLE COPY

