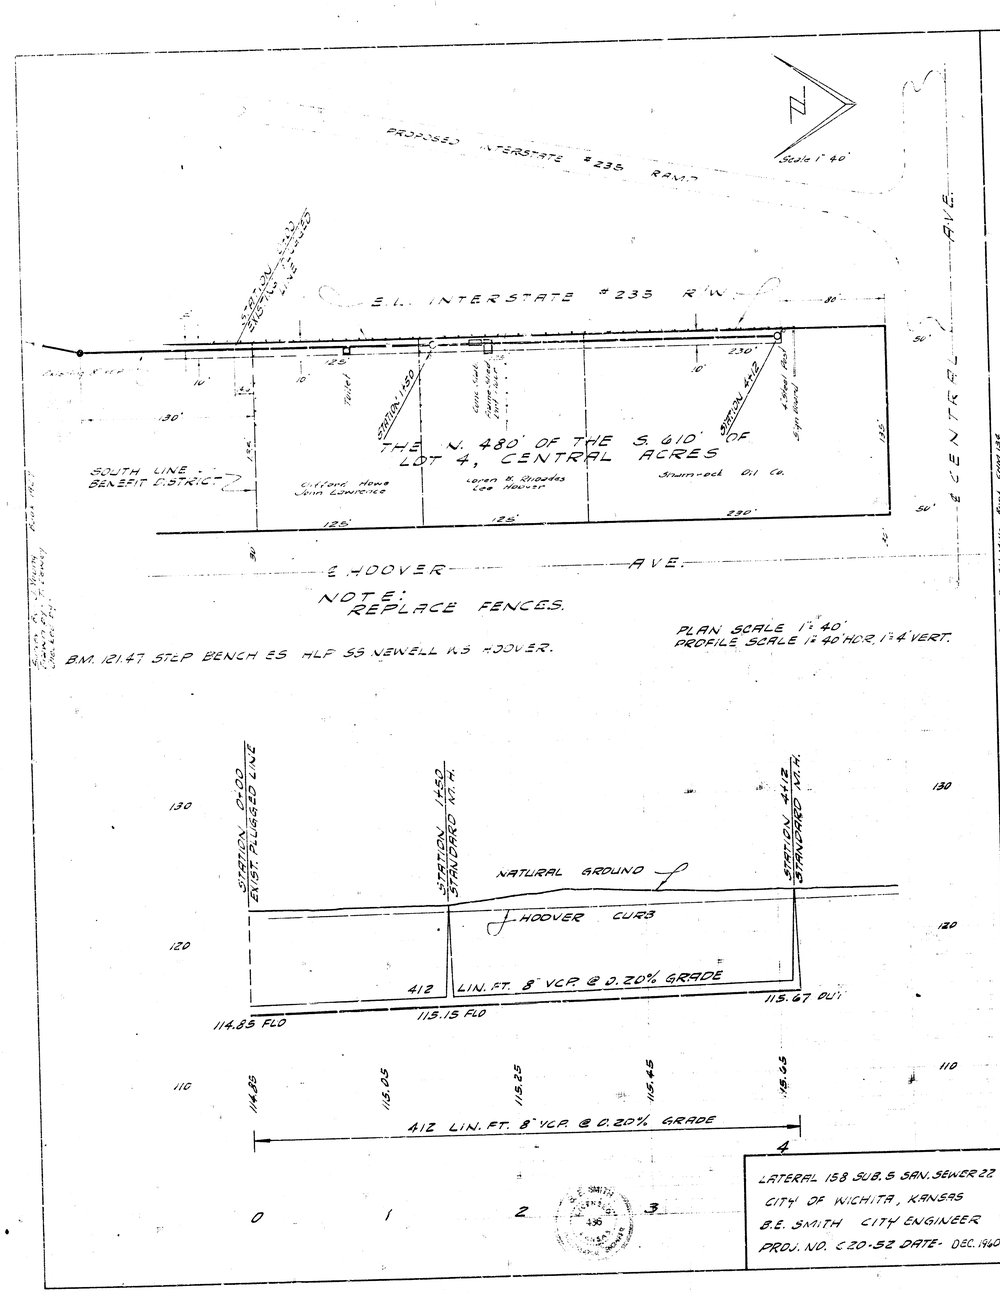
PROPOSED INTERSTATE #235 RAMP
Scale 1" 40'
E.L. INTERSTATE #235 R/W
STATION 0+00 EXISTING R/W
STATION 1+50
STATION 4+12
THE N. 480' OF THE S. 610' OF LOT 4, CENTRAL ACRES
SOUTH LINE BENEFIT DISTRICT
Clifford Howe
John Lonchine
Loren H. Rhoades
Lee Hoover
Shannock Oil Co.
E. HOOVER AVE.
E. CENTRAL AVE.
NOTE: REPLACE FENCES.
B.M. 121.47 STEP BENCH ES HLF SS NEWELL KS HOOVER.
PLAN SCALE 1" = 40'
PROFILE SCALE 1" = 40' HOR. 1" = 4' VERT.
STATION 0+00 EXIST. PLUGGED LINE
STATION 1+50 STANDARD N.T.H.
STATION 4+12 STANDARD V.T.H.
NATURAL GROUND
HOOVER CURB
412 LIN. FT. 8" VCP. @ 0.20% GRADE
114.85 FLO
115.15 FLO
115.67 OUT
412 LIN. FT. 8" VCP. @ 0.20% GRADE
LATERAL 158 SUB. 3 SAN. SEWER 22
CITY OF WICHITA, KANSAS
B.E. SMITH CITY ENGINEER
PROJ. NO. C20-52 DATE- DEC. 1960

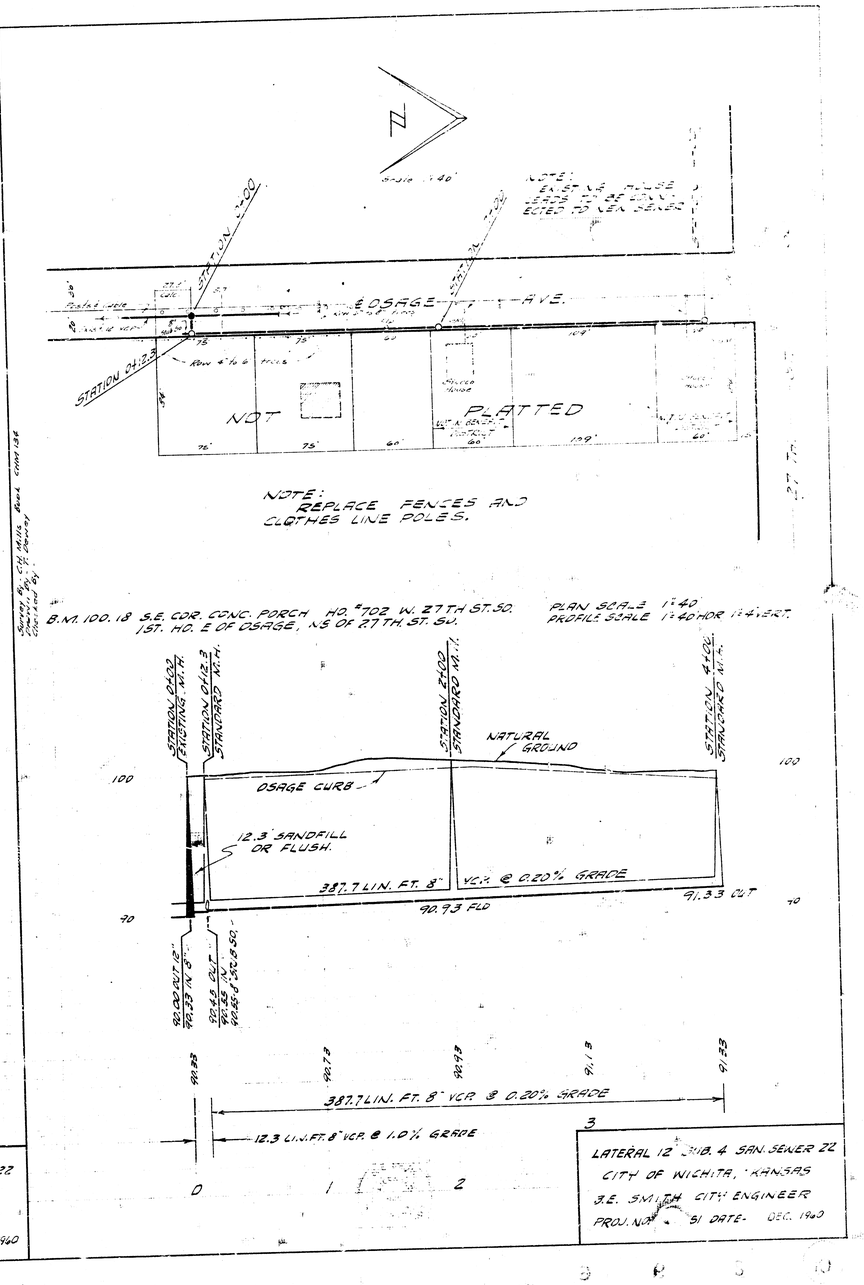
Scale 1" 40'
NOTE: EXISTING FENCE TO BE REMOVED AND REPLACED TO VEN DENCE
STATION 0+00
STATION 4+12
OSAGE AVE.
STATION 0+12.3
NOT PLATTED
NOTE: REPLACE FENCES AND CLOTHES LINE POLES.
B.M. 100.18 S.E. COR. CONC. PORCH NO. #702 W. 27TH ST. SO. 1ST. HO. E OF OSAGE, N.S OF 27TH. ST. SO.
PLAN SCALE 1" = 40'
PROFILE SCALE 1" = 40' HOR 1" = 4' VERT.
STATION 0+00 EXISTING N.T.H.
STATION 0+12.3 STANDARD N.T.H.
STATION 2+00 STANDARD V.T.H.
STATION 4+00 STANDARD V.T.H.
NATURAL GROUND
OSAGE CURB
12.3' SANDFILL OR FLUSH.
387.7 LIN. FT. 8" VC.P. @ 0.20% GRADE
90.73 FLO
91.33 OUT
387.7 LIN. FT. 8" VCP. @ 0.20% GRADE
12.3 LIN. FT. 8" VCP. @ 1.0% GRADE
LATERAL 12 SUB. 4 SAN. SEWER 22
CITY OF WICHITA, KANSAS
B.E. SMITH CITY ENGINEER
PROJ. NO. 51 DATE- DEC. 1960