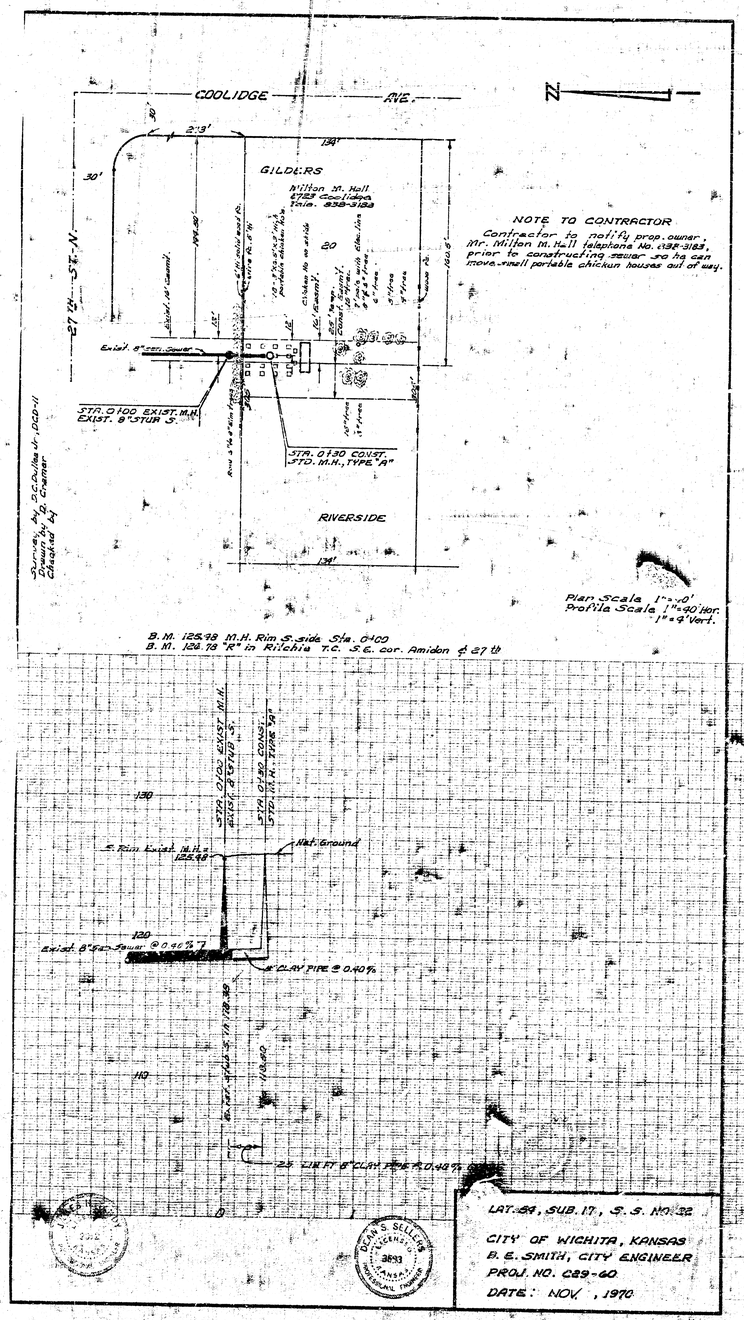
COOLIDGE AVE.
27TH ST. N.
GILDERS
Milton M. Hall
6723 Coolidge
Tele. 838-3183
NOTE TO CONTRACTOR
Contractor to notify prop. owner, Mr. Milton M. Hall telephone No. 838-3183, prior to constructing sewer so he can move small portable chicken houses out of way.
Exist. 8" sec. Sewer
STA. 0+00 EXIST. M.H.
EXIST. 8" STUB S.
STA. 0+30 CONST.
STD. M.H., TYPE "A"
RIVERSIDE
Plan Scale 1"=40'
Profile Scale 1"=40' Hor.
1"=4' Vert.
B.M. 125.98 M.H. Rim S. side Sta. 0+00
B.M. 126.78 "R" in Ritchie T.C. S.E. cor. Amidon & 27th
Net Ground
Exist. 8" Sec. Sewer @ 0.40%
8" CLAY PIPE @ 0.40%
25 LIN FT 8" CLAY PIPE @ 0.40%
LAT. 84, SUB. 17, S. S. NO. 22
CITY OF WICHITA, KANSAS
B. E. SMITH, CITY ENGINEER
PROJ. NO. C29-60
DATE: NOV. , 1970