


LEGEND:



The geology shown is the best information available to the Kansas Department of Transportation.

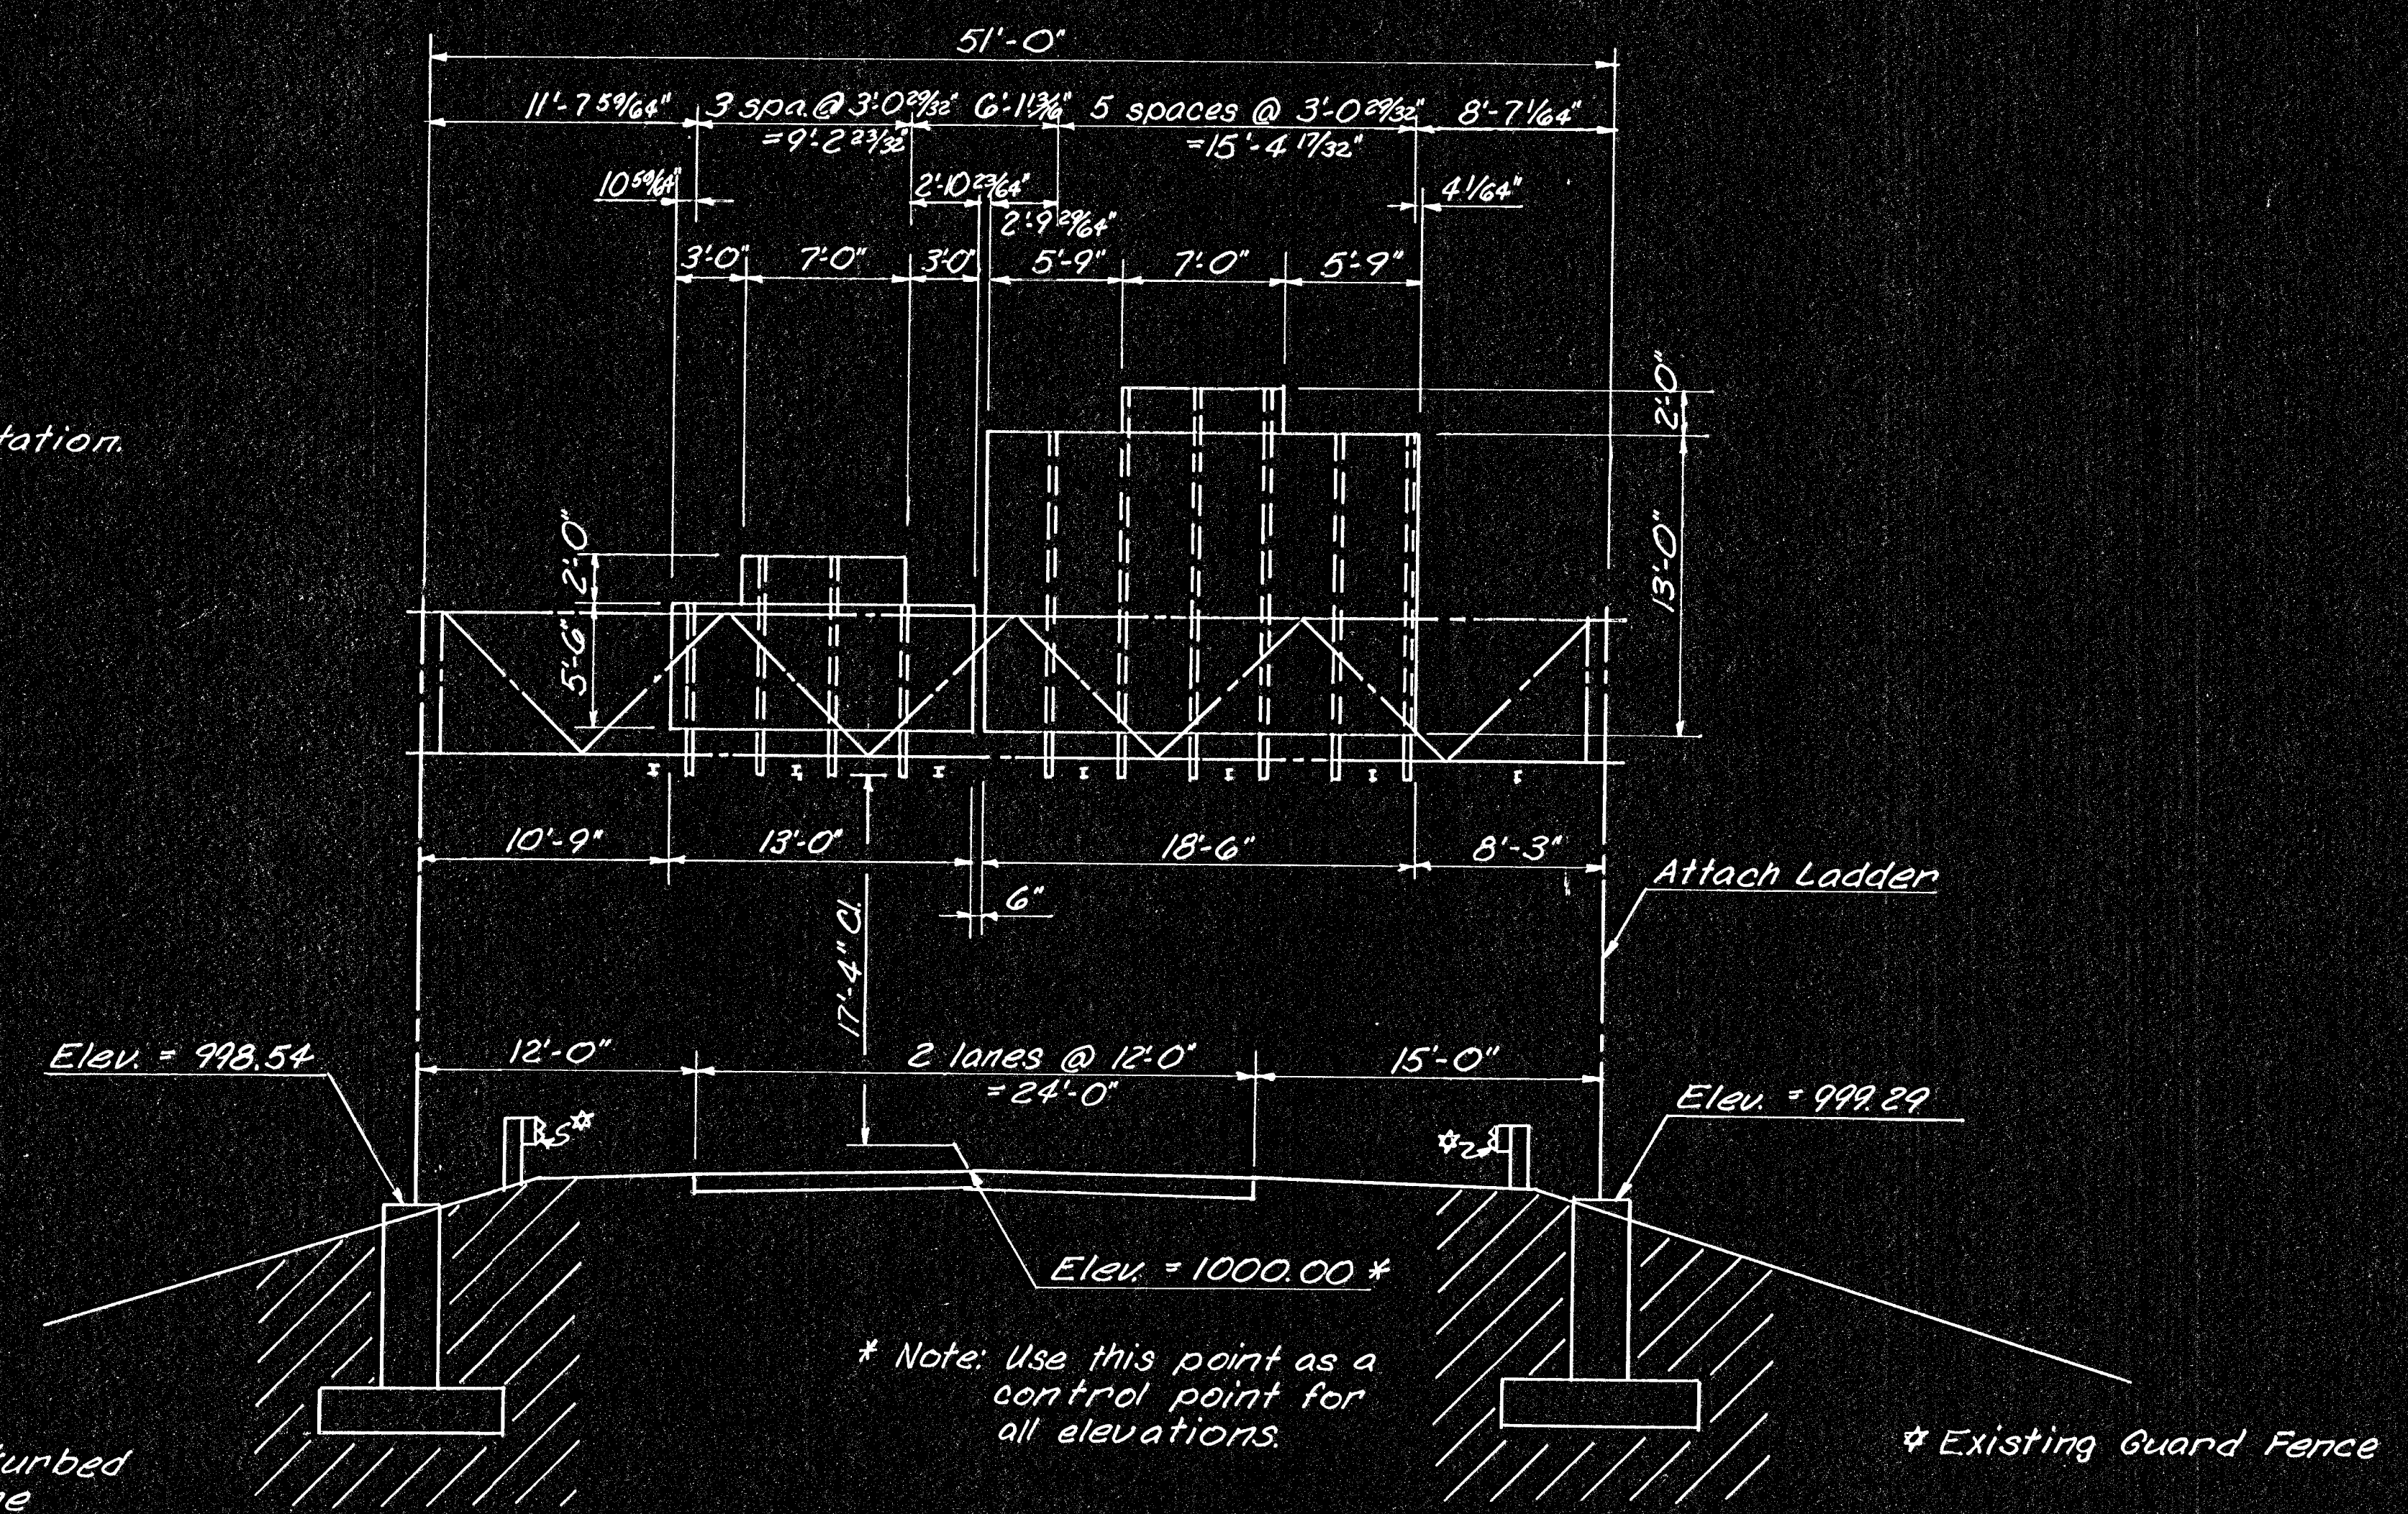


Note: Any guard fence disturbed by the construction of the footings, shall be restored to its original condition at the Contractor's expense.

* Note: Use this point as a control point for all elevations.

* Existing Guard Fence

ELEVATION

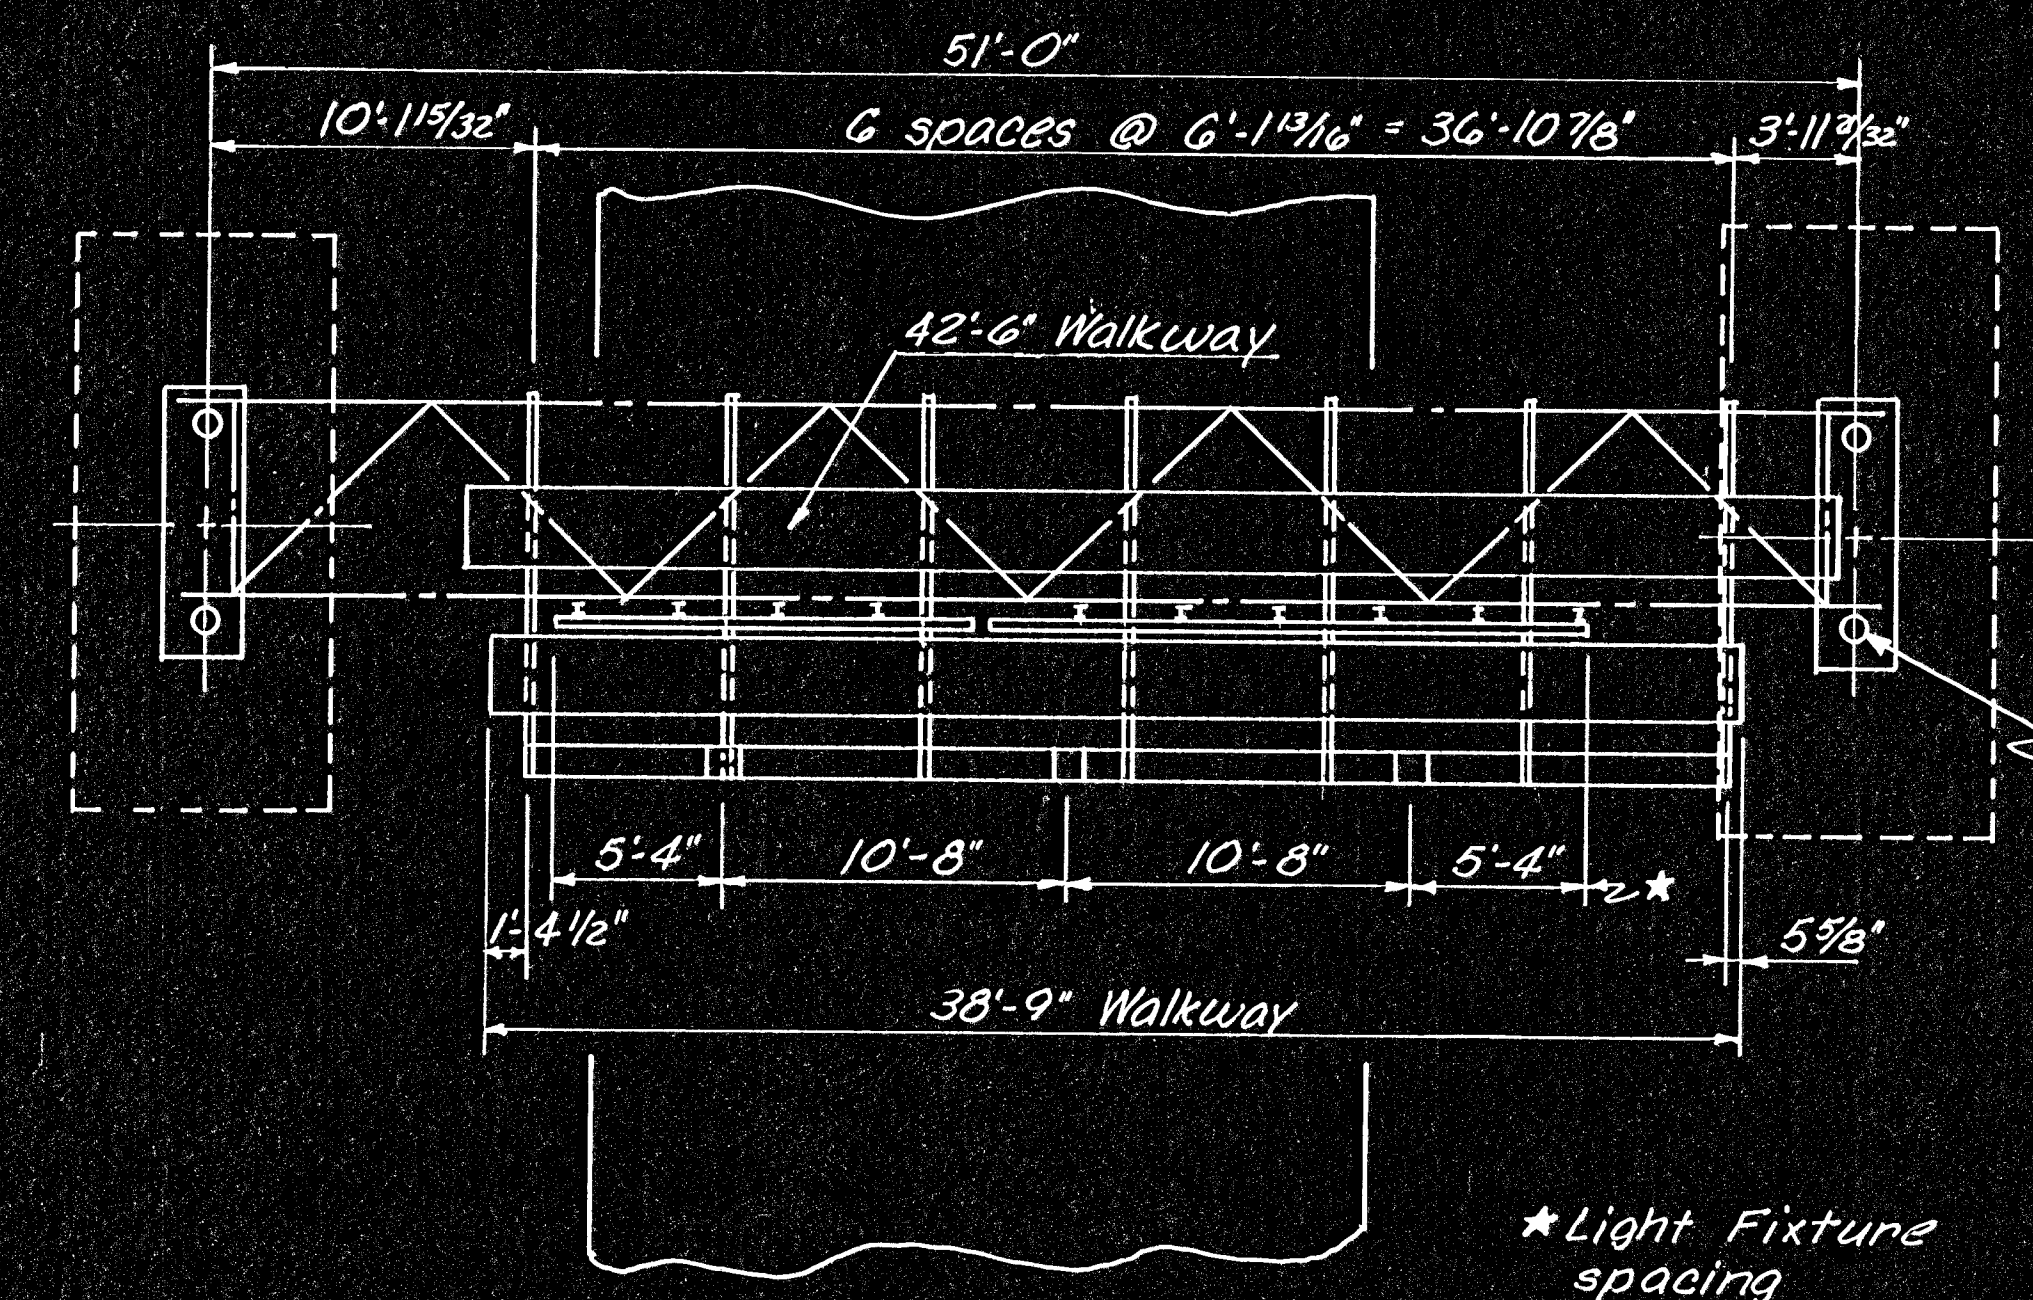

4 Footings = Sta. 471+00

Install 3/4" 90° conduit bend for underground circuiting. See "Standard Footing" sheet. Power for sign lighting shall be extended from light standard left of Sta. 469+85. Structure shall be grounded.

* Light Fixture spacing

PLAN

Scale: 1"=6'-0"

DETAILS ALUMINUM ALTERNATE				
Truss	Member 1 wall thickness .250"			
	Member 2 wall thickness .226"			
End Supports	N=3	X=10'-3/4"	S=6'-11/16"	Camber = 1/16"
	Member 1 wall thickness .307"			
	Member 2 wall thickness .237"			
	Left	N=3	S=6'-0"	L=26'-0 1/2"
Footings	Right	N=3	S=5'-9"	L=25'-3 1/2"
	Left Type D Right Type E			

3				
2				
1				
NO.	DATE	REVISIONS	BY	APP'D
KANSAS DEPARTMENT OF TRANSPORTATION				
S.B. I235		STA. 471+00		
CONSTRUCTION LAYOUT AND GEOLOGY				
OVERHEAD SIGN STRUCTURE				
ALUMINUM ALTERNATE				
PROJ. NO. (BC)96-87-K044-1(28) SEDGWICK CO.				
SHEET NO. 107 OF 143	SCALE	APP'D		
DESIGNED LES	DETAILED LES	QUANTITIES	TRACED	
DESIGN CK. DRE	DETAIL CK. DRE	QUAN. CK.	TRACE CK.	