


NOTE TO CONTRACTOR
 Pipe is to be installed @ Sta. 0100 to 0196 by open ditch method with tracks removed during hours which will not disturb train traffic. The contractor shall give proper notice to the R.R. Co. to provide flagmen, etc. while the crossing is being made. The expense of removing & replacing tracks and all other charges made by the R.R. Co. will be paid by the contractor. R.R. charges, cost of encasement and rebar steel, and all other extra cost of crossing shall be included in the lump sum bid of encasement.
 6 sack paving mix is to be used for encasement concrete.

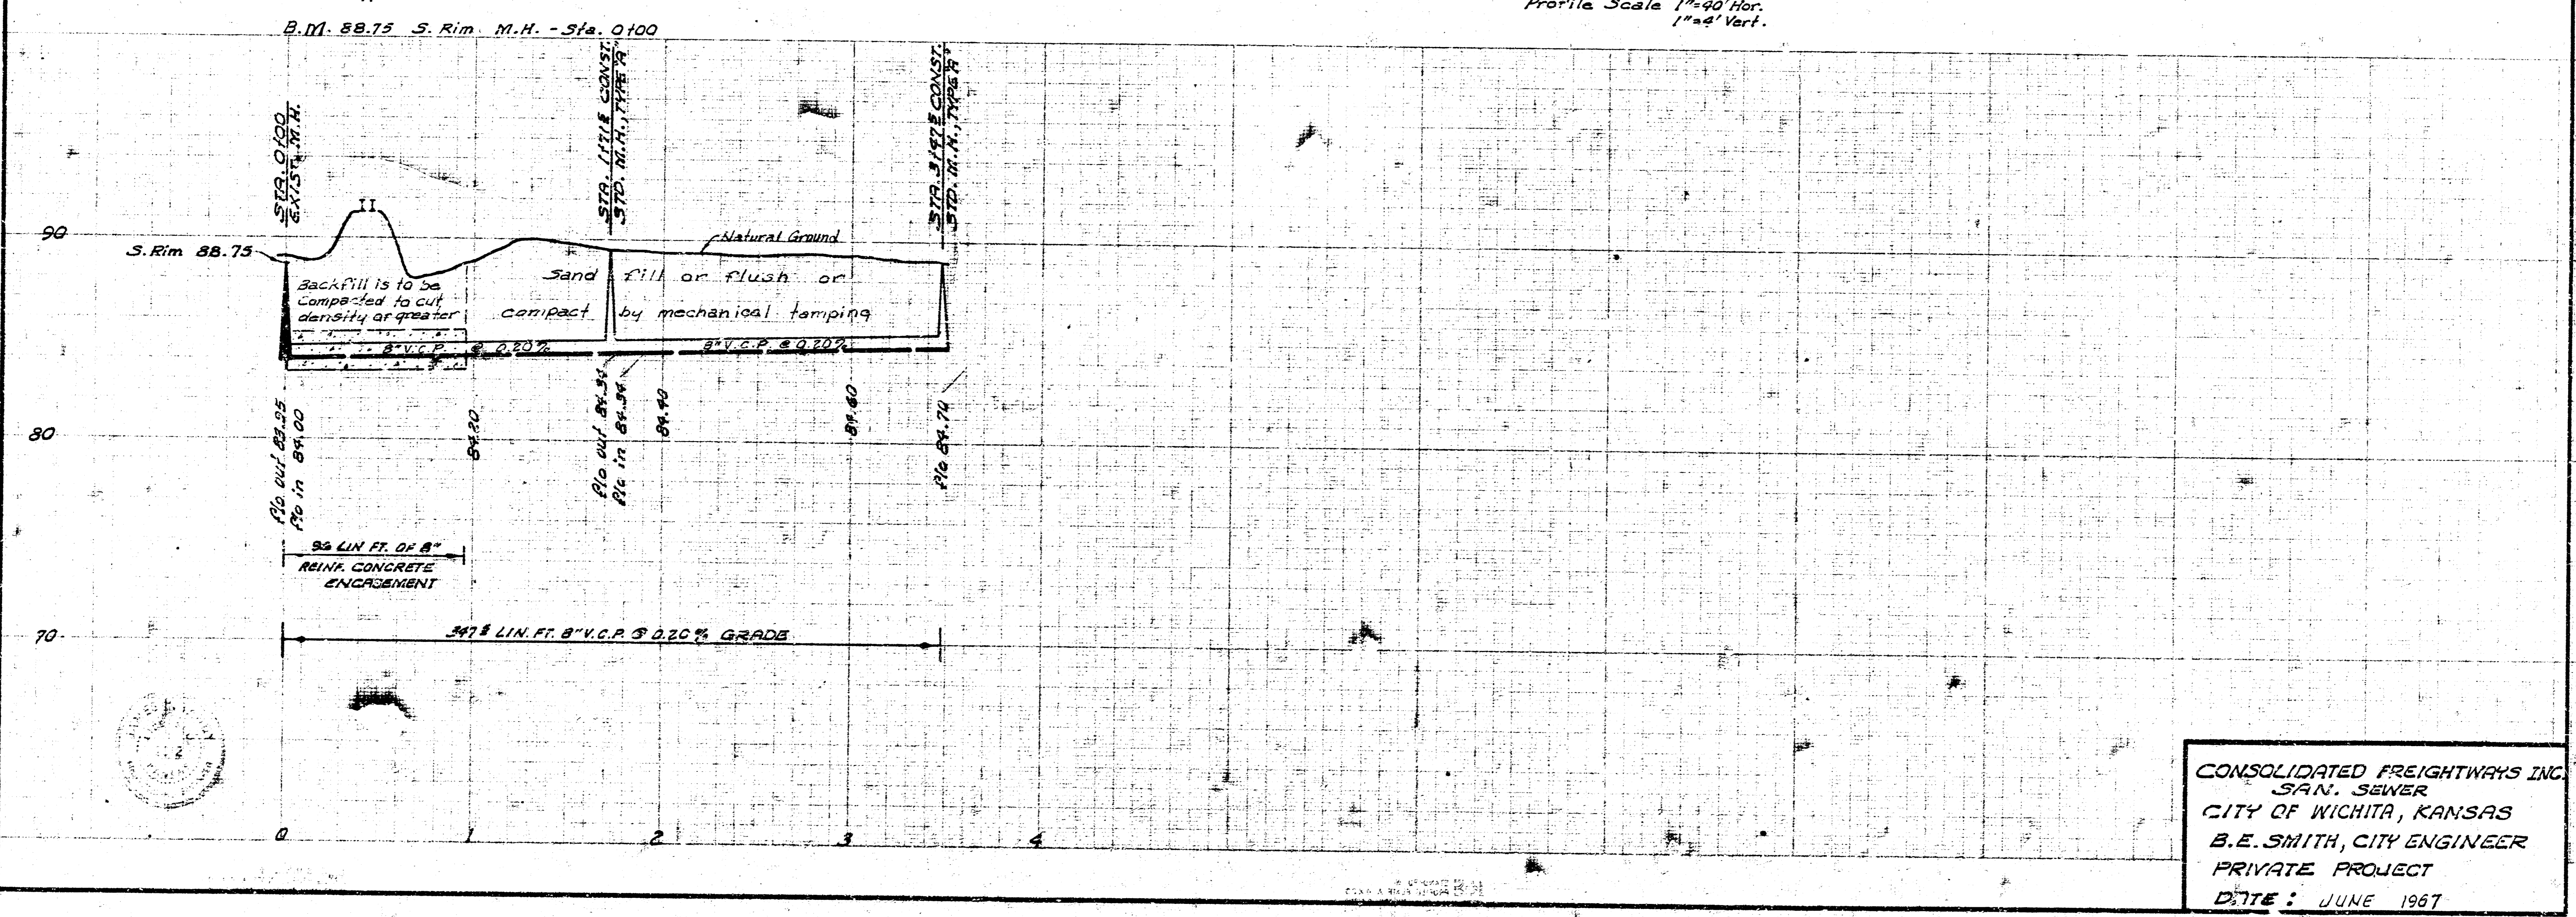

CONSOLIDATED FREIGHTWAYS INC.
 SAN. SEWER
 CITY OF WICHITA, KANSAS
 B.E. SMITH, CITY ENGINEER
 PRIVATE PROJECT
 DATE: JUNE 1967