B.M. 157.08 "⌶" cut N.W. cor. conc. base Meadowlark Theatre Sign So. Side narry Approx. 100 ft. W. of Terrace Drive.

B.M. 157.07 "□" cut Top W. cb Menlo Dr. @ N.L. Terrace Dr.

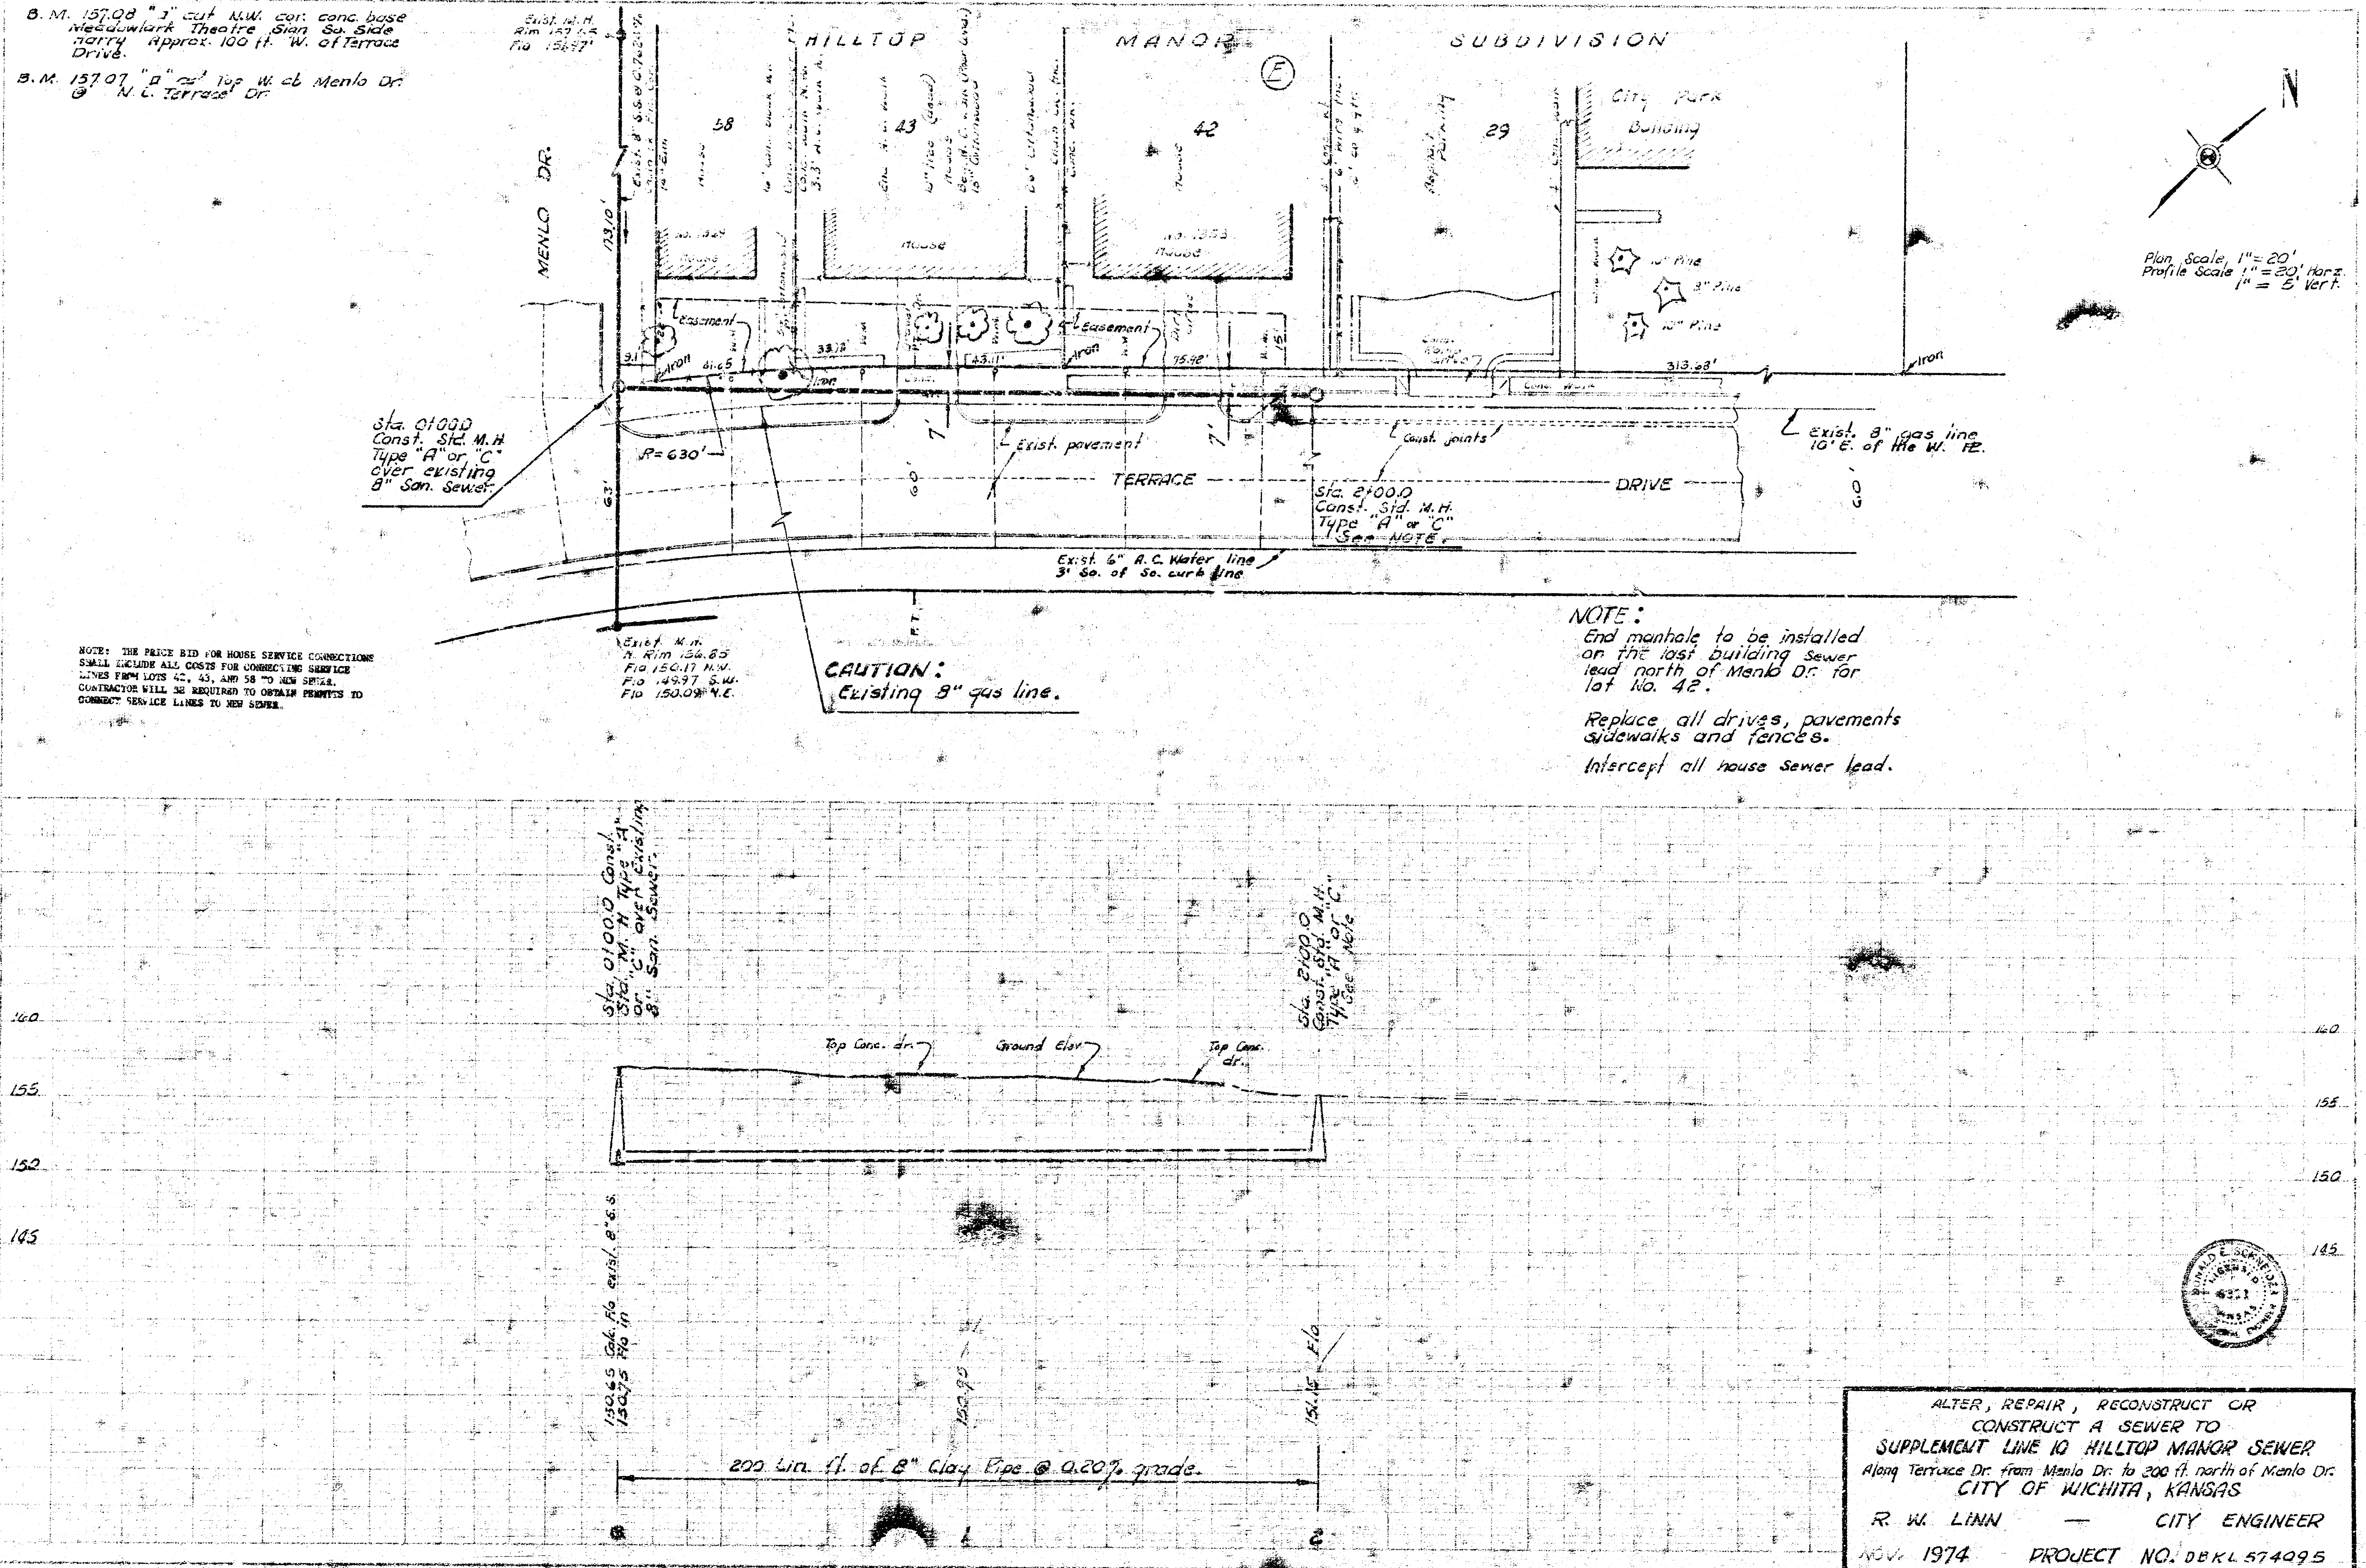

Exist. M.H.
Rim 157.65
Flo 150.87'
Exist. 8" S.S. @ 0.76%
HILLTOP MANOR SUBDIVISION
E
58
43
42
29
City Park Building
MENLO DR.
133.10'
House
Easement
Iron
9.1'
41.65
33.12'
43.11'
75.98'
313.68'
Const. joints
Exist. pavement
7'
60'
63'
TERRACE
DRIVE
R=630'
Sta. 0+00.0
Const. Std. M.H.
Type "A" or "C"
over existing
8" San. Sewer.
Sta. 2+00.0
Const. Std. M.H.
Type "A" or "C"
See NOTE.
Exist. 8" gas line
10' E. of the W. P.L.
10" Pine
8" Pine
10" Pine
Exist. 6" A.C. Water line
3' So. of So. curb line
Exist. M.H.
Rim 156.85
Flo 150.17 N.W.
Flo 149.97 S.W.
Flo 150.09 N.E.
N
Sta. 0+00.0 Const. Std. M.H. Type "A" or "C" over existing 8" San. Sewer.
Sta. 2+00.0 Const. Std. M.H. Type "A" or "C" See Note
Top Conc. dr.
Ground Elev.
Top Conc. dr.
160
155
150
145
130.65 Calc. Flo exist. 8" S.S.
130.75 Flo in
150.95
151.15 Flo
200 Lin. ft. of 8" Clay Pipe @ 0.20% grade.
0
2

Plan Scale 1" = 20'
Profile Scale 1" = 20' Horz.
1" = 5' Vert.

NOTE: THE PRICE BID FOR HOUSE SERVICE CONNECTIONS SHALL INCLUDE ALL COSTS FOR CONNECTING SERVICE LINES FROM LOTS 42, 43, AND 58 TO NEW SEWER. CONTRACTOR WILL BE REQUIRED TO OBTAIN PERMITS TO CONNECT SERVICE LINES TO NEW SEWER.

CAUTION:
Existing 8" gas line.

NOTE:
End manhole to be installed on the last building sewer lead north of Menlo Dr. for lot No. 42.

Replace all drives, pavements sidewalks and fences.

Intercept all house sewer lead.

ALTER, REPAIR, RECONSTRUCT OR
CONSTRUCT A SEWER TO
SUPPLEMENT LINE 10 HILLTOP MANOR SEWER
Along Terrace Dr. from Menlo Dr. to 200 ft. north of Menlo Dr.
CITY OF WICHITA, KANSAS
R. W. LINN — CITY ENGINEER
NOV. 1974 PROJECT NO. DBKL 574095

14 7 2 (55)