

**BILL OF MATERIALS (For Information Only)**

ITEM	QUANTITY	UNIT
Traffic Signal Pole Steel w/Mastarm (Std.)	4	Each
Concrete Controller Pad	1	Each
Concrete Footing - Pole	4	Each
Service Box - 36" Dia.	4	Each
Ground Rod and Clamp	5	Each
Conduit Clamp	As Needed	Each
Pedestrian Signal Lamp L.E.D. (12" Combination)	16	Each
12" L.E.D. Unit	56	Each
Back Plate for Signal Head (Type A)	8	Each
Back Plate for Signal Head (Type I)	4	Each
Entrance Head	1	Each
Circuit Breaker and Box	1	Each
Traffic Signal Head - 12" (Type A) w/Mounting Bracket	12	Each
Traffic Signal Head - 12" (Type I) w/Mounting Bracket	4	Each
Pedestrian Signal - 16" w/Countdown (Type K) w/Mounting Bracket	8	Each
Pedestrian Pushbutton w/Sign	8	Each
Clary Filtering Backup Power Supply (SP 2000 SR)	1	Each
Pad Mounted Cabinet and Controller System - Type 2070 (See Note)	1	Each
Lead-In Wire No. 6 Awg 1/c (Type THHN)	264	L.F.
Multi-Conductor Cable No. 14 Awg 2/c	55	L.F.
Multi-Conductor Cable No. 14 Awg 5/c	802	L.F.
Multi-Conductor Cable No. 14 Awg 7/c	1483	L.F.
Stranded No. 8 Awg 1/c (Type THHN)(Ground)	897	L.F.
Conduit 1" (RG)	35	L.F.
Conduit 2" (RG)	55	L.F.
Conduit 3" (RG)	490	L.F.
Video Detection Camera and Mounting Hardware (Riser Bracket)	4	Each
Video Detection Processor Unit (Iteris Vantage or Apr'vd Equal)	4	Each
Video Power Cable No. 16 Awg 3/c	590	L.F.
Video Cable 75 ohm Coaxial (Belden #8281)	590	L.F.
TV Monitor	1	Each
TOMAR FSEMIT-120	1	Each
TOMAR STROBECOM-2090 ST	1	Each
TOMAR 3080 PROCESSOR CARD	1	Each
Street Name Signs	4	Each
Left Turn Sign (R10-10) w/Mounting Hardware	4	Each

**EQUIPMENT SPECIFICATIONS 2070 CONTROLLER**

Controller Units: The 2070 controllers supplied shall meet the requirements

- A. 1 The 2070 controllers shall have a 19" EIA rack mountable chassis (mated to the 170 cabinet). Controllers shall be EAGLE or ECONOLITE.
- 2 2070-1B CPU module with RJ-45 Ethernet port.
- 3 connector.
- 4 2070-3B 8X40 front panel with LCD display.
- 5 2070-4A 10 amp power supply.
- 6 2070-7A asynchronous serial communications module (RS-232).
- 7 Any unused slot position shall have a cover plate.

**B. Conflict Monitors:**

The Conflict Monitors supplied shall be 2010 ECL conflict monitors.

**C. 1-Loop-back cable for 2070-2A Field I/O (Type 170, 104 pin and 37 pin connector).**

**D. 1-Loop-back cable for 2070-7A port.**

- E. Ground Surrestor's with #10 Copper w/No more than two Camera's per ground.
- F. Cabinet to include pull out shelf.

Note: The Contractor shall supply and install all necessary material and equipment for the installation of the Traffic Signal System shown in these plans.

- \* Contractor to install Pre-Emption Equipment in Fire Station to include installing Conduit thru Wall for Emmitter.

TRAFFIC SIGNAL POLE SUMMARY							
POLE NO.	STATION	TYPE	ARM LENGTH	SIGNALS ON ARM	X1 X2 X3	OTHER EQUIPMENT ON ARM	SIGNALS ON POLE
1	49+30.62, 47.6' Lt.	B	46'	3-E	11.5' 11'	1-D, 1-G, 1-H, 1-I	1-E, 2-F
2	50+63.73, 47.9' Lt.	B	66'	3-E	11.5' 11'	1-D, 1-G, 1-H, 1-I	1-E, 2-F
3	49+25.67, 42.6' Rt.	B	41'	3-E	11.5' 11'	1-D, 1-G, 1-H, 1-I	1-E, 2-F
4	50+63.75, 44.8' Rt.	B	61'	3-E	11.5' 11'	1-D, 1-G, 1-H, 1-I	1-E, 2-F


- A - Joint Use Steel Pole with Mast Arm
- B - Standard Steel Pole with Mast Arm
- C - Pedestal Pole (10' Aluminum)
- D - Left Turn Sign (R10-10)
- E - Traffic Signal
- F - Pedestrian Signal with Push Button
- G - Street Name Sign
- H - Video Detection Camera
- I - Wind Damper

STREET NAME SIGN SUMMARY	
LEGEND	60" x 18"
135th St W	2
21st St N	2
TOTAL	4

Letters shall be 12" Caps, 9" Lower Case Highway B Font. Block Numbers to be included 2100N, 2200N (135TH), 13500W, 13600W (21ST)

**LEGEND**

- Steel Traffic Signal Pole (Std. Pole)
- ➔ Traffic Signal Indication (Type A) w/Backplate
- ➔ Mast Arm Suspended Traffic Signal
- 📷 Video Detection Camera
- 📦 Service Box
- 📦 Controller
- ⏏ Pedestrian Indication
- Rigid Galvanized Conduit (RGC)
- Ⓜ Meter Box and Power Disconnect
- ⏏ Overhead Street Name Sign
- ⏏ Overhead Sign R10-10 (Lt. Turn Signal)
- ⏏ Wind Damper
- Ⓜ PP Power Pole

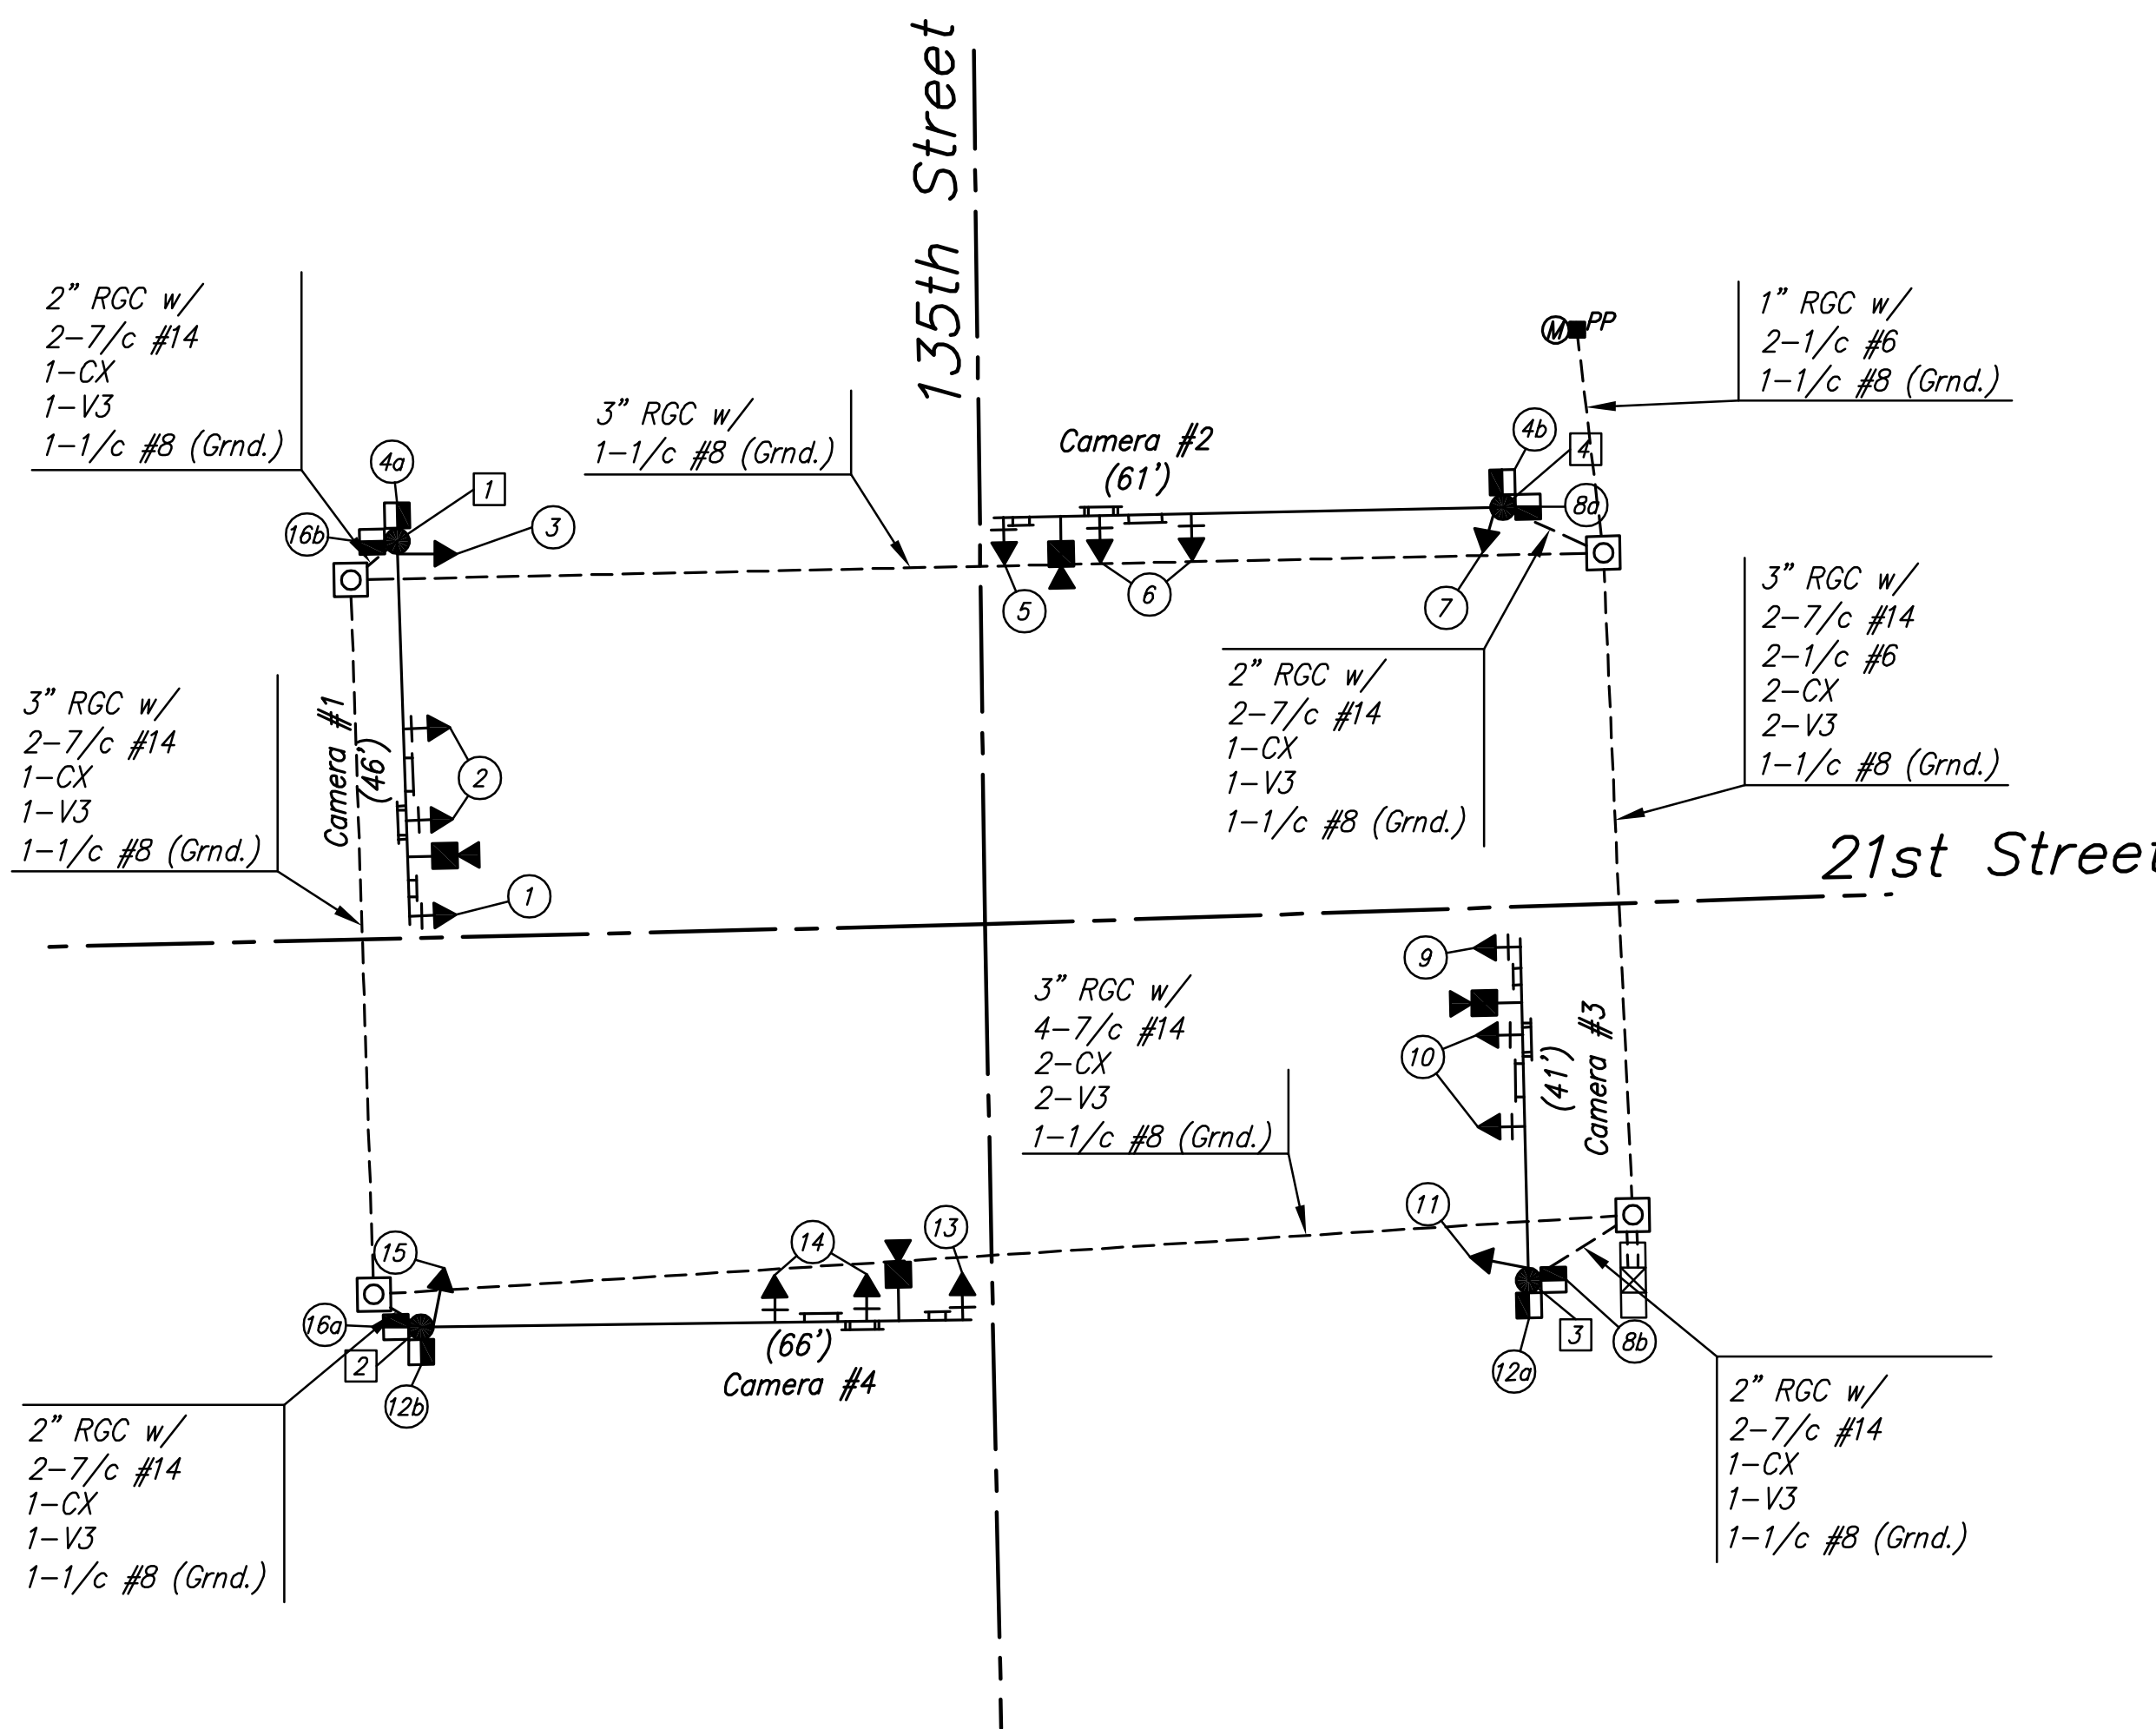

L.E.D. Signal Heads: All lenses in each signal head shall be a self-contained, sealed unit designed to fit a regular 12-inch traffic signal housing. It shall incorporate a minimum of 186 high reliability, high intensity LED indicators. The lens shall provide a light beam spread of 30 degrees on all sides of its center axis which shall be designed to provide a 5 to 7 degree downward angle.

The lens shall be made of UV stabilized plastic. The rear cover shall be of non-flammable material and the entire unit shall be totally sealed to preclude the entrance of water, dust or other contaminants.

The self-contained, regulated power supply shall allow the unit to operate over an input voltage range between 89 and 135 volts A.C. and shall be configured in at least 3 parallel circuits for reliability. Light output shall be comparable to that provided by a standard, 12 inch traffic signal lens illuminated by a 150 watt incandescent lamp. The red wave length shall be 630 to 660 nm.

The manufacturer shall warrant the unit against defects in workmanship and materials for a period of at least five years after date of shipment. This warranty shall be assigned to the maintenance agency.




**RECAPITULATION OF TRAFFIC SIGNAL QUANTITIES**

BID ITEM	QUANTITY	UNIT
TRAFFIC SIGNALIZATION	1	L.S.


TRAFFIC SIGNAL HEAD SUMMARY				
SIGNAL NO.	TYPE	SIZE	MOUNTING BRACKET	QUANTITY
1	I	5-12"	TYPE I	1
2	A	3-12"	TYPE I	2
3	A	3-12"	TYPE III	1
4a, 4b	K	2-12"	TYPE II	2
5	I	5-12"	TYPE I	1
6	A	3-12"	TYPE I	2
7	A	3-12"	TYPE III	1
8a, 8b	K	2-12"	TYPE II	2
9	I	5-12"	TYPE I	1
10	A	3-12"	TYPE I	2
11	A	3-12"	TYPE III	1
12a, 12b	K	2-12"	TYPE II	2
13	I	5-12"	TYPE I	1
14	A	3-12"	TYPE I	2
15	A	3-12"	TYPE III	1
16a, 16b	K	2-12"	TYPE II	2

All Signal Heads to be L.E.D.

\* All Poles, Mastarms and Cabinet shall be Powder Coated Black.

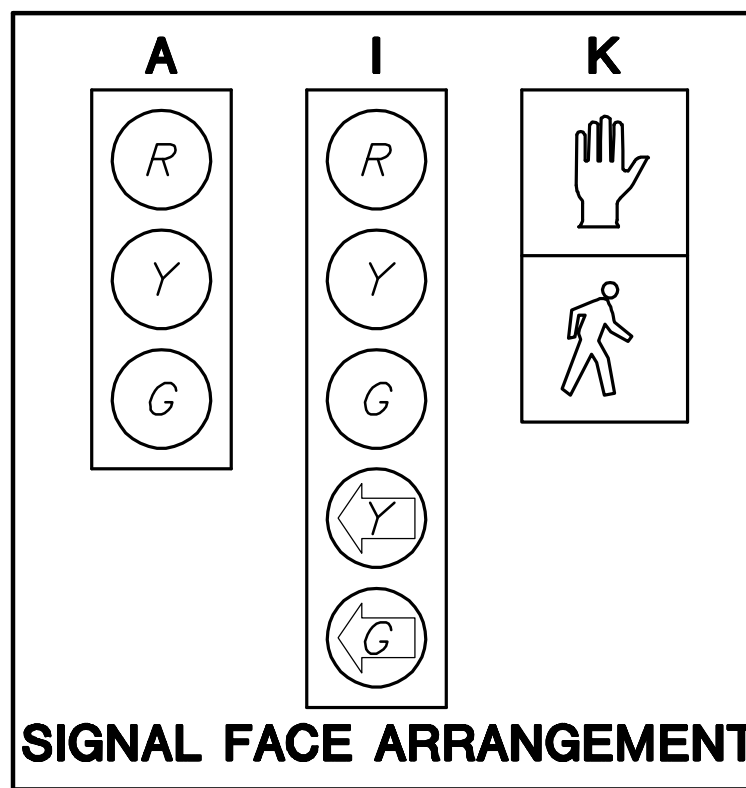


All lenses in each head shall be L.E.D. unit per note.

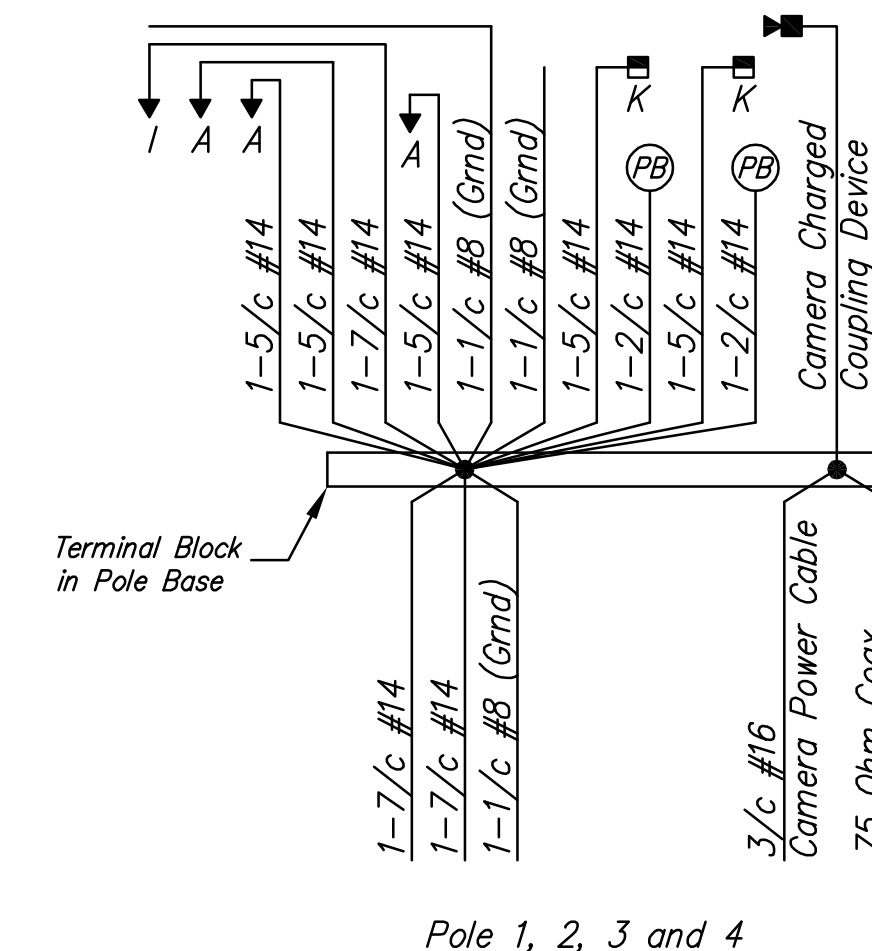

Pole 1, 2, 3 and 4

**MKEC**  
ENGINEERING  
CONSULTANTS, INC.  
411 N. WEBB ROAD  
WICHITA, K.S. 67206  
316-684-9600

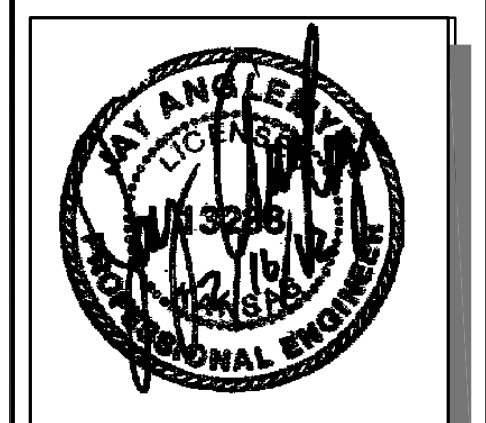

**STREET IMPROVEMENTS FOR**  
**135th Street West**  
from 13th Street to 21st Street North

**135th St. and 21st St. Traffic Signal Plan**  
SHEET TITLE  
MKEC PROJ #10265  
PROJECT NUMBER

JRA  
DESIGN BY  
JSB  
DRAWN BY  
JRA  
CHECKED BY

ISSUED  
February 2012  
REVISED  
Revised Bill of Materials, Notes.

SHEET NO.  
**135R of 231**

PLOTED: Friday, March 09, 2012 02:02PM

J:\Civil\10265\DWG\Signal\10265wire1a