



CONCRETE MEDIAN NOSE DETAIL

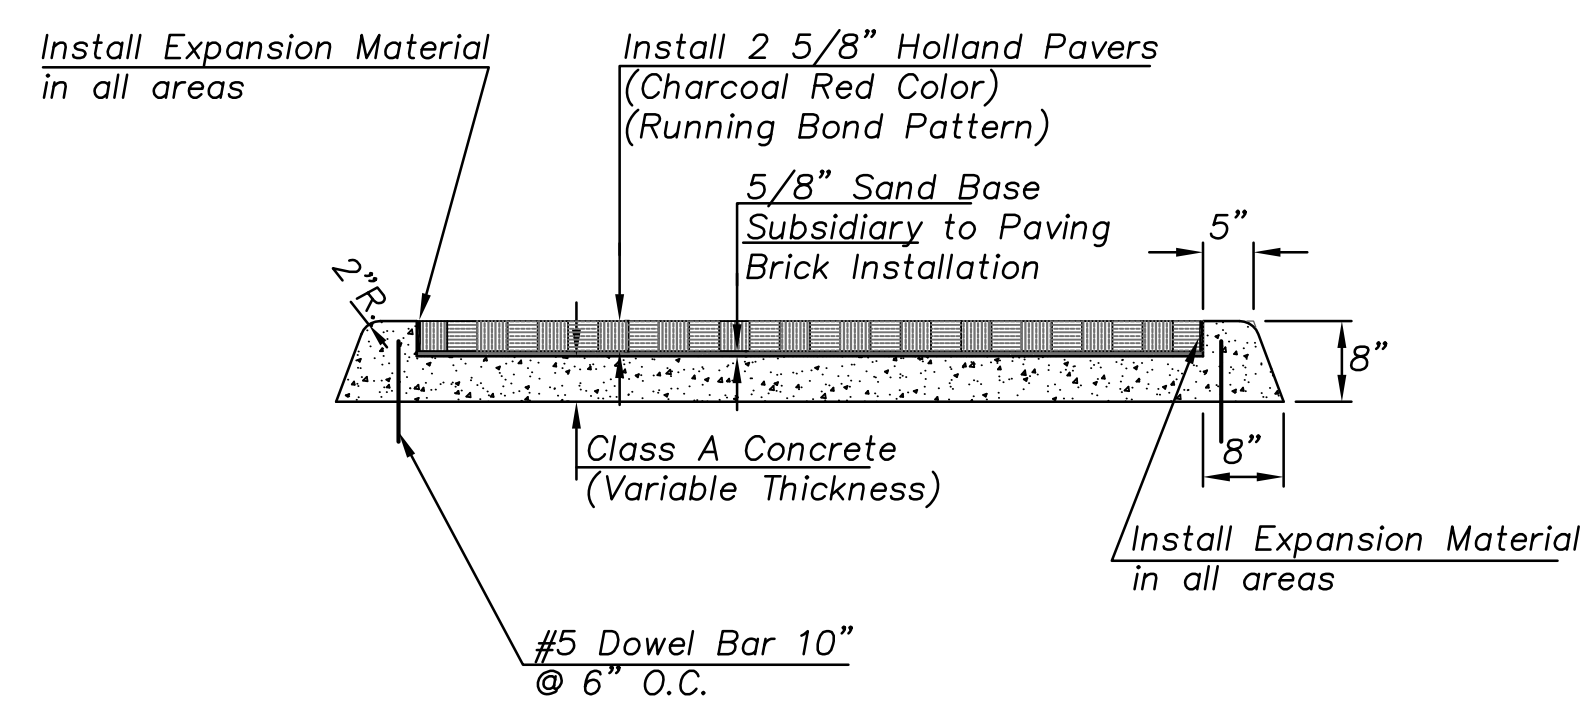

MEDIAN ISLAND DETAIL

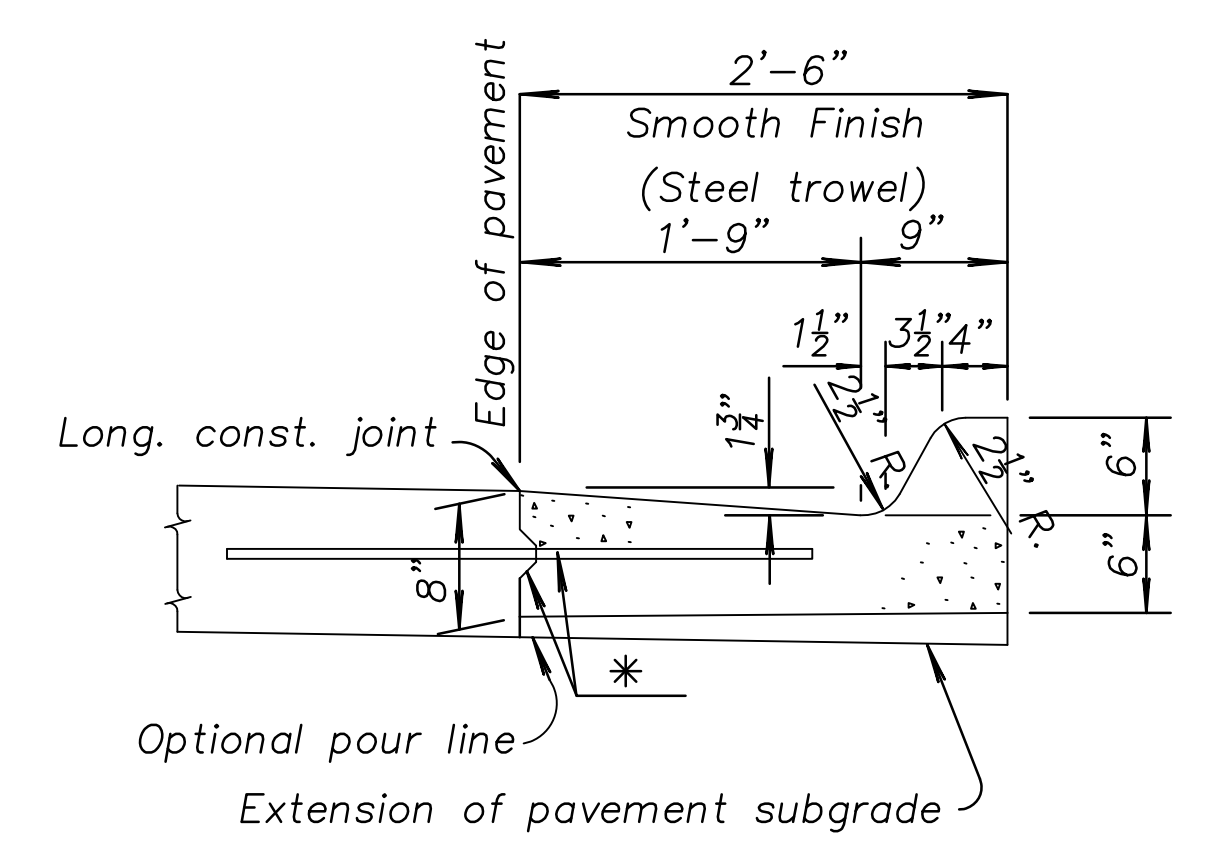

COMBINED CURB & GUTTER - TYPE I
(2'-6" WIDTH)

GENERAL NOTES


Combined curb and gutter or gutter adjoining concrete pavement may, at the contractor's option, be poured either monolithically or separately, using either the mix used in the concrete pavement or Class "A" Concrete (AE). The combined curb and gutter or gutter shall have the same section as shown on the plans. If poured monolithically, dowel bars may be omitted from the combined curb and gutter or gutter, but the wire mesh shall be extended to 6" or less from the back of the curb or gutter. Pavement joints shall be continued through curb or gutter and no other planes of weakness will be required. Joints in the combined curb and gutter or gutter are to be filled with the same material as used for the pavement joints.

Expansion joints in the combined curb and gutter are to be placed opposite expansion joints in the pavement.

Where combined curb and gutter or gutter does not abut concrete pavement or concrete base course, omit tie bars and longitudinal construction joint and place a 1" pre-moulded Expansion Joint Filler (Nonextruding, Type B) cut to the dimensions of the combined curb and gutter or gutter, at a spacing not to exceed 3" and at the ends of curb returns.


Where combined curb and gutter or gutter is adjacent to bituminous construction, planes of weakness shall be constructed at 20' intervals.

Longitudinal joints shall be sawed and sealed with joint sealant. See special provisions.

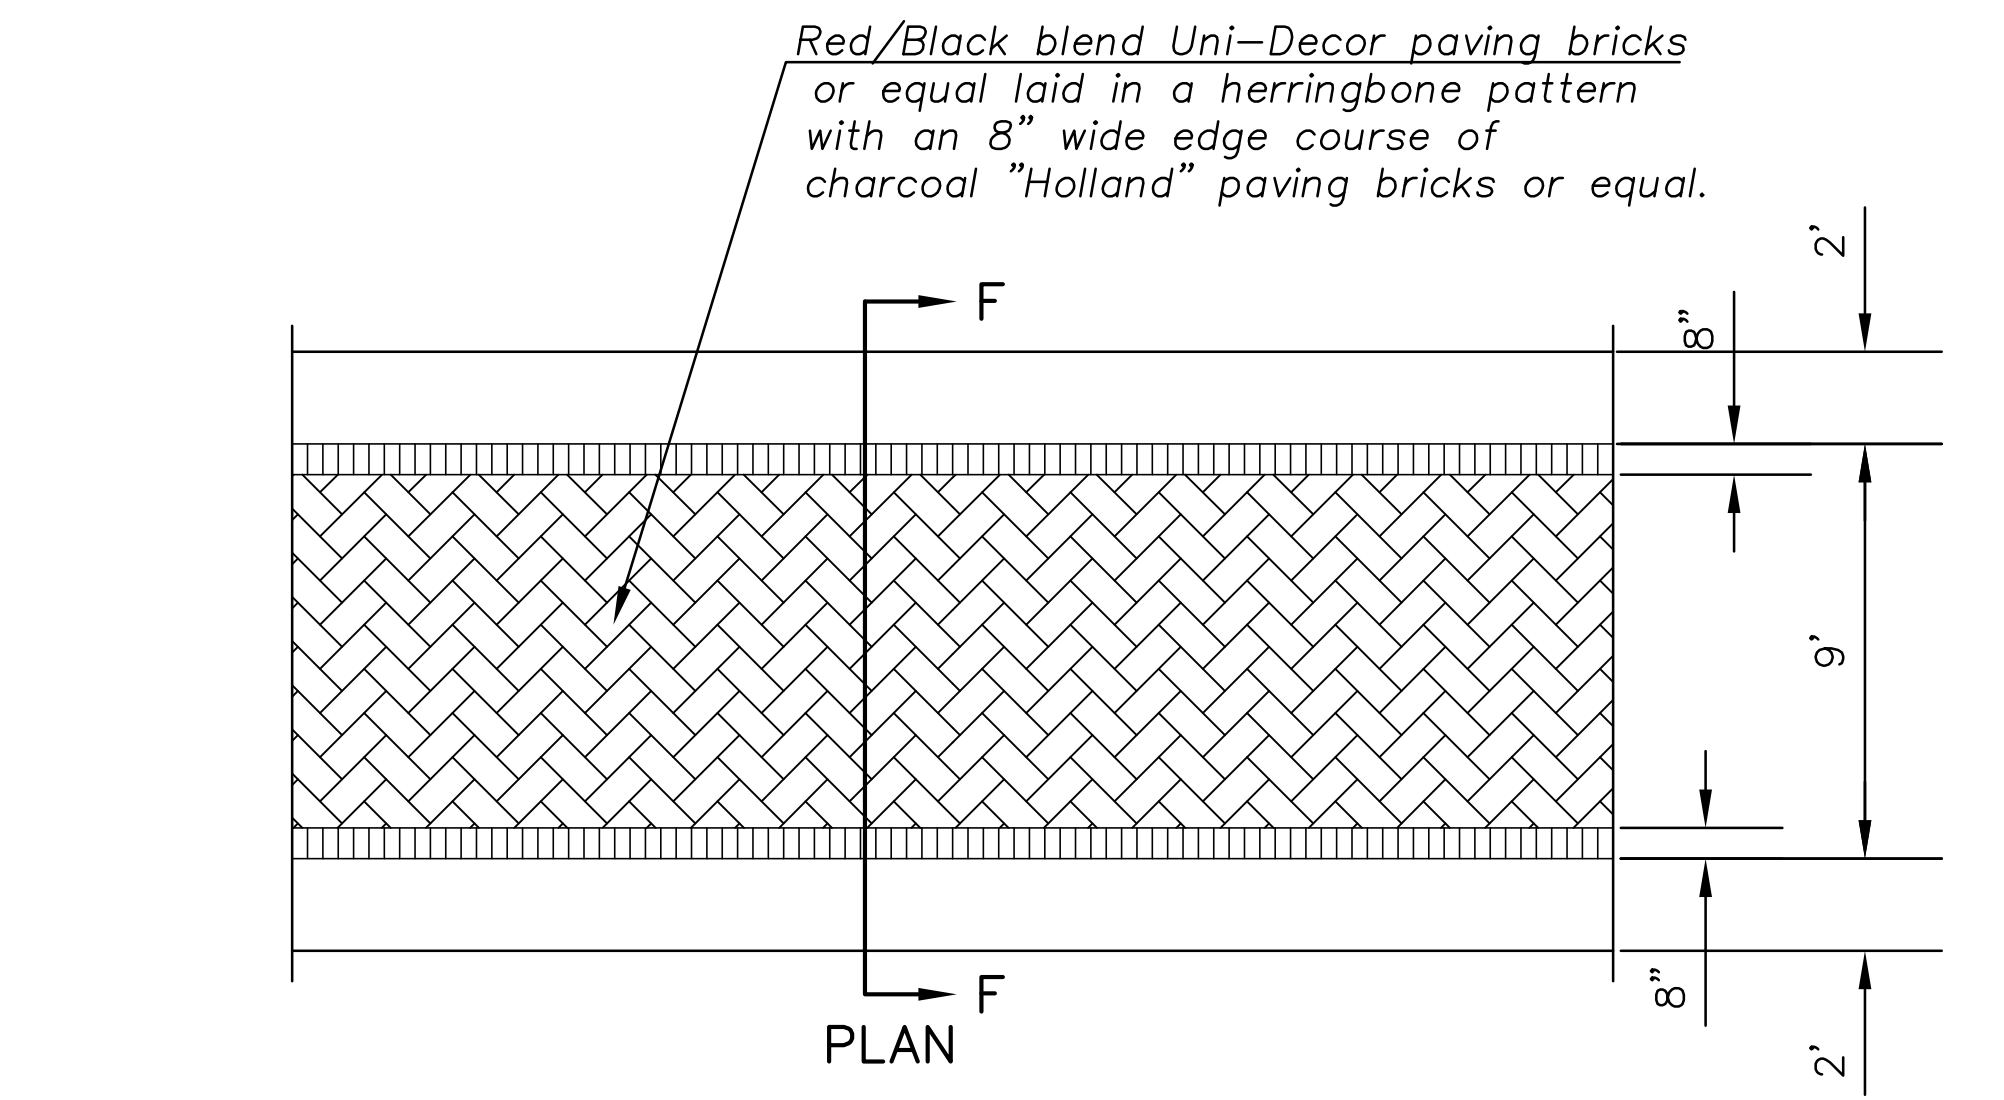

Notes:

1. Payment for sandbed and Class A Concrete under the bricks, shall be subsidiary to the bid item "Brick Pavers".
2. Payment for the 1" ø weep hole with filter fabric shall be subsidiary to the bid item "Brick Pavers".

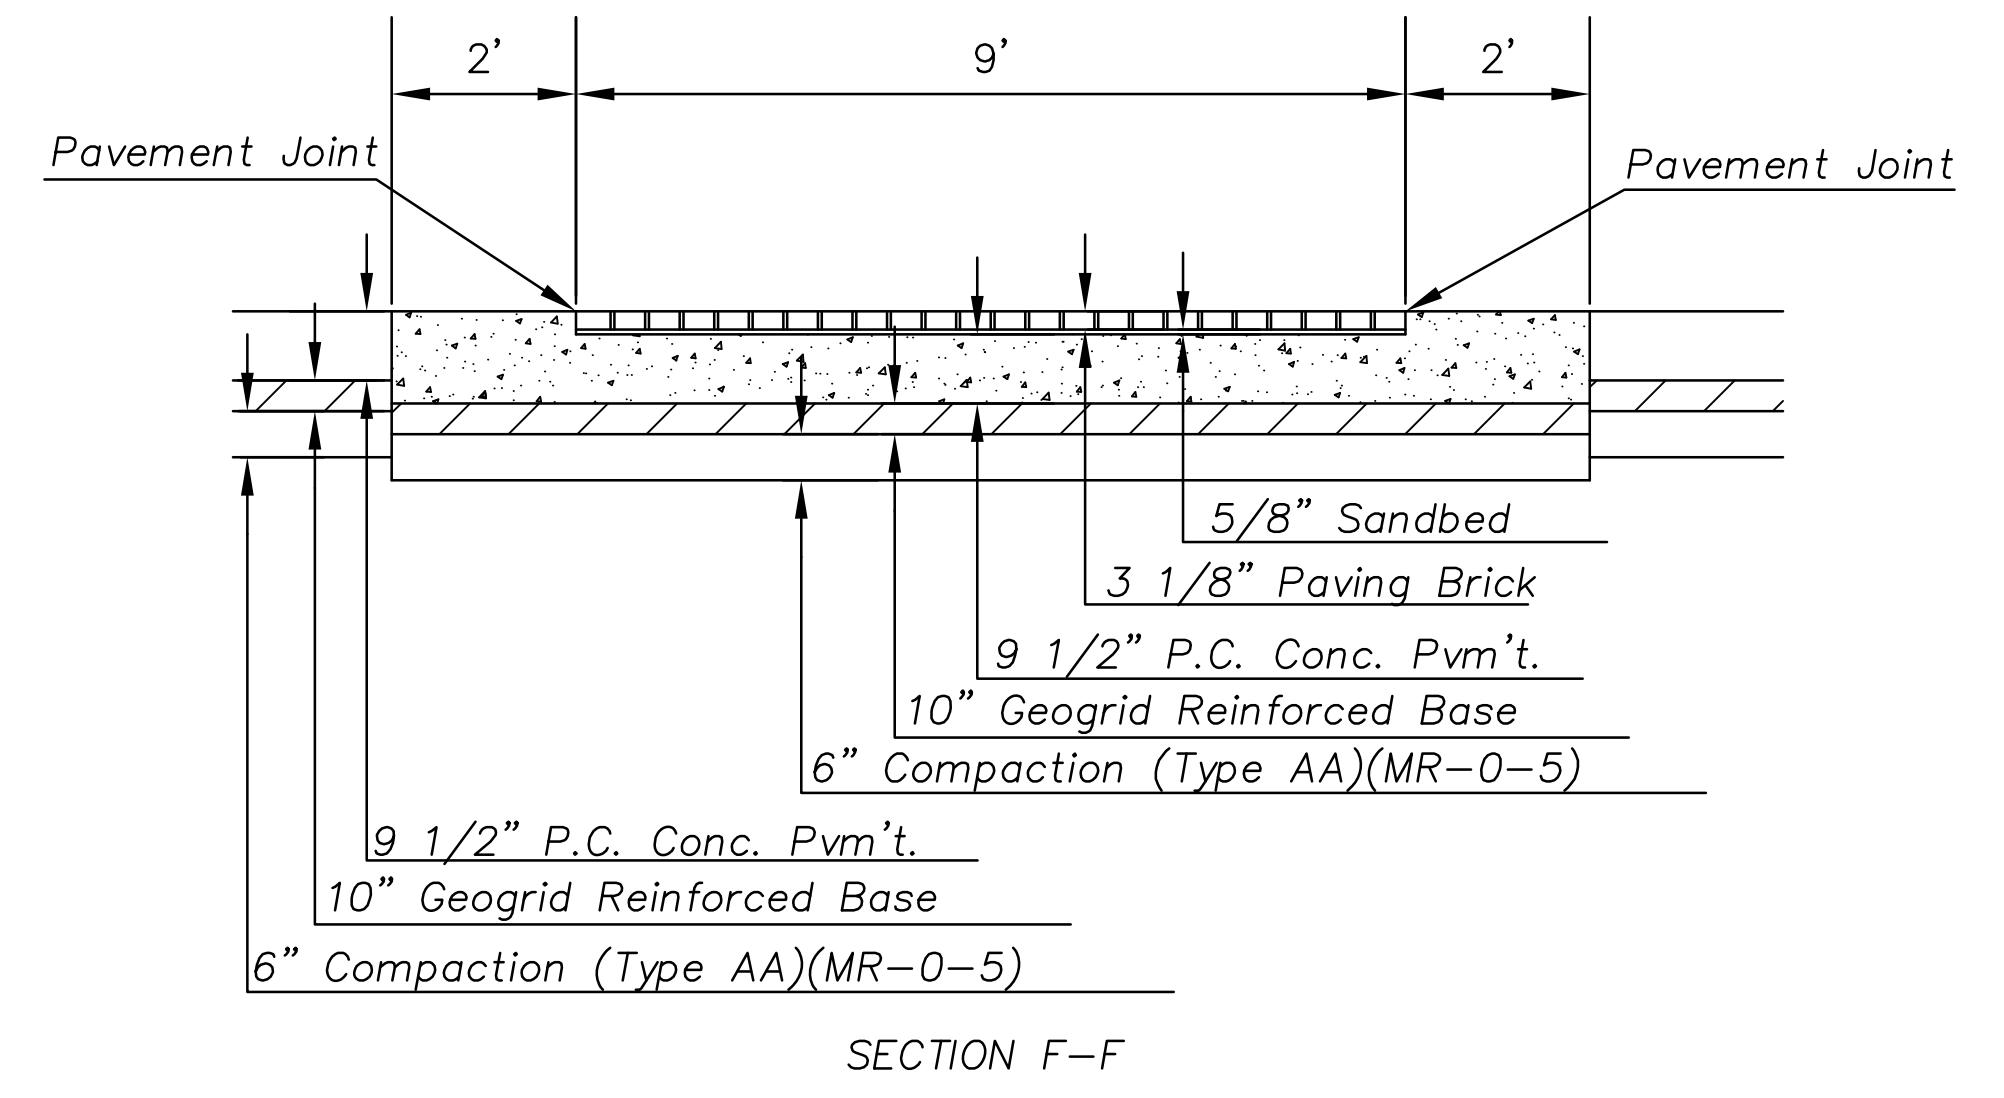

PAVING BRICK CROSSWALK

j:\2008Proj\086270\DWGS\06 CONC C&G & WHL CHR RAMP.dwg 3/14/2012 - 11:36am