


* AT CONTRACTOR'S OPTION
CONSTRUCT 100mm PAVEMENT IN
ONE LIFT, USING SURFACE COURSE
MIX.

**** GEOGRID REINFORCEMENT AND EXTRA
WIDTH OF COMPACTED SUBGRADE
AND AGGREGATE BASE ARE
SUBSIDIARY TO BID ITEM FOR SQ.
METERS CRUSHED CONCRETE BASE.**

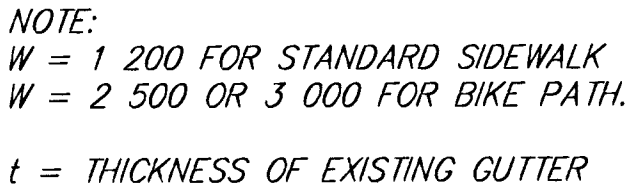

*25 mm ASPHALT SURFACE COURSE

PLANTING/ TURF AREA

1 000

*** 150

1:10 MAX.

1:4 MAX.

3 000 m

SLOPE 2%**

*75 mm ASPHALT BASE COURSE

1 000

FINISHED GRADE

1:10 MAX.

1:4 MAX.

GRADE TO MATCH EXISTING

TOPSOIL

125mm CRUSHED AGGREGATE BASE.

*** GEOGRID REINFORCEMENT (3 m WIDE) (TENSAR BX 1100 OR EQUAL).

150mm MIN. COMPACTED SUBGRADE (98% STD. DENSITY) TO EXCAVATION LIMIT

UNDISTURBED EARTH

Technical drawing of a tapered shaft with a keyway. The shaft has a total length of 100 mm. The left end has a diameter of 38 mm. The right end has a diameter of 30 mm. The shaft is tapered. A keyway is located on the right end, with a width of 30 mm. The keyway has a depth of 10 mm. The shaft is labeled "E.I." at the left end and "END OF SHAFT" at the right end. Dimensions are given in mm.

Diagram illustrating the construction details for a concrete curb and gutter section, showing dimensions and material specifications:

- SAW CURB AND GUTTER IF MORE THAN 1 500 TO NEAREST JOINT.**
- 13 mm EXPANSION JOINT (@ CONC. PVMT. ONLY)**
- 6 mm TROWELED GROOVES.**
- REMOVE AND REPLACE CURB AND GUTTER SECTION.**
- REMOVE AND REPLACE CURB TO NEAREST JOINT IF LESS THAN 1 500.**
- Dimensions:**
 - Vertical dimension: 3 000
 - Horizontal dimension: 1 800 MIN. 3 000 MAX.
 - Horizontal dimension: 1:12 MAX.
 - Horizontal dimension: 300 mm
- Labels:** A, B, E.V.

K96 BIKEPATH MISCELLANEOUS DETAILS						PROJECT July 29, 2001
 924 NORTH MAIN WICHITA, KANSAS 67203 www.srb.com 316-264-8008 FAX 264-4821 E-Mail: info@srb.com						
SAVOY, RUGGLES & BOHM, P. A. ENGINEERING & SURVEYING						DATE 35
PROJECT NUMBER +						
DRAWING JTS	DESIGN T.C.R.	REVIEW	DATE June 27, 2001	UTILITY	SRB JOB 1554T	SHEET NO. 49