



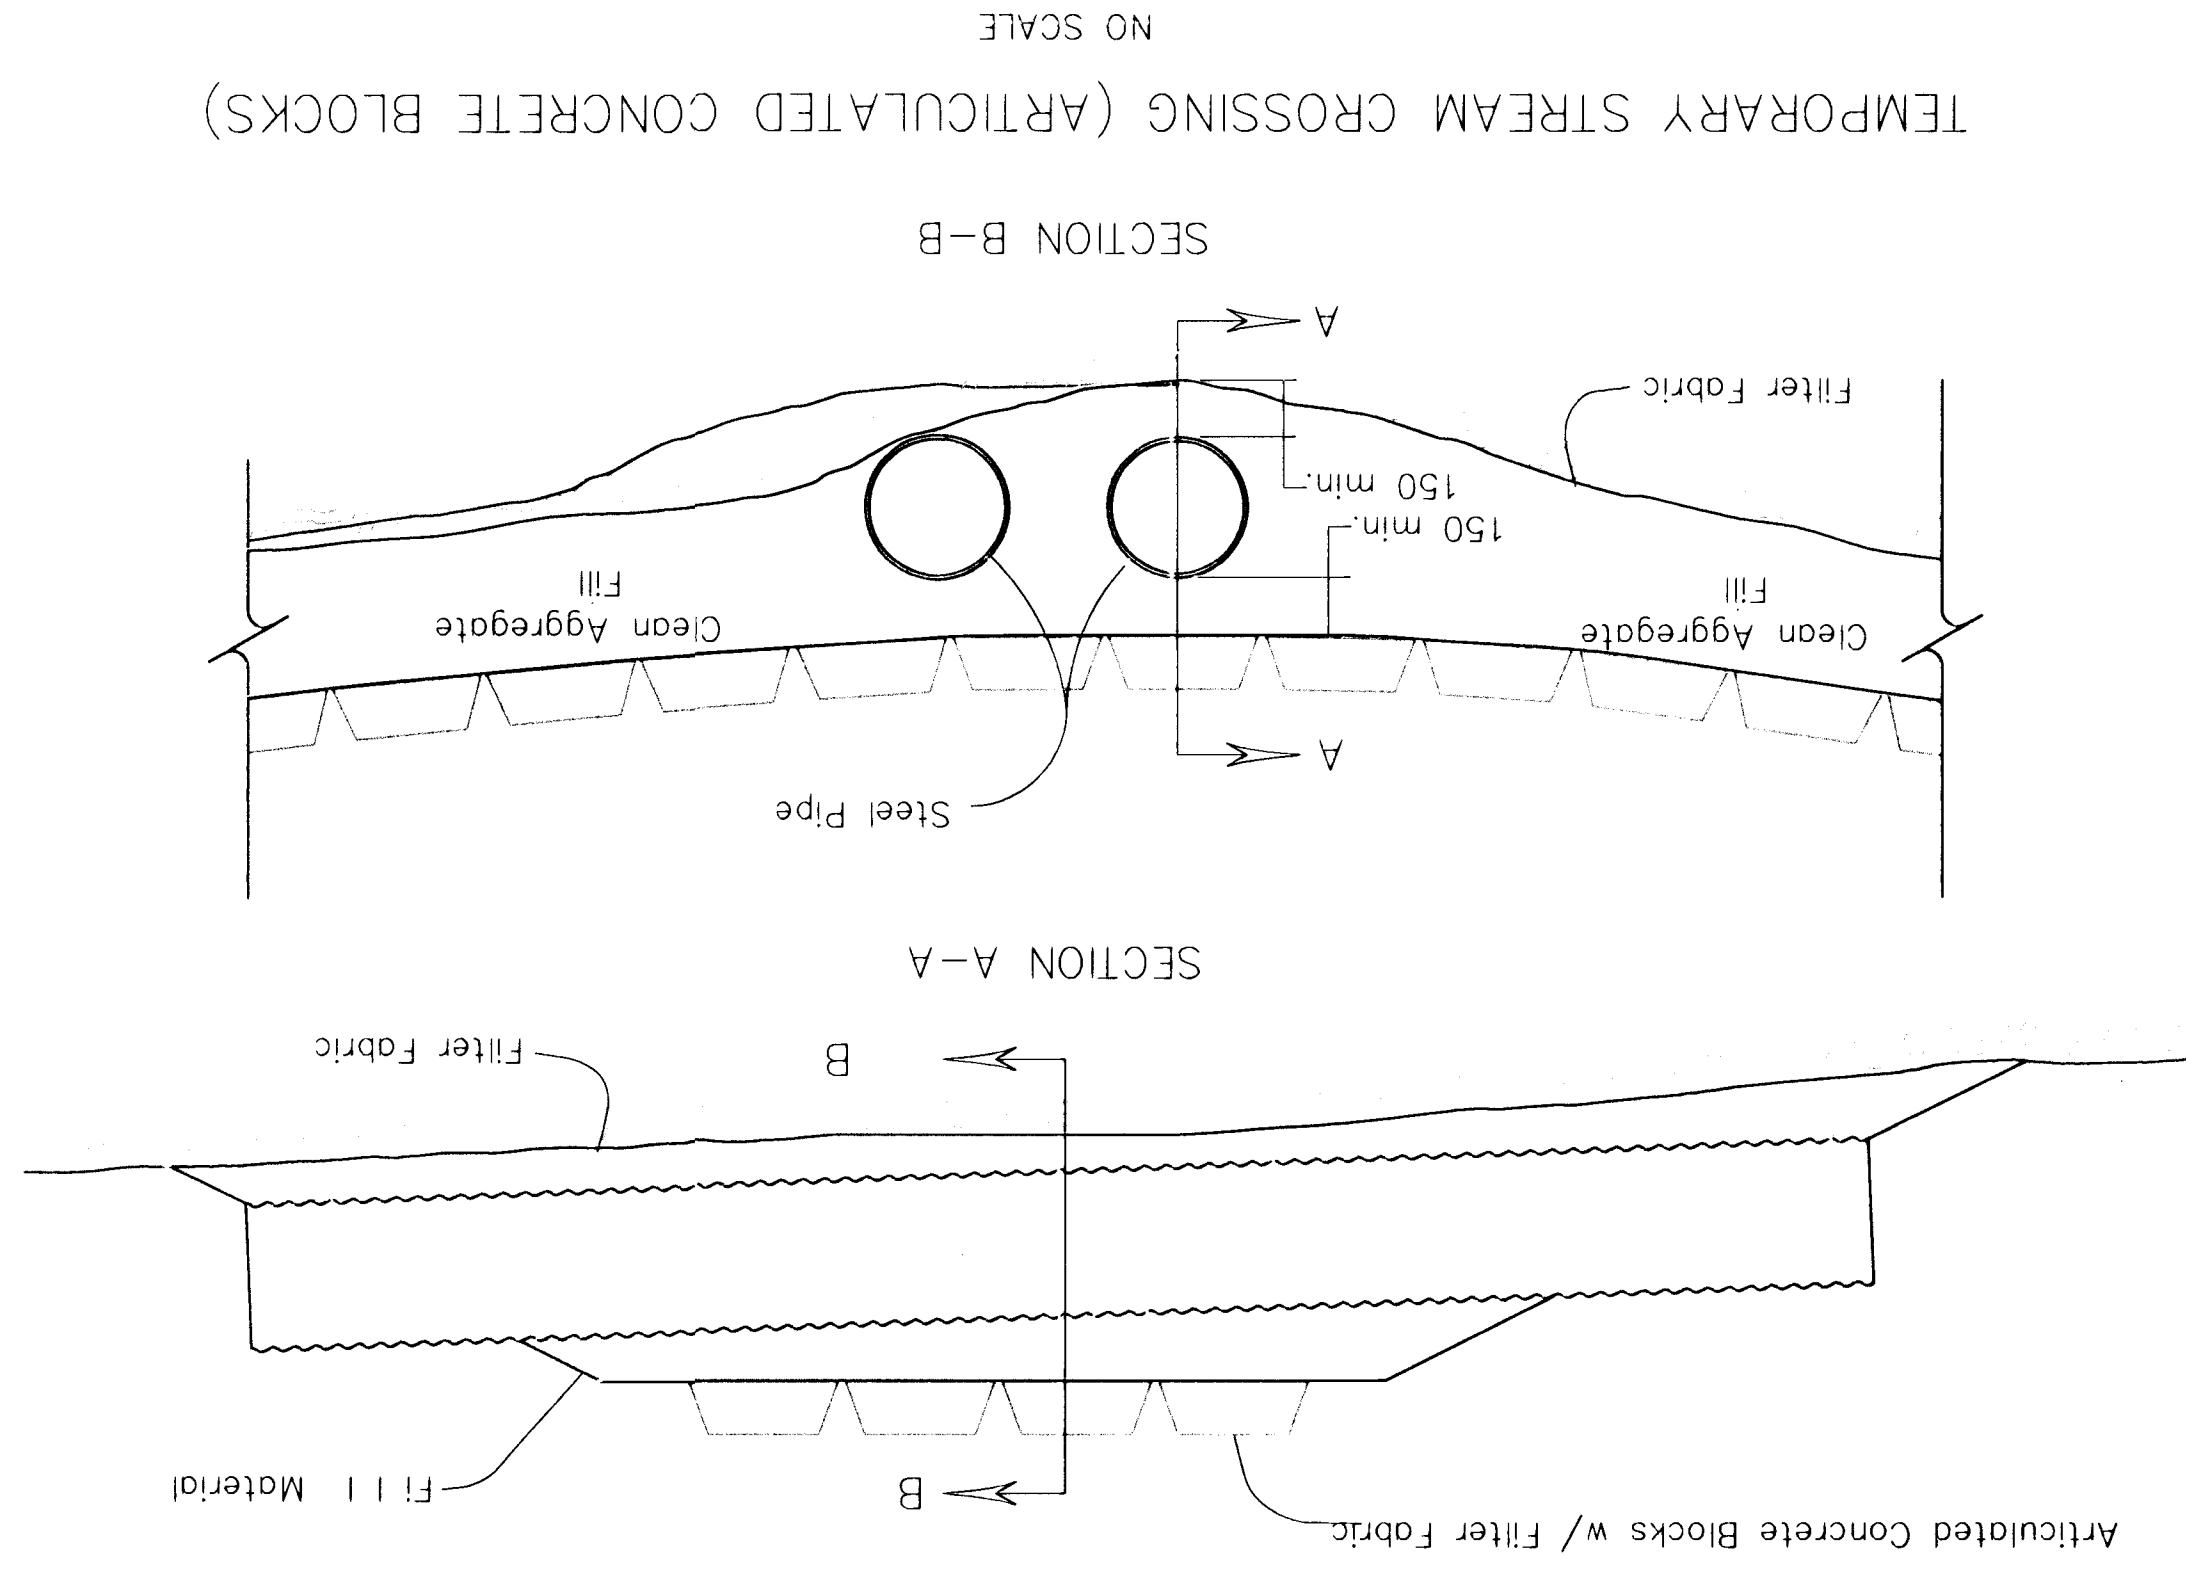

NOTE: Quantity, length and diameter of steel pipe to be determined by design flow calculations.

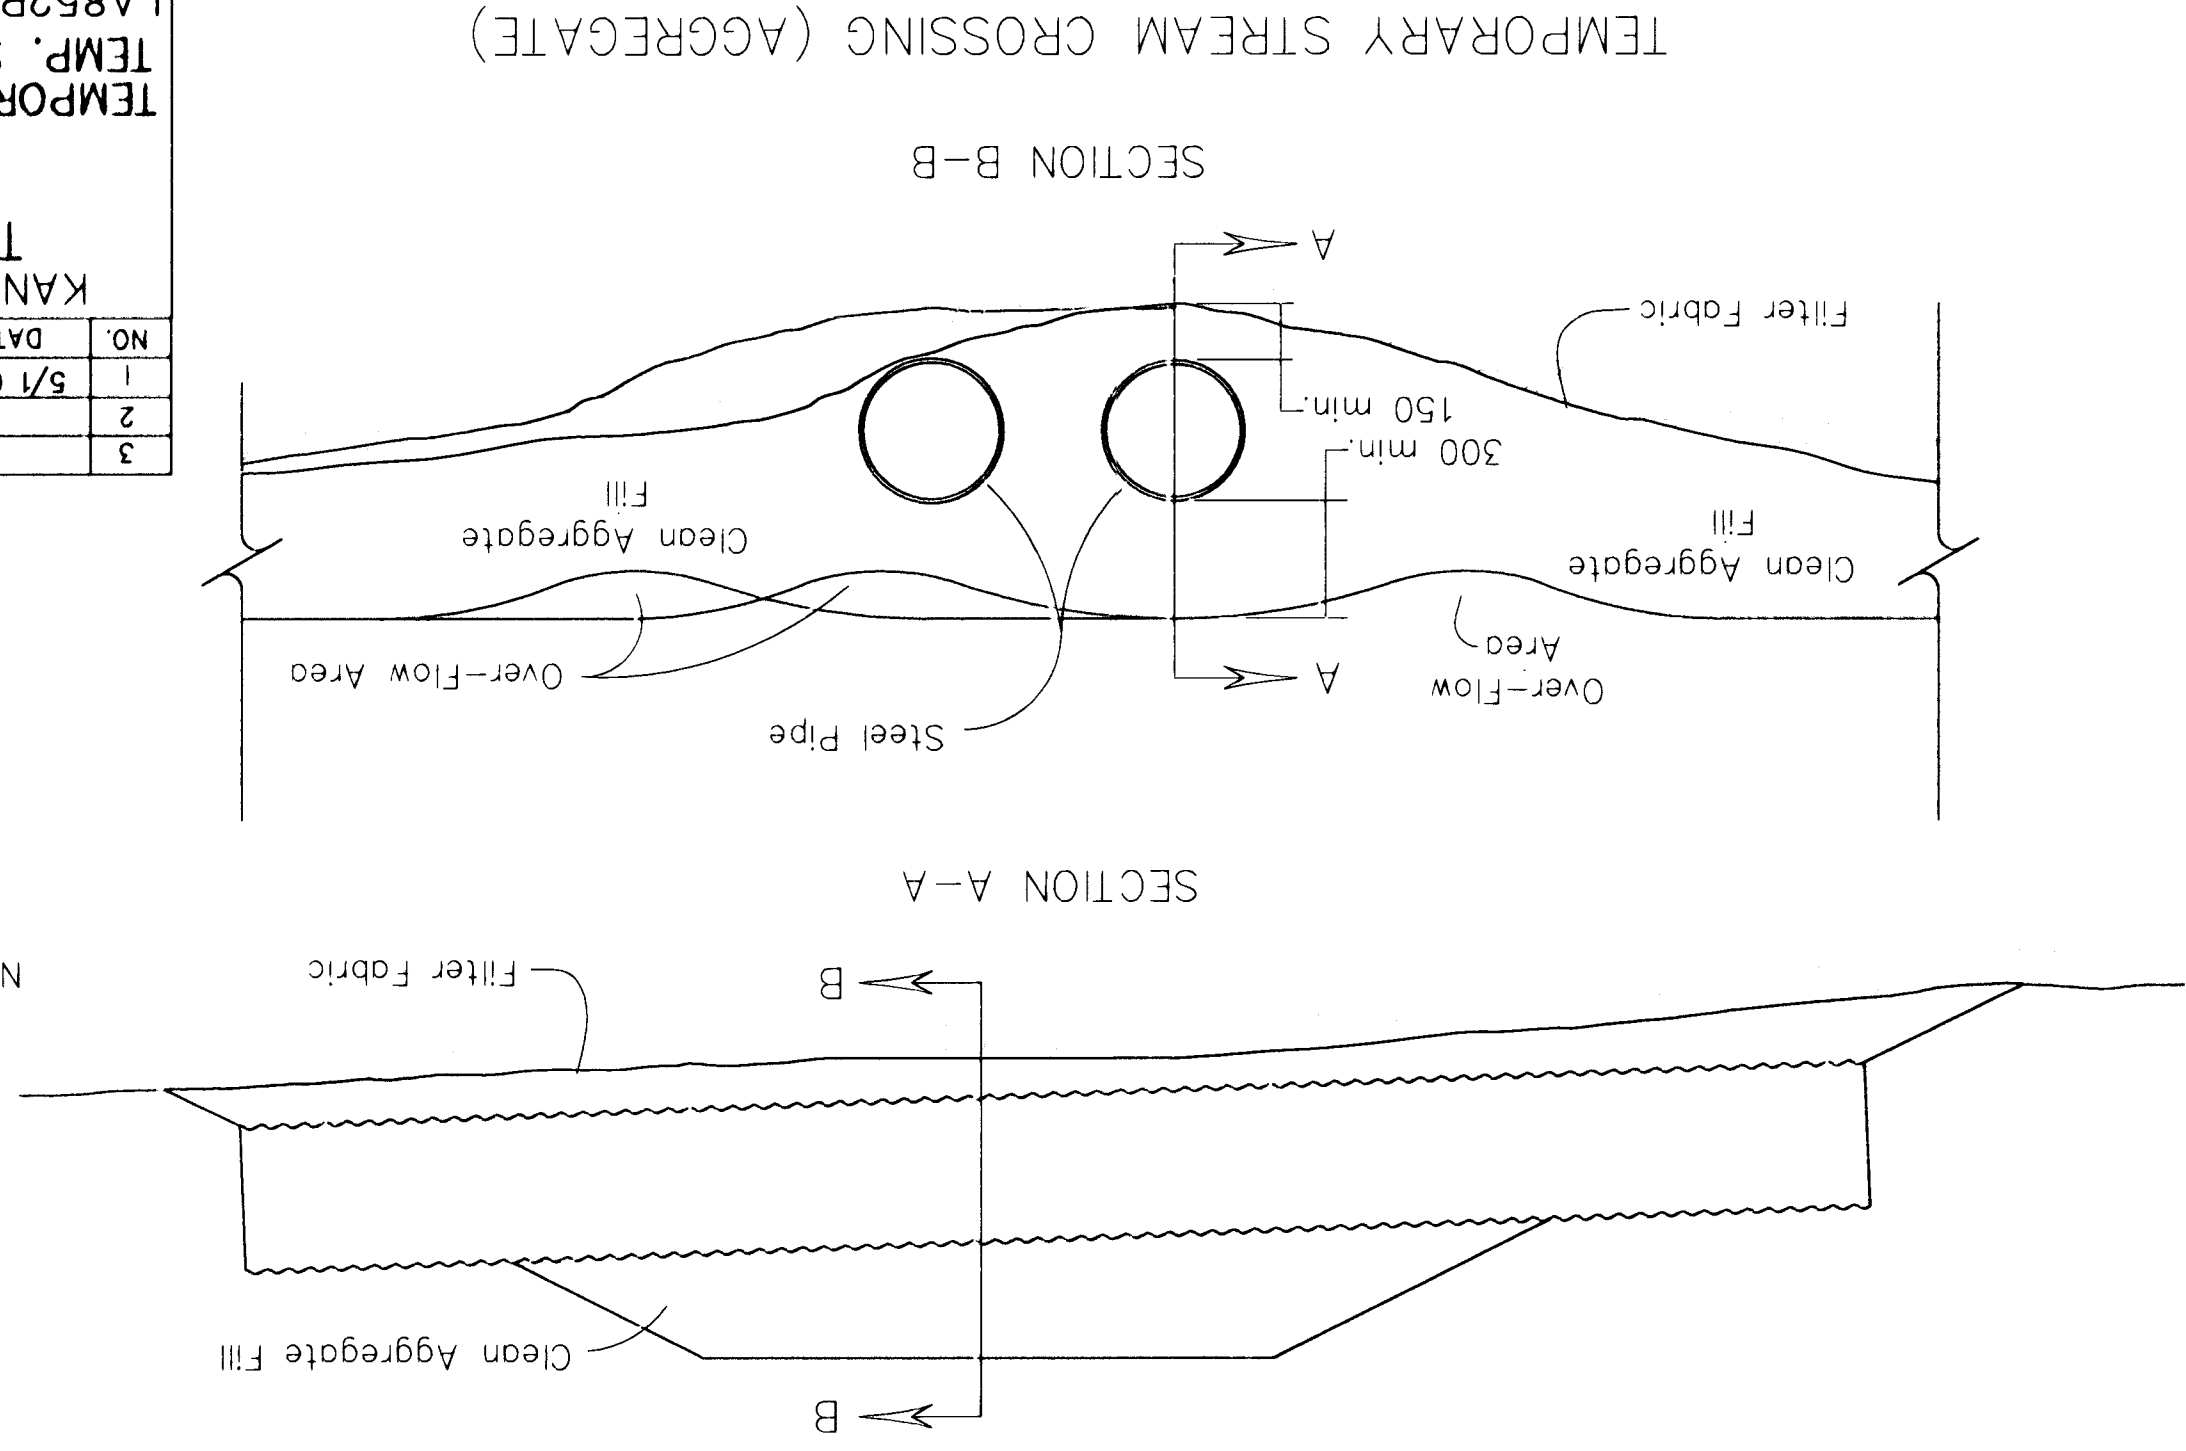

NO.	DATE	REVISIONS	BY	APP'D
1	5/1 0/89	Revised Standard	WCL	RDR
2				
3				

KANSAS DEPARTMENT OF TRANSPORTATION

TEMPORARY EROSION AND

POLLUTION CONTROL

TEMPORARY SLOPE DRAIN

TEMPORARY STREAM CROSSING (AGGREGATE)

TEMP. STREAM CROSS. (ARTIC. BLOCKS)

I A852B SI



F.H.W.A. APPROVAL

5/20/89

APP'D

Richard D. Ross

DESIGNED BY	WCL	QUANTITIES	WCL	TRACED BY	WCL	RDR
DETAILS BY	RDR	QUANTITIES	WCL	TRACED BY	WCL	RDR

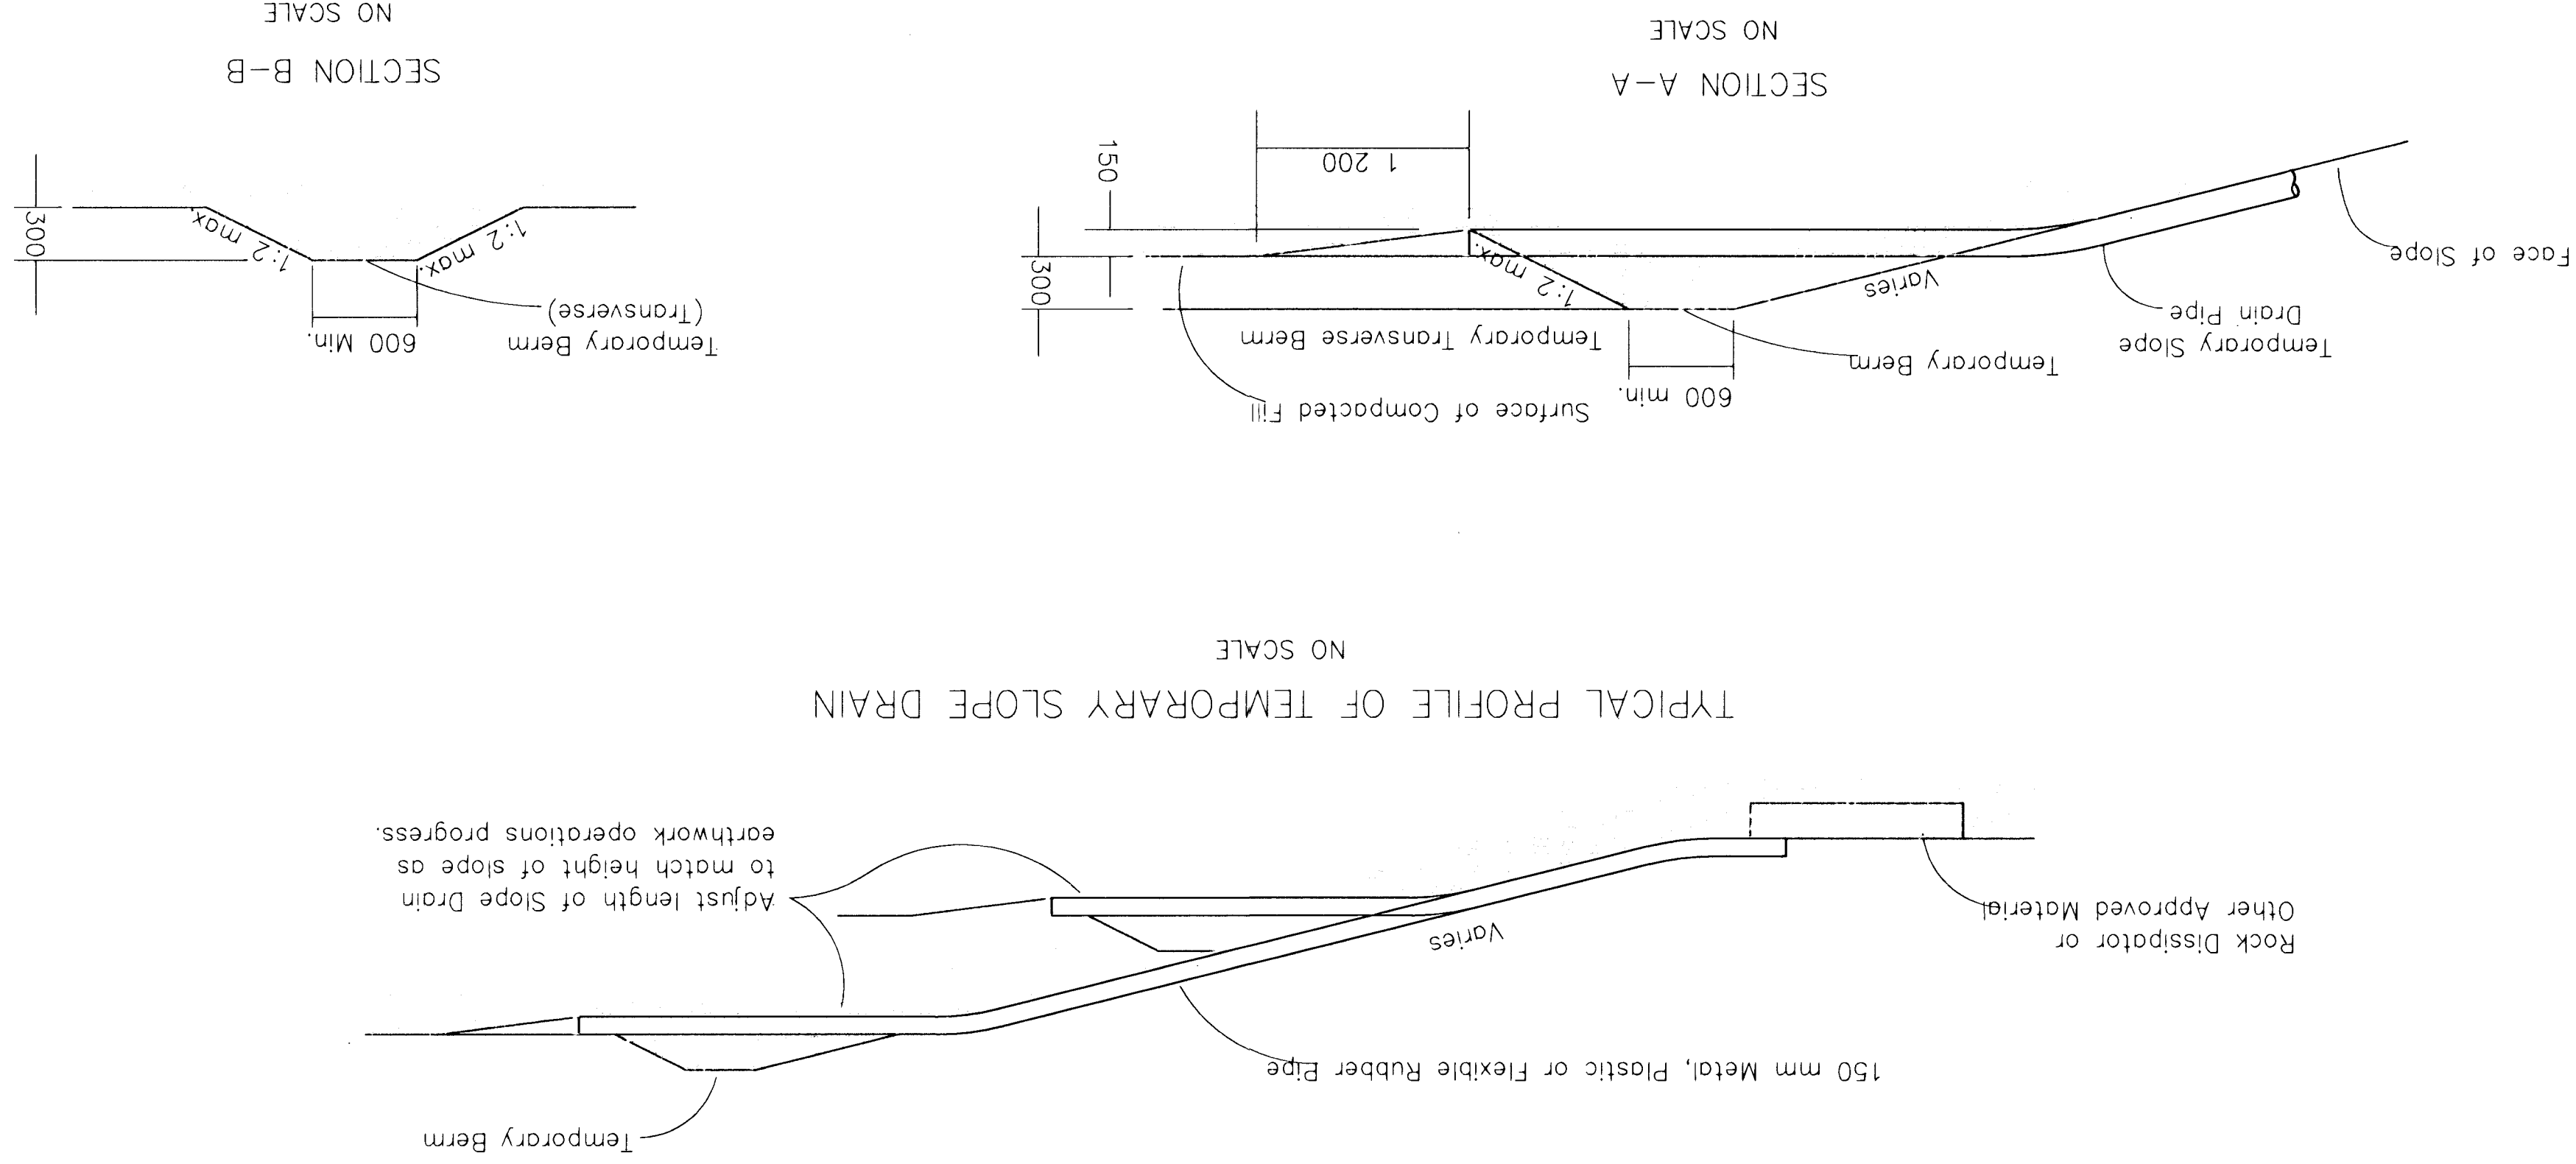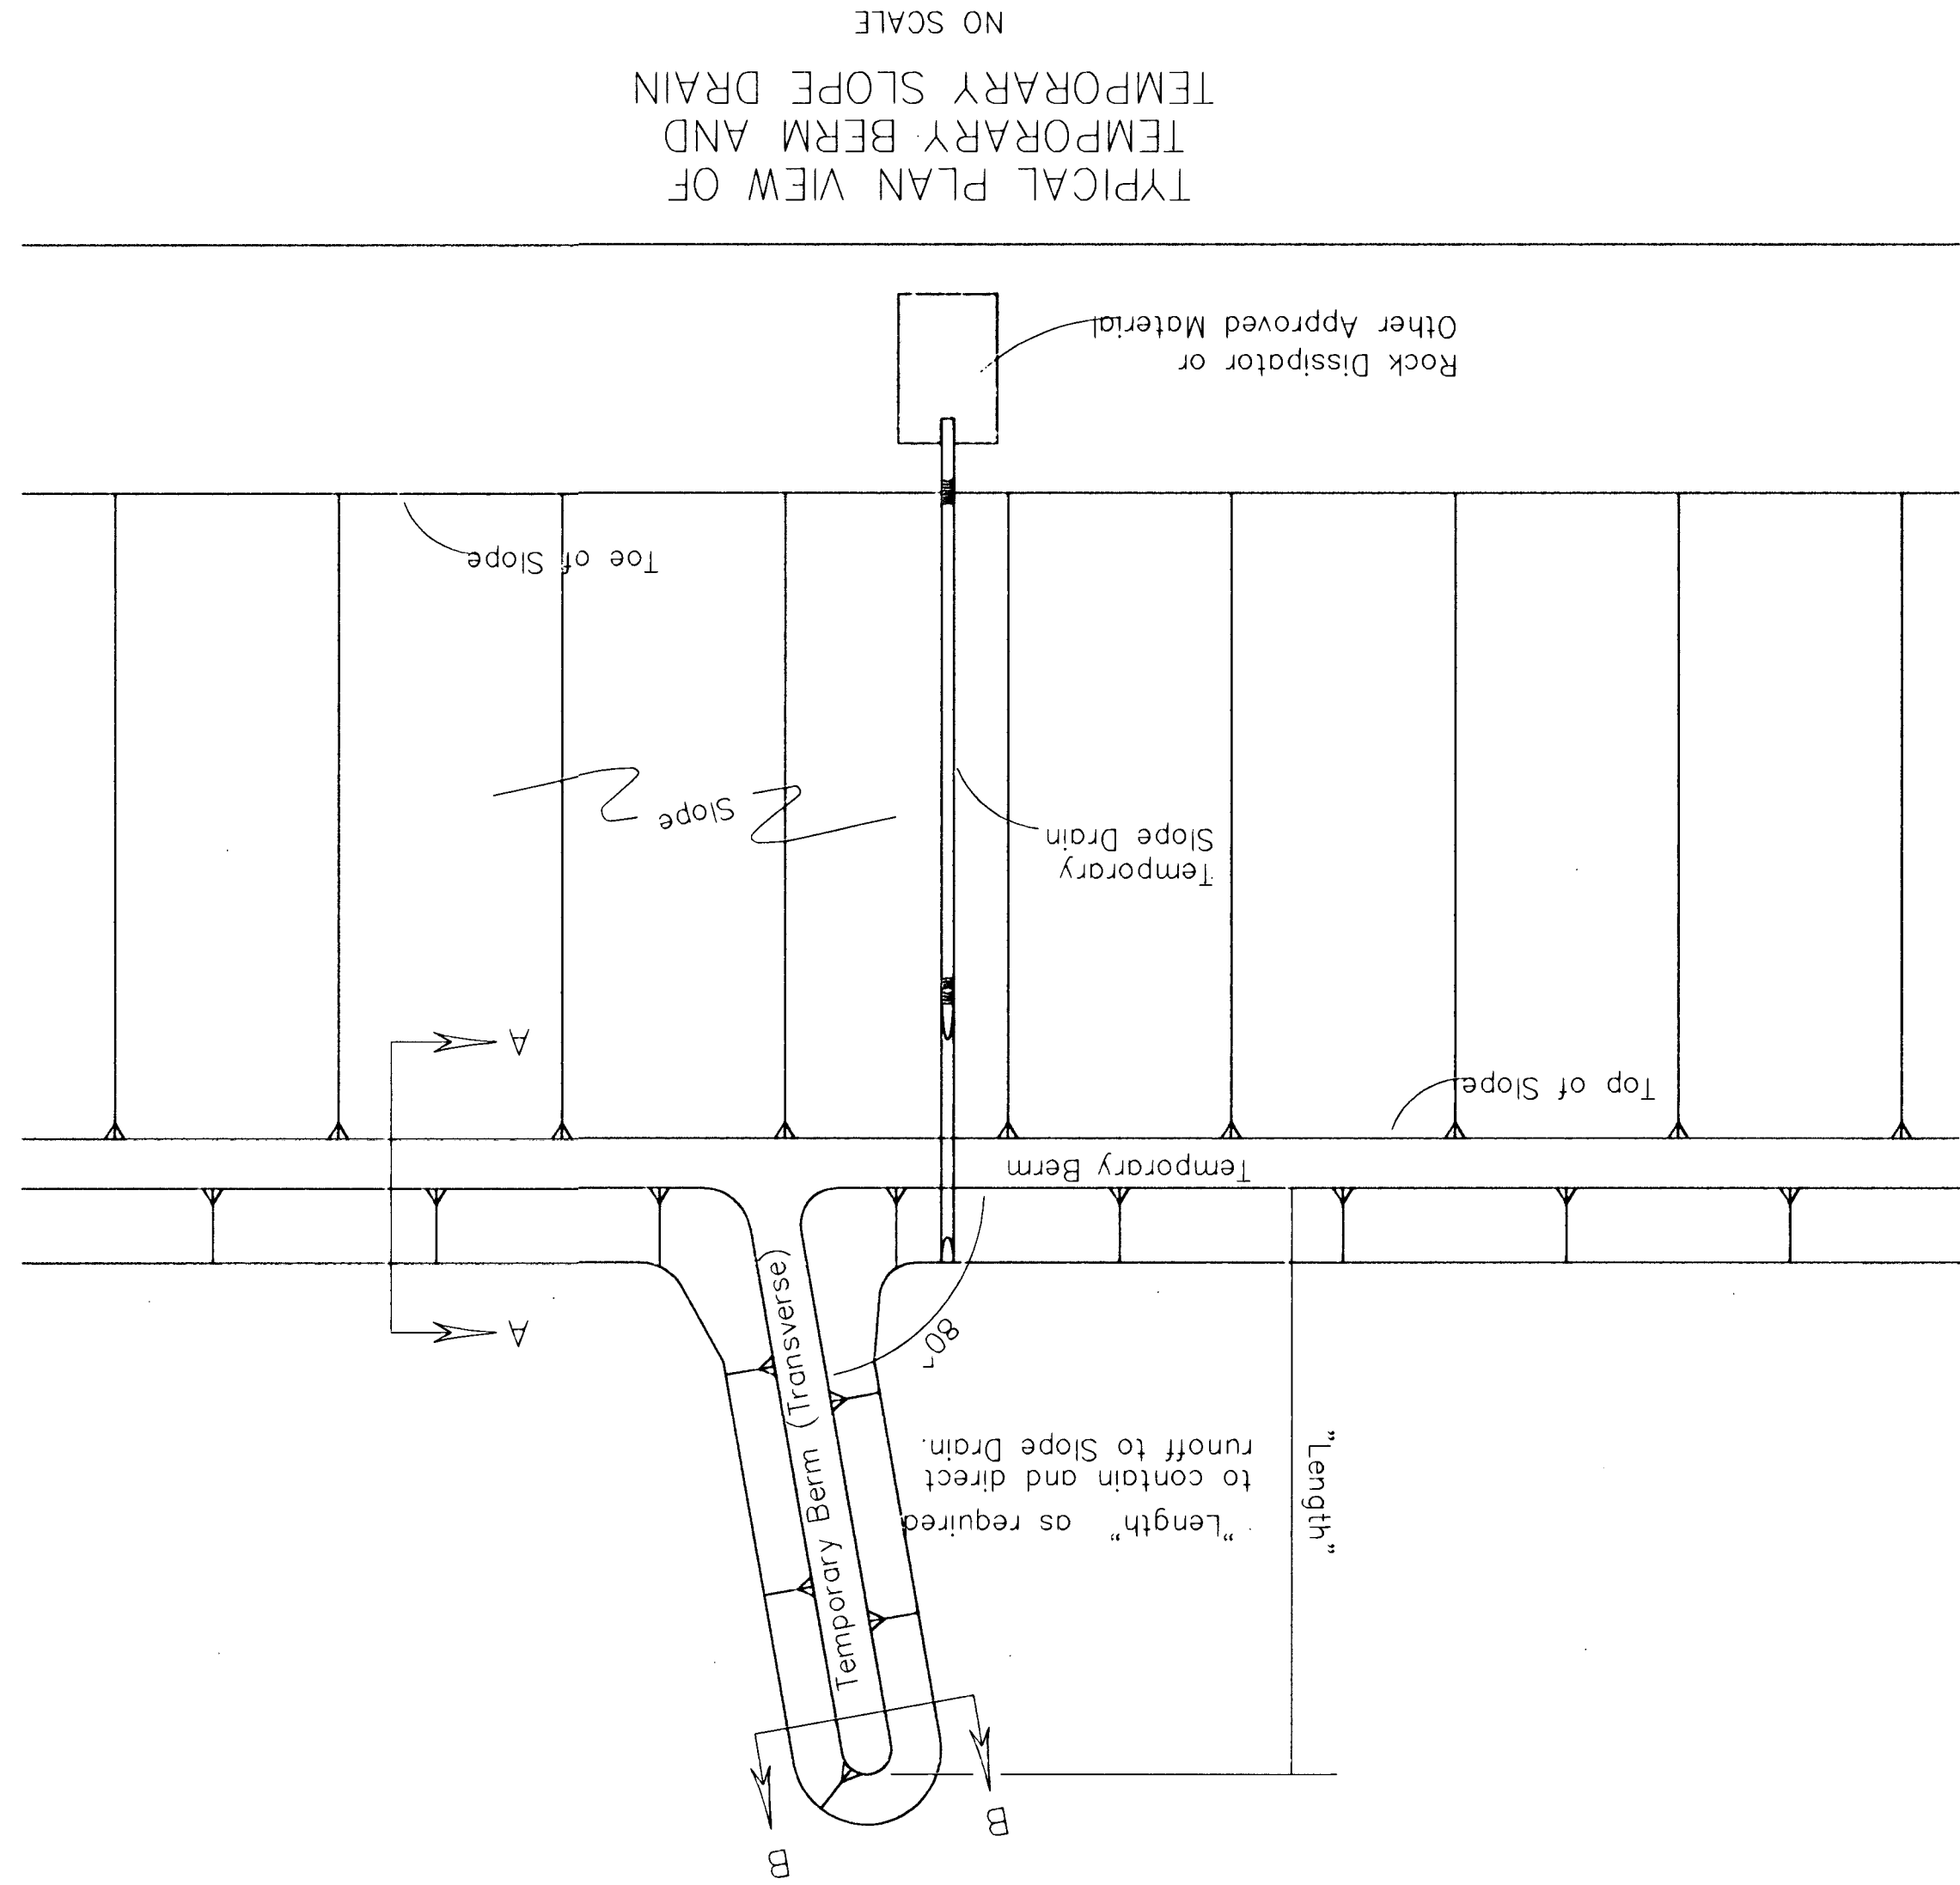

- NOTES:
- 1) Temporary Slope Drain and Temporary Berm may be used on either project foreslopes or project backstopes.
 - 2) Discharge of Slope Drains shall be into stabilized ditch or area, or into Sediment Basin.
 - 3) Pipe shall be secured in place as approved by Engineer.

7	KANSAS	87TE-0115-01	1997	45	49
FHWA REGION STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS	