



FHWA REGION NO.	STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
7	KANSAS	STP-N012(901)	1999	67	131


- NOTES:
- 1) Temporary Slope Drain and Temporary Berm may be used on either project foreslopes or project backslopes.
 - 2) Discharge of Slope Drains shall be into stabilized ditch or area, or into Sediment Basin.
 - 3) Pipe shall be secured in place as approved by Engineer.

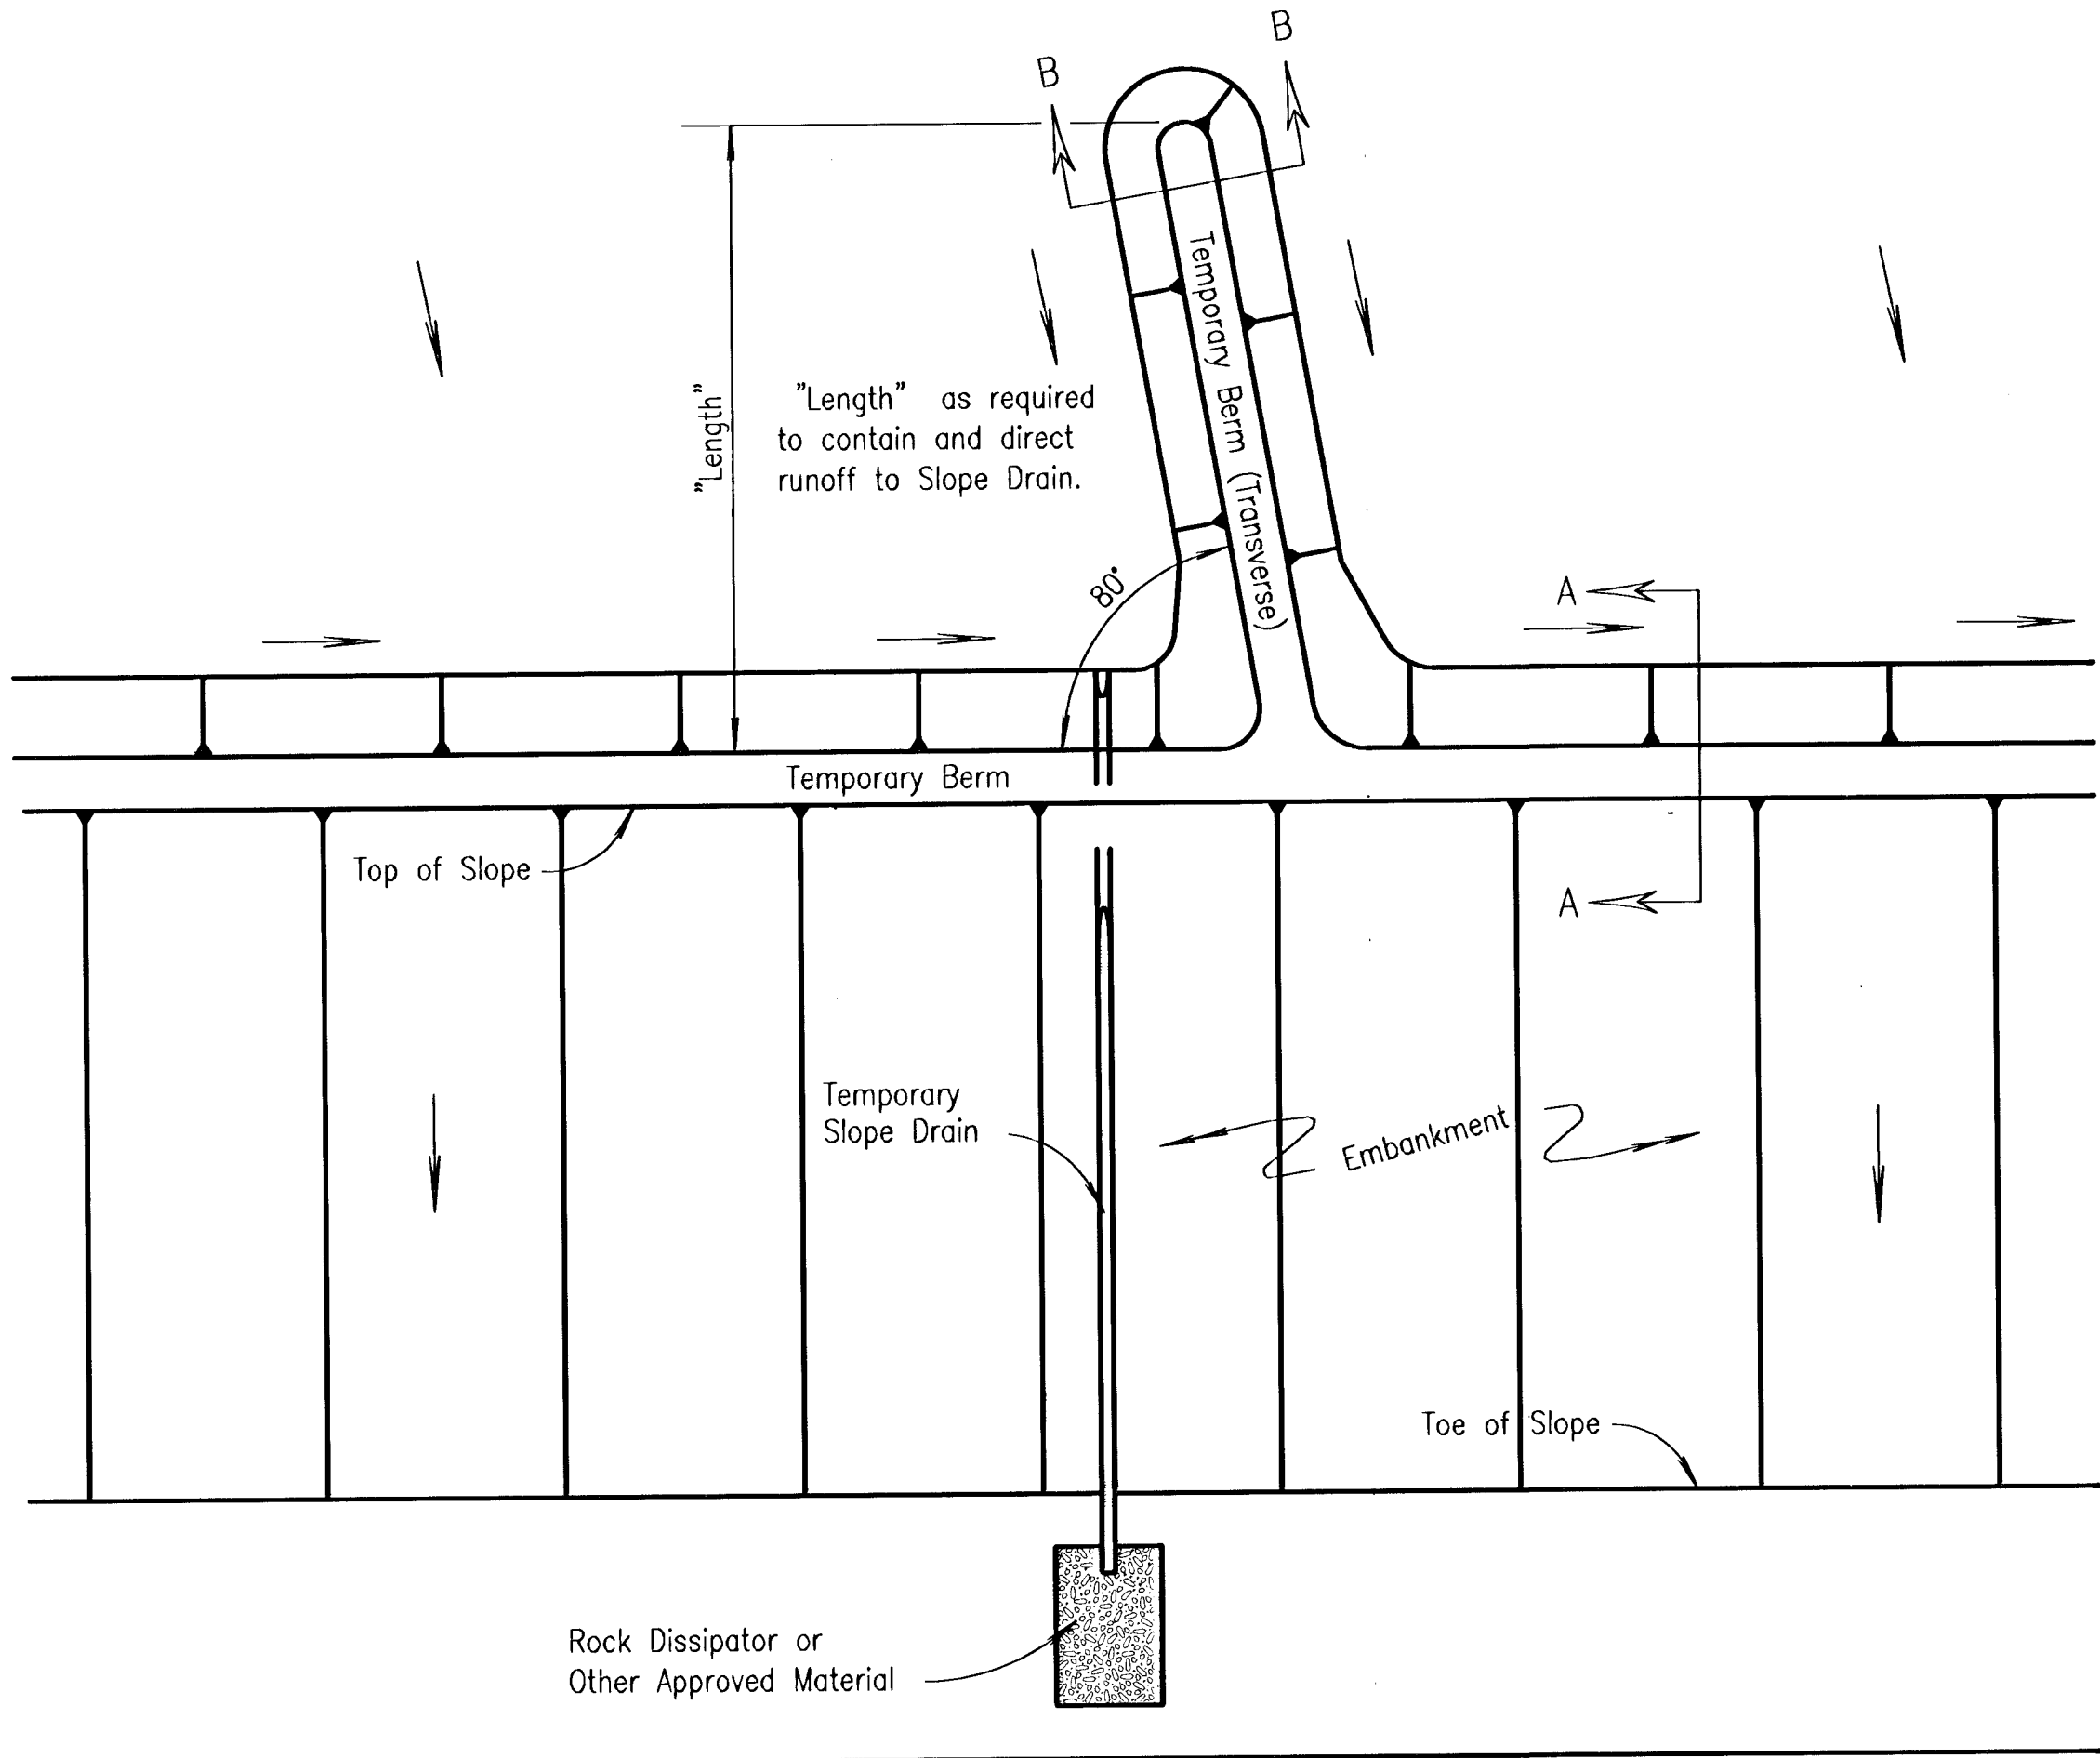


TYPICAL PLAN VIEW OF
TEMPORARY BERM AND
TEMPORARY SLOPE DRAIN
NO SCALE

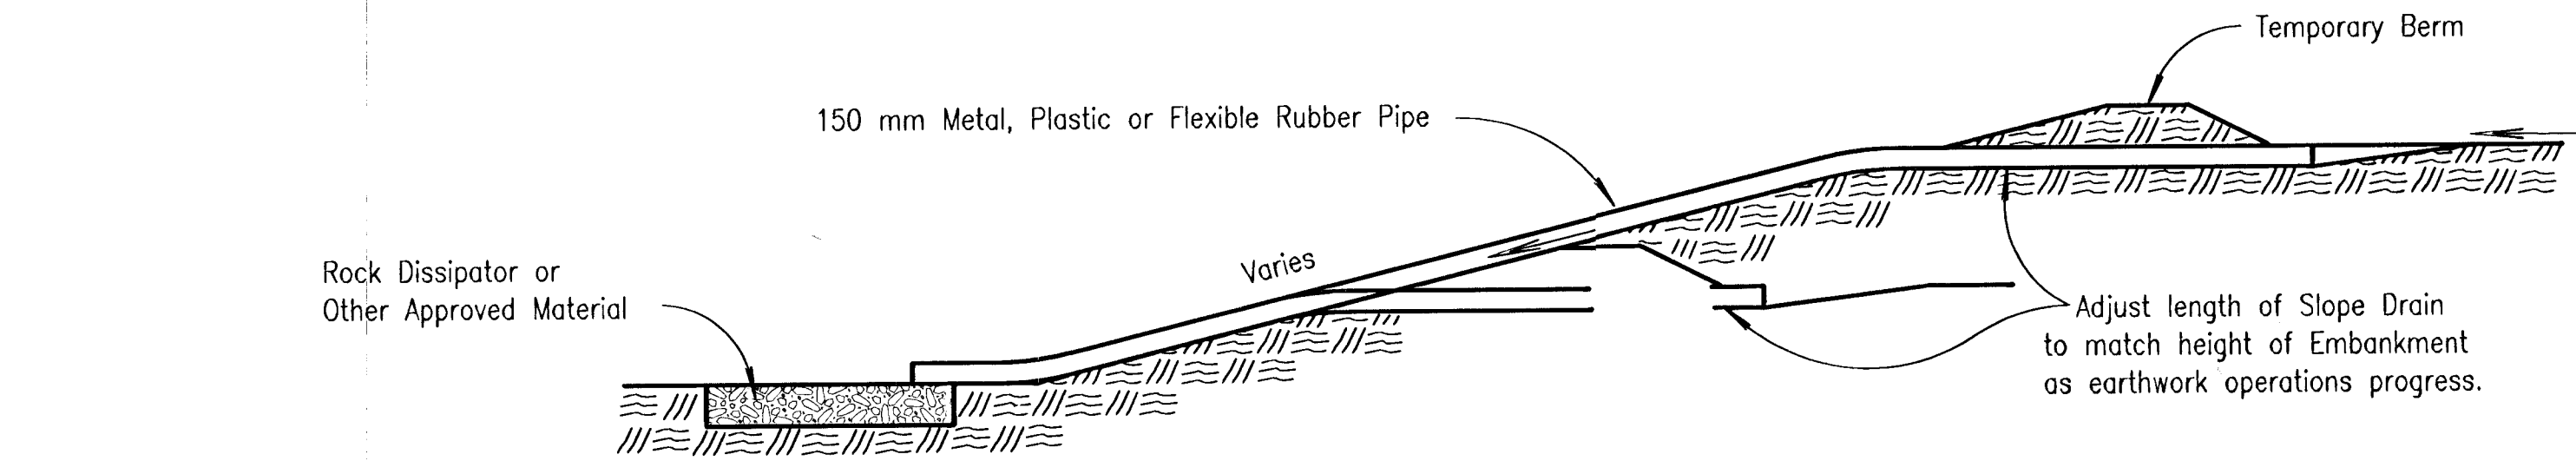

TYPICAL PROFILE OF TEMPORARY SLOPE DRAIN
NO SCALE

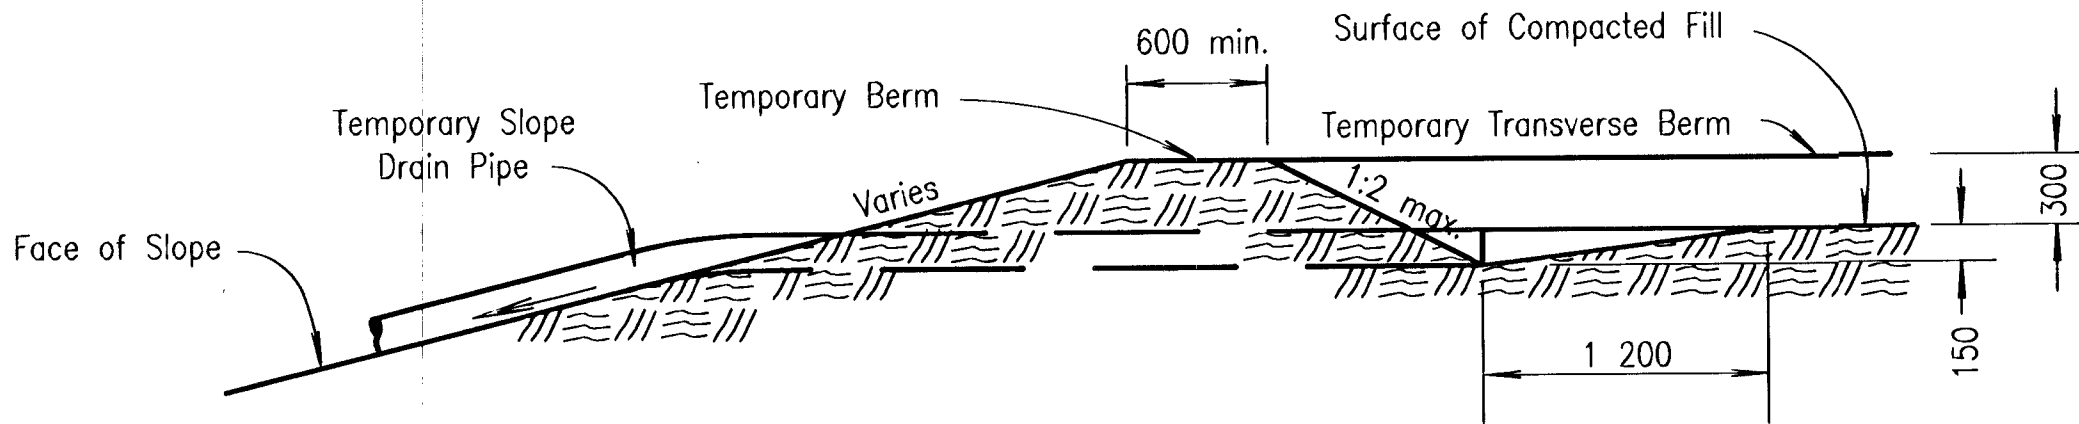


SECTION A-A
NO SCALE

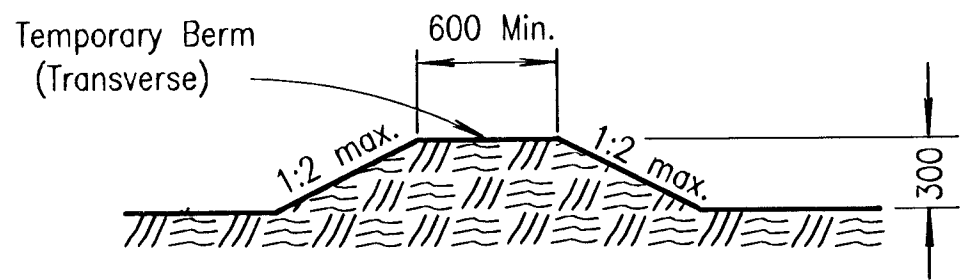


SECTION B-B
NO SCALE


TYPICAL PROFILE OF TEMPORARY BERM
NO SCALE

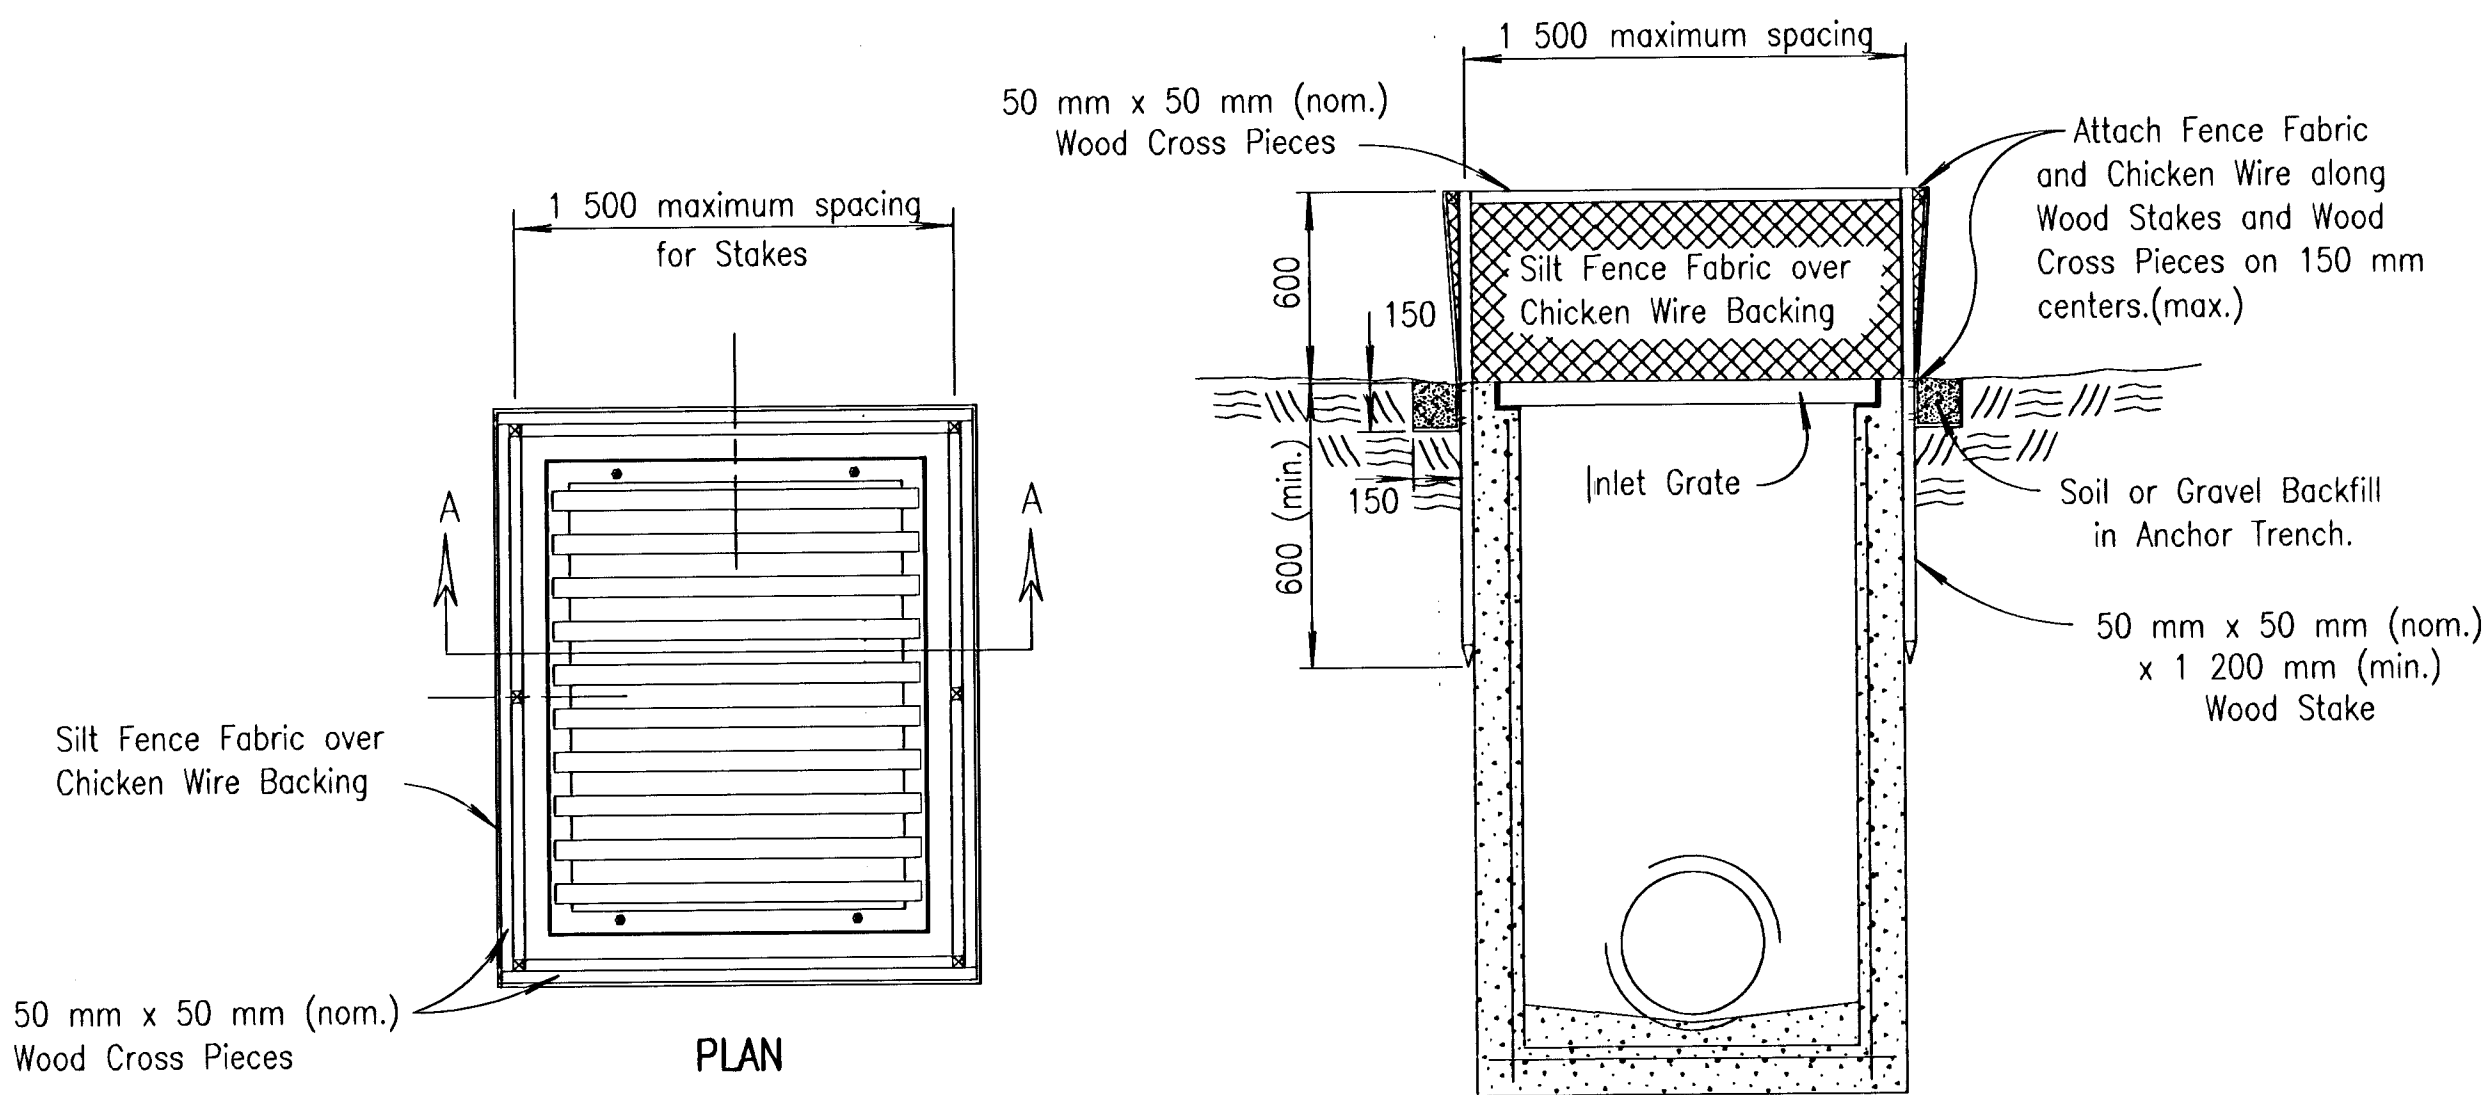

TEMPORARY INLET SEDIMENT BARRIER
NO SCALE

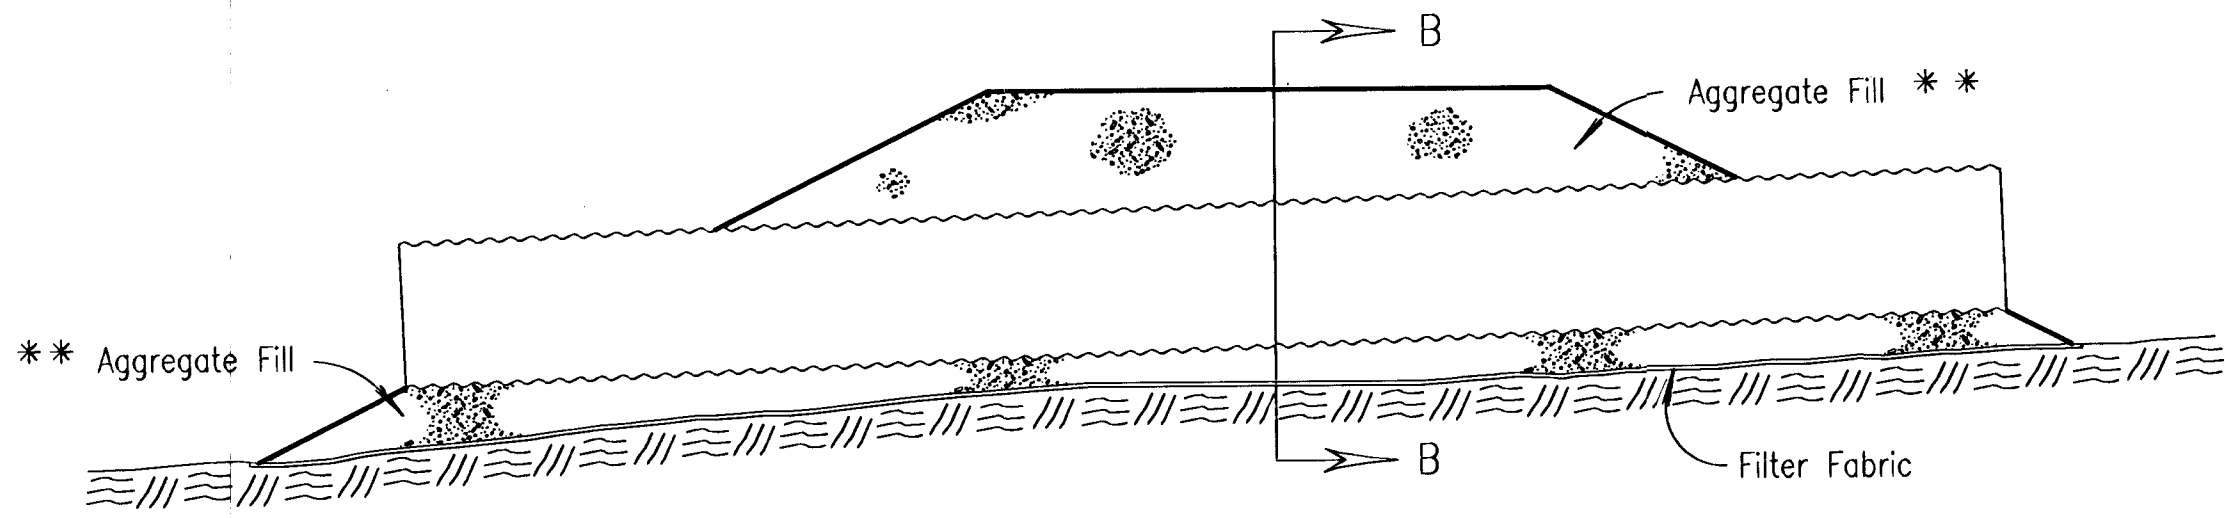

SECTION A-A

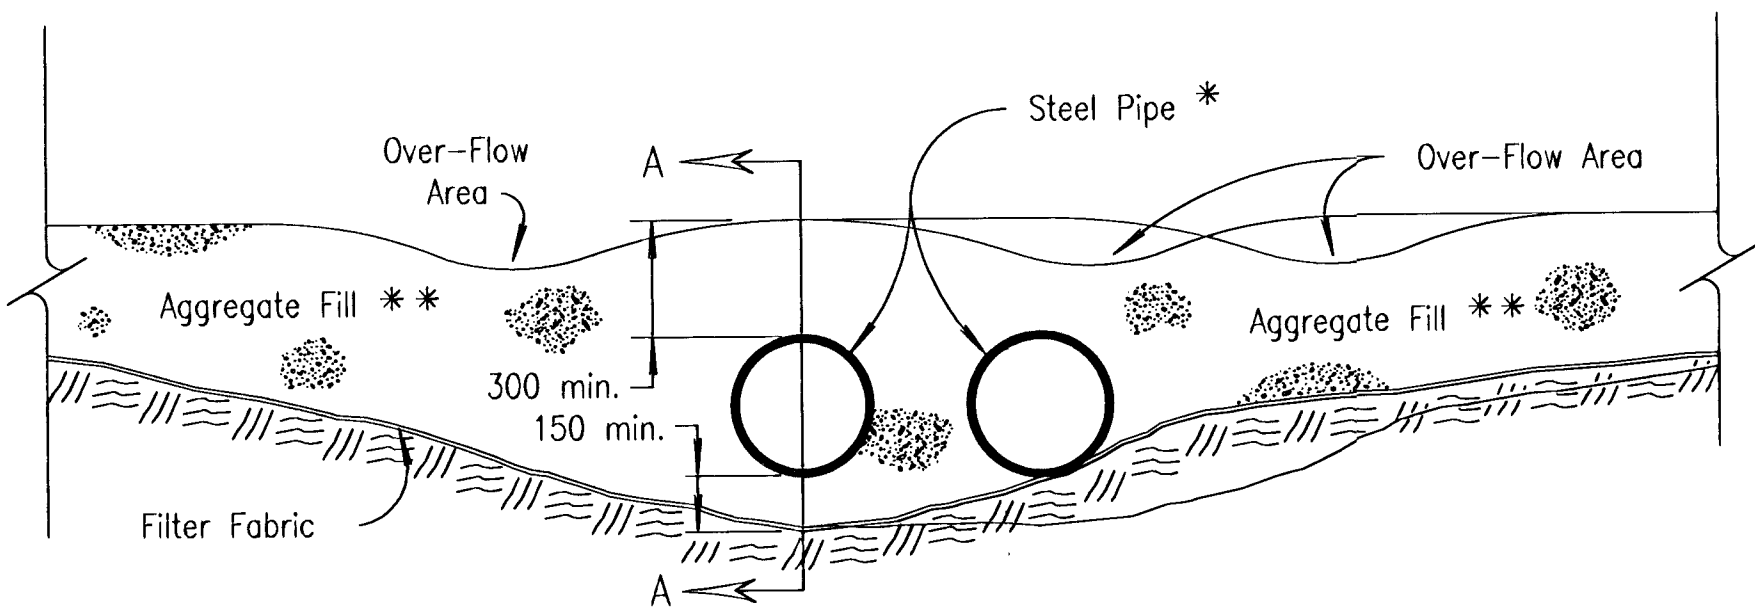

SECTION B-B

TEMPORARY STREAM CROSSING
NO SCALE

- * NOTE:
Quantity, length and diameter of steel pipe to be determined by design flow calculations.
- ** NOTE:
Alternate fill material may be used upon the approval of the Bureau of Construction and Maintenance, Field Construction Engineer.

3					
2	3/17/97	Revised Temp. Stream Crossing		WCL	RDR
1	7-5-95	Convert to SI		WCL	RDR
NO.	DATE	REVISIONS		BY	APP'D

KANSAS DEPARTMENT OF TRANSPORTATION					
TEMPORARY PROJECT WATER POLLUTION CONTROL					
TEMPORARY SLOPE DRAIN; STREAM CROSSING; INLET SEDIMENT BARRIER					
LA852C SI			67 OF 131		
F.H.W.A. APPROVAL	4/02/97	APP'D	Richard D. Ross		
DESIGNED	WCL	DETAILED	WCL	QUANTITIES	TRACED
DESIGN CK.	RDR	DETAIL CK.	WCL	QUAN. CK.	TRACE CK.