


BENCHMARKS:

#1: "□" CUT CHISELED ON CURB,
15.2' S. OF SW COR., LOT 6,
BLOCK A, ROCKY FORD 2ND
ADDITION.
ELEV. = 1385.10 NAVD88



#2: "□" CUT CHISELED ON CURB,
8.6' N. & 11.7' W. OF SW COR.,
LOT 14, BLOCK C, ROCKY FORD
2ND ADDITION.
ELEV. = 1380.11 NAVD88

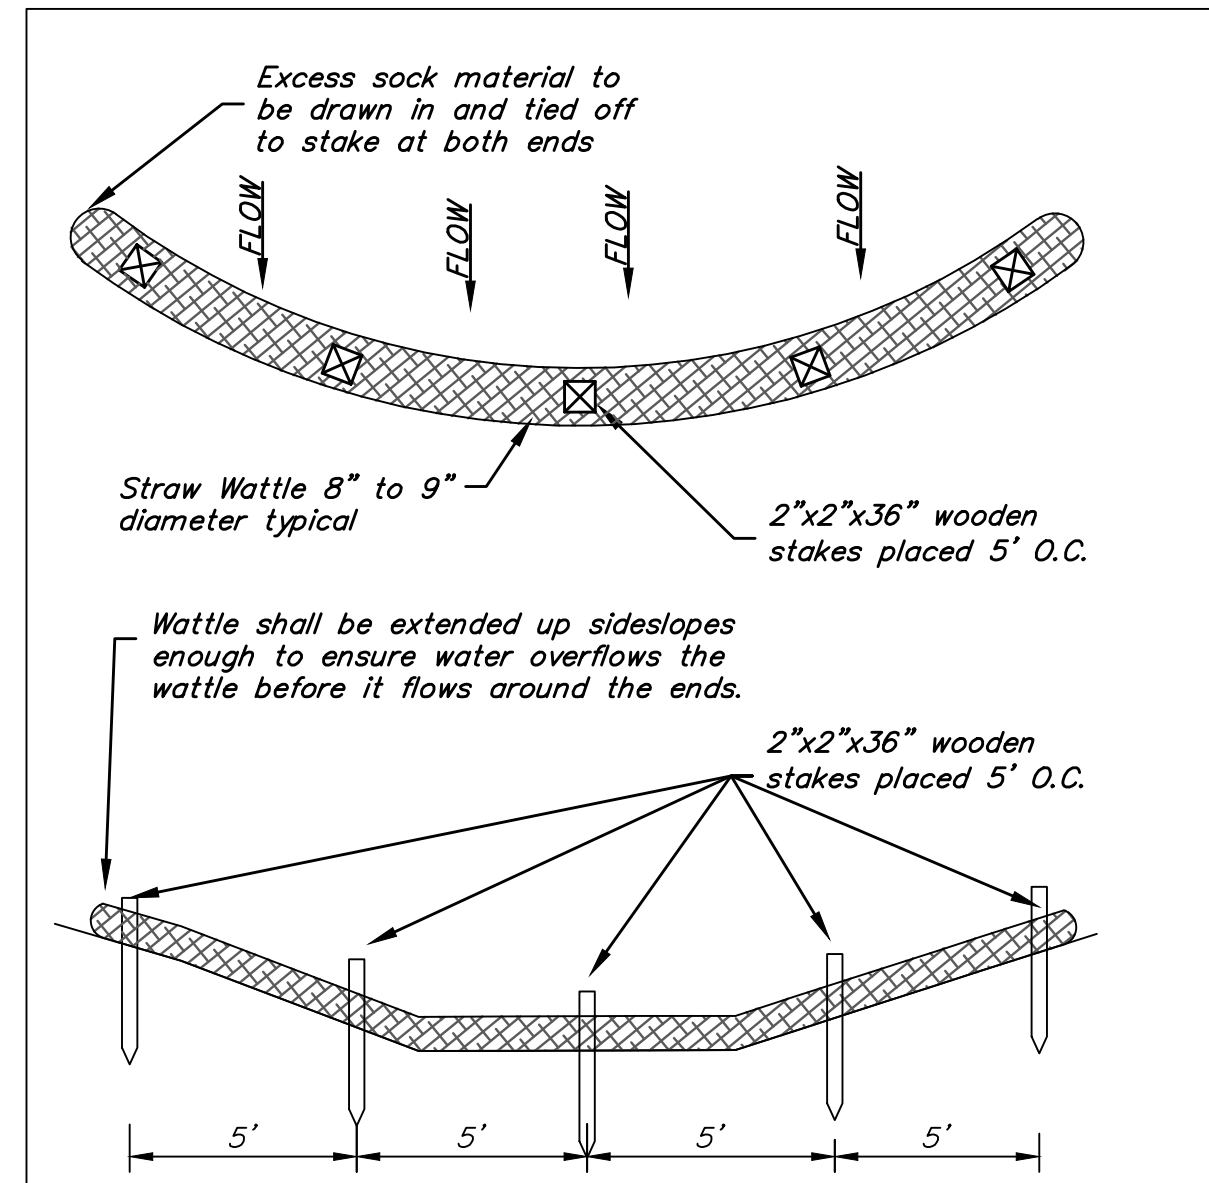

STRAW WATTLE DITCH CHECK DETAIL

NOTES:

1. All material to meet manufacturer specifications.
2. Ditch Check should be used in areas that drain 10 acres or less.
3. Sediment should be removed from behind check dam once the accumulated height has reached 1/2 height of the check dam.
4. Check dam can be direct seeded at the time of installation.
5. See Sheet X for spacing requirements.

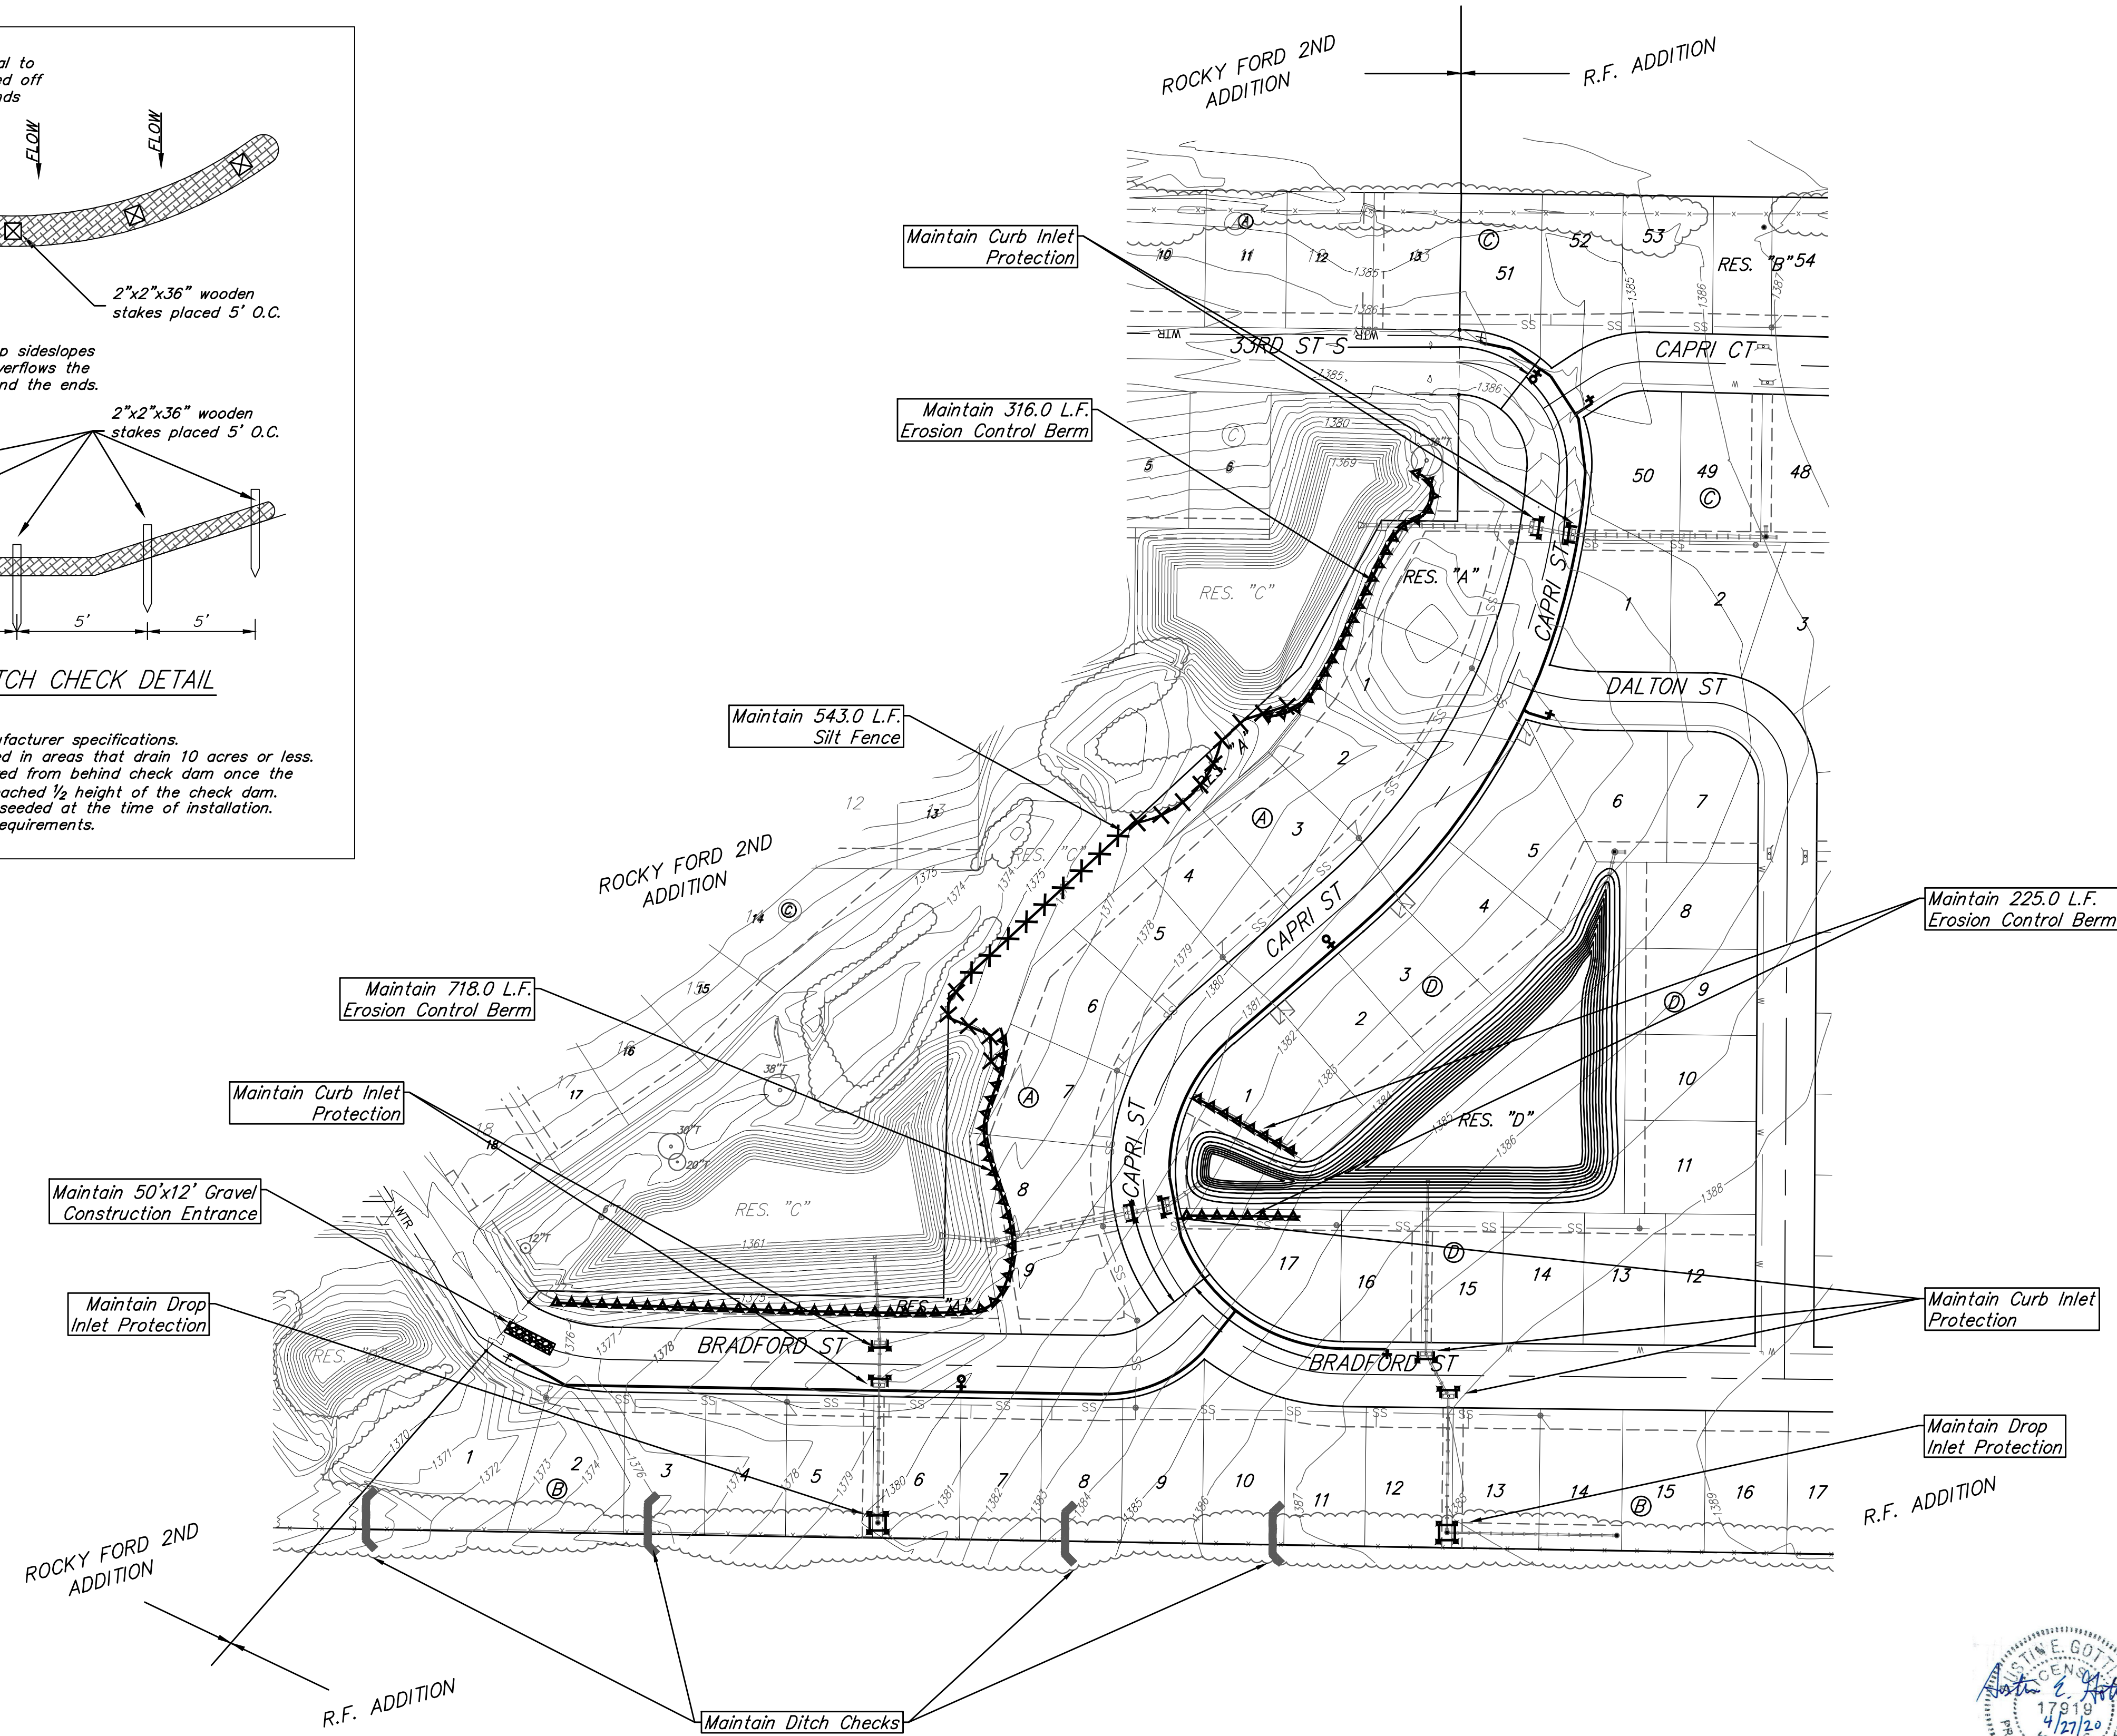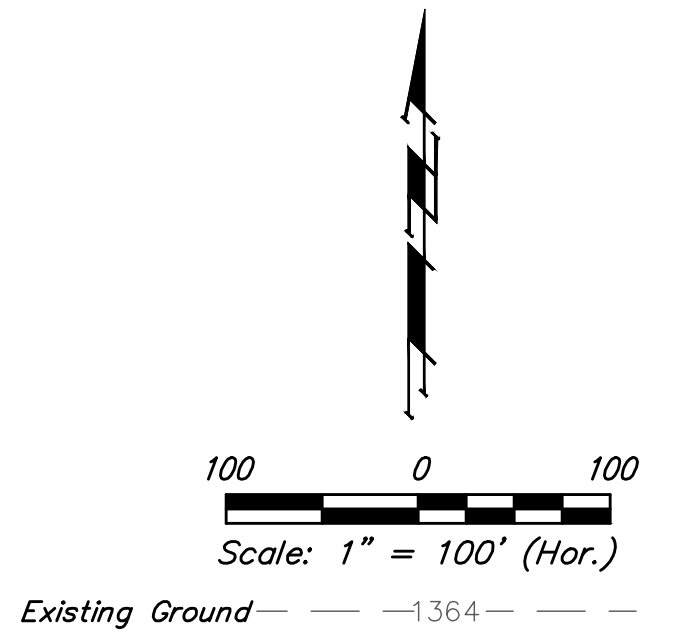

EROSION CONTROL LEGEND

- DROP INLET PROTECTION
- CURB INLET PROTECTION
- DITCH CHECKS
- SILT FENCING
- EROSION CONTROL BERM

EROSION CONTROL MEASURE	INSTALL	MAINTAIN
CONSTRUCTION ENTRANCE (EA)	0	1
SILT FENCE (LF)	0	54.3
DITCH CHECKS (EA)	0	4
CURB INLET PROTECTION (EA)	0	8
DROP INLET PROTECTION (EA)	0	2
EROSION CONTROL MAT (SY)	0	0
MULCH WATTLE SED. BARRIER (LF)	0	0
EROSION CONTROL BERM (LF)	0	1,259

* ALL EXISTING BMPs INCLUDING CONSTRUCTION ENTRANCE, SEDIMENT BARRIERS, SILT FENCE, CUT-OFF TRENCH, AND EROSION CONTROL MAT SHALL BE MAINTAINED AND REPAIRED IF NECESSARY.

Contractor shall make sure all erosion control is in place before project is accepted. This plan represents the minimum standard. Any additional erosion control measures shall be installed by the Contractor as needed.

Baughman
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

R.F. Addition - Phase I
EROSION CONTROL
Water Distribution System

Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316-262-7271 F 316-262-0149
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

PROJECT NUMBER
448-2019-005513

DESIGN: AEG
DRAWN: HW

APPROVED: [Signature]
DATE: 4/27/20

SCALE: Noted
SHEET: 8 OF 16

