

STREET PAVING FOR ZOO PARK CIRCLE WITH INCIDENTAL STORM WATER SEWER to serve **COX MACHINE 3RD ADDITION**

Zoo Park Cir. from the North Line of 21st Street North,
North to and including the Cul-de-sac.

CITY OF WICHITA, KANSAS

James L. Armour, P.E. City Engineer

Project Number
472-84820

O.C.A. Number
766239

GENERAL NOTES:

- Contractor will be required to provide notice to utility companies a minimum of forty-eight (48) hours prior to any excavation, as follows:

Kansas One-Call	687-2470
-----------------	----------

The Contractor must notify the following in case of an emergency:

Cox Communications	262-4270
Kansas Gas Service	1-888-482-4950
Westar Energy	383-8650
Aquila Energy	1-800-303-0357
AT&T	1-800-288-2020
City of Wichita Water Dept.	268-4563
City of Wichita Sewer Maint.	268-4024
City of Wichita Storm Sewer Maint.	268-4090
City of Wichita Traffic Maint.	268-4034
ConocoPhillips Pipeline Co.	1-877-267-2290
Southern Star Pipeline Co.	529-6600
Kinder-Morgan Pipeline Co.	1-888-844-5658
Quest Midstream Partners L.P.	1-800-467-2751
- Utility service lines, poles, valve boxes, meters, and etcetera are to be adjusted as necessary by others prior to construction unless the plans specifically call for their adjustment by the Contractor or unless the plans specifically identify a utility to be adjusted by its owner during construction. Existing utilities and their location, as shown on the plans, represent the best information obtainable for design. The Contractor will be required to work around existing utilities within the right-of-way which do not conflict with proposed construction.
- Rubble from the removal of miscellaneous structures and excess excavation which is to be wasted shall be disposed of on sites to be provided by the Contractor. These sites shall be approved by the Engineer as to suitability, appearance and site location. Locations, in the opinion of the Engineer, that will leave an unsightly appearance will not be approved. All disposal sites must be approved by the Kansas Department of Health and Environment. Material either stockpiled or disposed of in a flood plain would require a Kansas State Board of Agriculture permit. Any material dumped in waters of the United States or wetlands is subject to U.S. Corps. of Engineers permitting regulations. Any material buried or stockpiled beyond approved construction limits would require additional archaeological investigations unless buried in a previously approved borrow location.
- Trees and shrubs in public right-of-way which are in direct conflict with proposed new construction shall be removed by the Contractor ONLY with the Developer or Baughman Company approval. Trees and shrubs which are not in direct conflict with proposed new construction shall be saved and protected from damage.
- The Contractor shall give all property owners and/or tenants of developed property abutting the construction of this project a minimum of ten (10) days notice prior to start of construction.
- The Contractor shall be responsible for preserving property irons. The Contractor will be required to re-establish any property irons which are damaged or destroyed by his construction operations. Such irons shall be re-established by a licensed land surveyor in accordance with state laws.
- The contractor shall adjust valve boxes as necessary to match proposed grade. Cost to be included in bid item, "Site Clearing & Restoration."
- All existing and proposed erosion control measures including silt fencing, erosion control mat, straw bales, inlet barriers, and const. entrance shall be maintained throughout construction by the contractor and until project is accepted by the City of Wichita. The on-site engineer shall complete weekly reports on the status of erosion control measures. The contractor shall be required to comply with maintenance and/or replacement of erosion control measures as determined by the on-site engineer until project is accepted by City of Wichita.
- A saw cut of at least one-half the depth of existing surface courses or one-fourth the depth of the existing total pavement thickness shall be provided at locations where proposed construction abuts the existing surface course or pavement for which partial removal of that surface or pavement is required. Sawed joint to facilitate removal within three (3) feet of existing joints will not be permitted and for such instances the limits of removal shall extend to the existing joint. Such saw cuts will not be paid for directly and this cost shall be considered as subsidiary to the removal of the surface or pavement.
- Limits of earthwork shall match existing ground elevations at the right-of-way line unless otherwise noted on the plans or shown on cross section with a new finished grade elevation. When a new finished grade elevation is shown, the earthwork shall extend one foot beyond the right-of-way line and then slope up or down using permissible slopes to match the existing ground surface.
- All areas disturbed during construction shall be seeded as noted on the Erosion Control Plan. Contractor shall prepare ground per City of Wichita Specifications. All costs associated with seeding shall be included in bid item "Project Seeding"
- The Contractor shall drain any standing water in sump areas of the proposed pavement. Contractor shall overexcavate and recompact these areas as required to maintain compaction of 95% Standard Proctor Density. Cost to be incidental to pavement.
- No construction or equipment operation shall be allowed within ConocoPhillips, or Quest easements without first contacting a representative from the respective company no less than 48 prior to beginning construction. Contractor and all sub-contractors shall be required to attend a safety meeting with pipeline personnel prior to any mobilization.
- The Developer for this project is Steve Cox (316) 943-1342.


SHEET INDEX

Title Sheet	1
Mass Grading Plan	2-3
SWS Lines 1 & 1A	4-6
SWS Line 2	7-8
SWS Line 2A	9
SWS Line 3	10
Standard Manhole Detail	11
Reinforced Concrete Manhole	12
Type 1A Double Curb Inlet Detail	13
Manhole Frame and Cover Detail	14
Drop Inlet Detail	15
41' Pavement Detail	16
Sign Details	17
Zoo Park Circle	18-20
Erosion Control Plan	21-22
Erosion Control BMPs	23-26
Coordinate Sheet	27
Street Cross-Sections	28-31
Copy of Plat	32

BENCHMARKS


BM #1: CITY OF WICHITA
BENCHMARK DISC, 48.5' W. & 28'
N. OF Q. 21ST STREET NORTH AND
HOOVER STREET.
ELEV. = 1326.47 NGVD29

BM #2: RAIL ROAD SPIKE IN
POWER POLE 28' N. OF Q. OF
21ST STREET NORTH ALONG THE
WEST LINE OF THE PLAT.
ELEV. = 1327.25 NGVD29

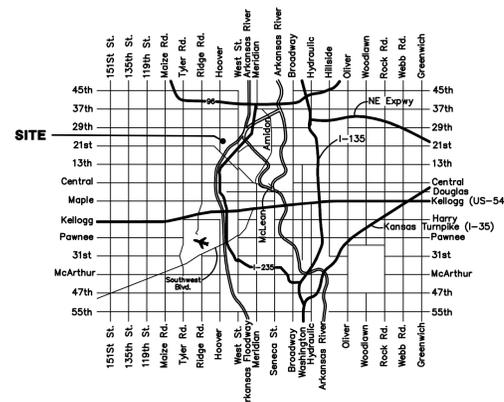

VICINITY MAP

Scale: 1" = 100'

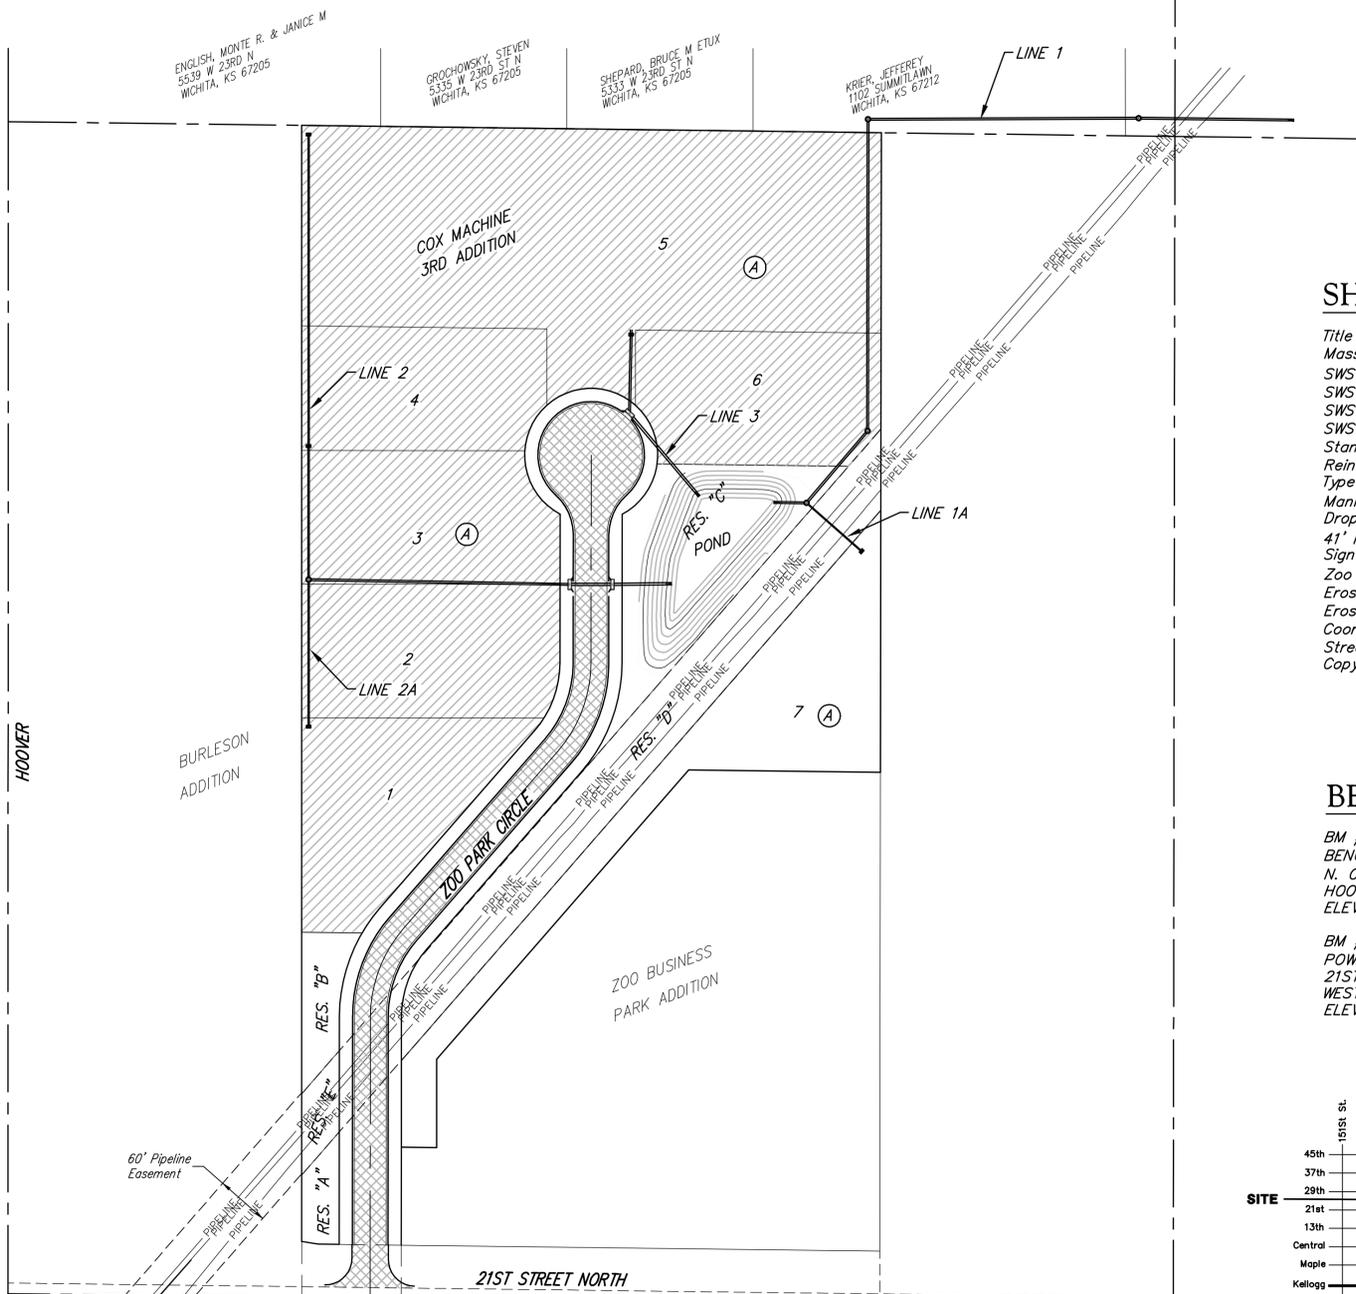

BENEFIT DISTRICT

PROPOSED ASPHALT



Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316-262-7271 F 316-262-0145
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

